
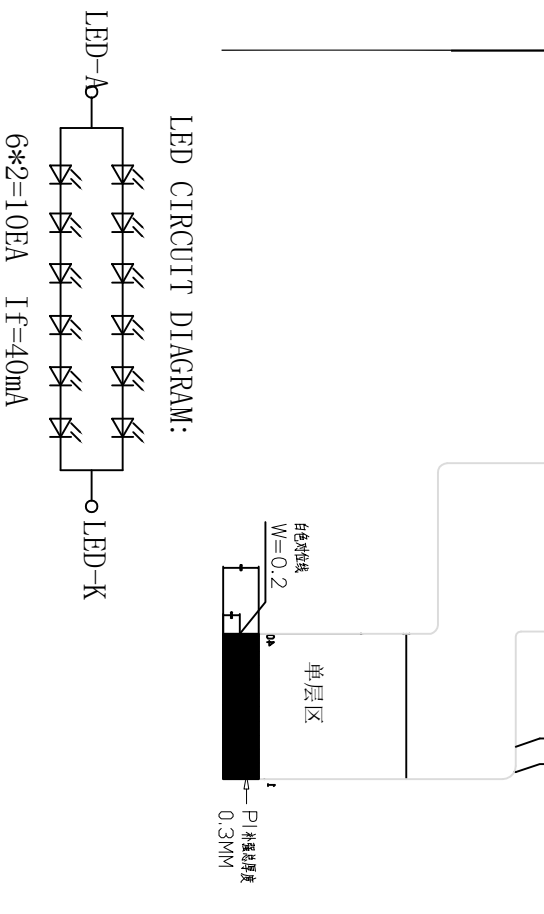


3.0±0.3



- NOTES:
1. DISPLAY TYPE: 4.3' (480*272) TN
 2. DISPLAY MODE: Normally White
 3. VIEWING DIRECTION: 6 O'Clock
 4. DRIVER IC: IL16485
 5. LCM (White 7 AVG 1/6) : Brightness: 750cd/㎡ (TYP)
Uniformity: 75%(MIN)
Chromaticity: 0.300+/-0.03; 0.330+/-0.03.
 6. BACK LIGHT: 7 chip white LEDs If=20mA, Vf=20.3~21.7V
 7. OPERATING TEMP: -20. C TO 70. C, STORAGE TEMP: -30. C TO 80. C
 8. * Critical Parameter, () ref Parameter, [] cpk Parameter
Unspecified Tolerances: +10, 20mm
Modification mark:
 9. SUGGESTION: TP window size unilateral increase 0.3~0.5mm than LCM A.A
 10. REQUIREMENTS ENVIRONMENTAL PROTECTION: RoHS

Dwg.No

Unmarked Tolerance	±0.2
Unit	mm
Version	A.0
Date	2020/8/7
Page	4/10

No	PIN NAME
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU