

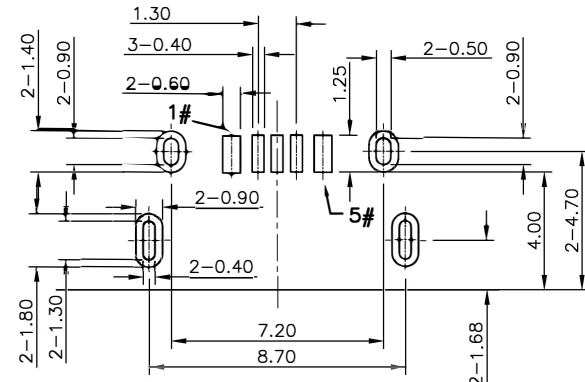





REV.	NOTES	DATE
A	RELEASED	2019/08/12

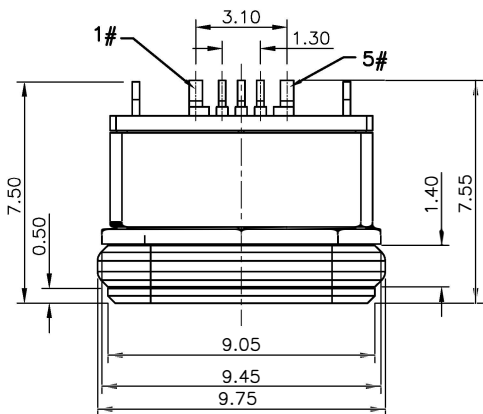



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ± 0.05

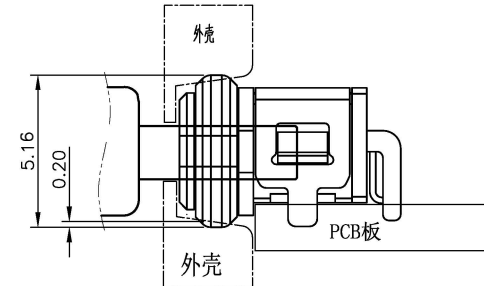

组装示意图

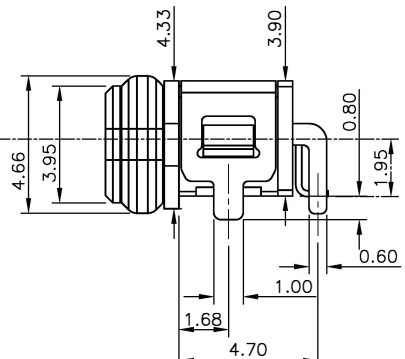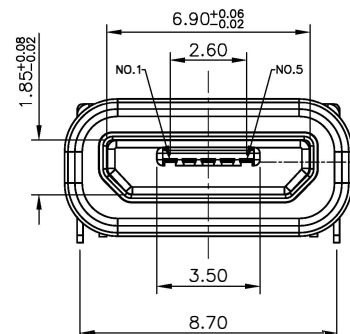

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 3A;
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - INSERTION FORCE: 2.5Kg (25N) Max.;
 - EXTRACTION FORCE: 0.8Kg (8N) Min.;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8.
 - PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
 - PACKAGING: REEL.

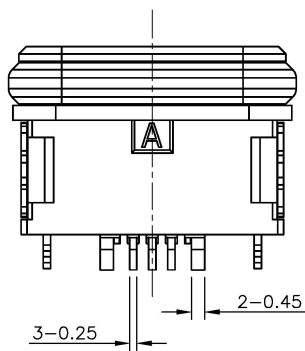

C	CONATCT	5	C2680 T=0.20	30" MIN REEL ALL OVERLAP ON THE SOLDER AREA
B	SHELL	2	SUS T=0.20/0.25	30u" Min. Ni PLATED
A	HOUSING	1	PA10T,UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

單位(UNITS)	mm				
數量(QTY)	N/A				
材料(MT'L)	SEE NOTE				
處理(FINISH)	SEE NOTE	圖名(NAME)			
繪圖(DRAW)					
設計(DE'N)		料號(PART NUMBER)		IE-YF-MicroUSB-B-H-IP67	
審校(CH'K)		圖號(DRAW NUMBER)			
核准(APP'D)		圖檔(FILE NAME .DWG)			
比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1/1
				版次(REV.)	A

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

DIMENSIONS
TOLERANCE
METRIC
X : ± 0.5
X.X : ± 0.38
X.XX : ± 0.25
ANGLES
X : $\pm 1^\circ$
X.X : $\pm 0.5^\circ$

