



REV	DESCRIPTIONS	DATE
01	NEW	2021.01.20


Front

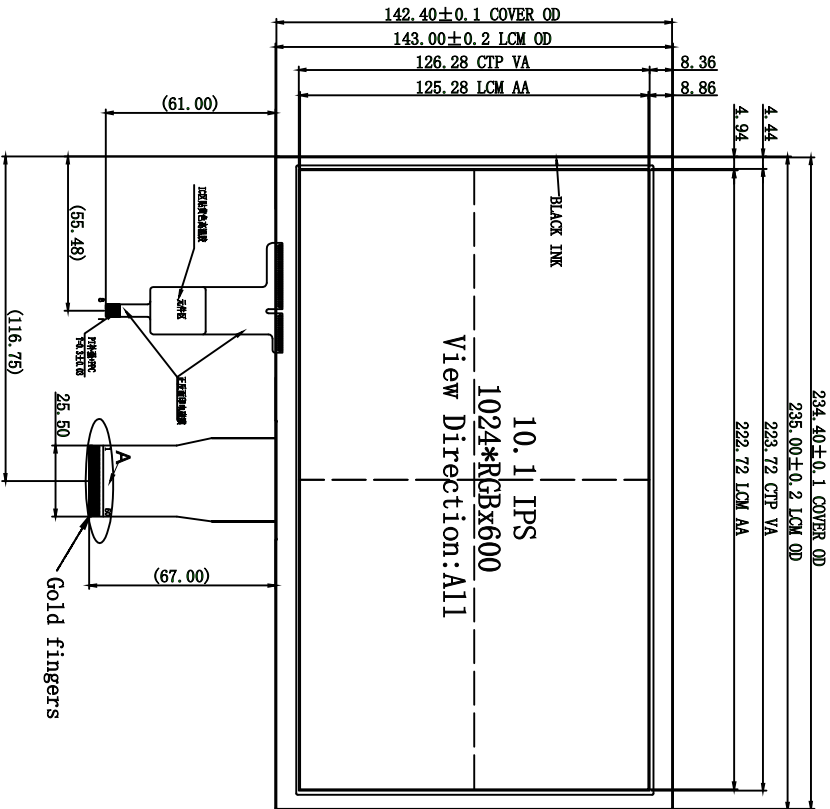

Side

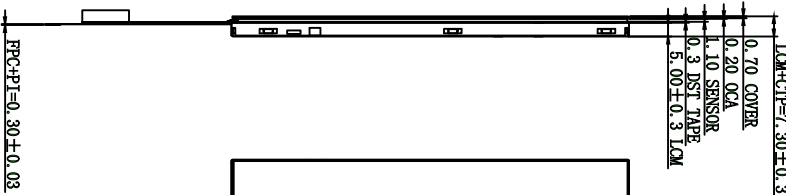


Back

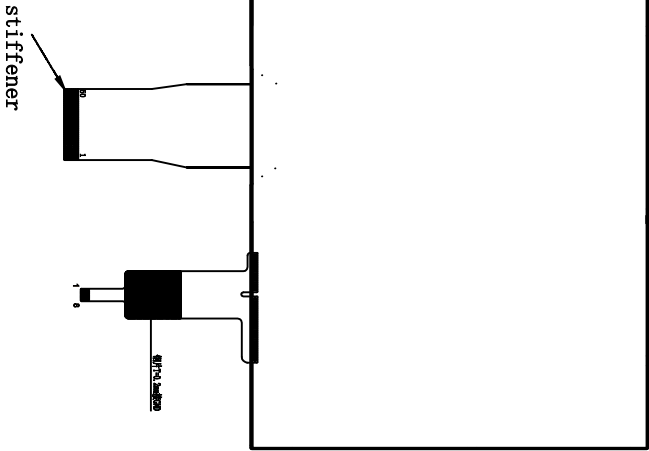

CTP Pin:	Assignment
1	VDD
2	GND
3	RST
4	SCL
5	SDA
6	INT
7	NC
8	NC

Pin	Symbol
1	VDD
2	GND
3	VDD
4	VDD
5	GND
6	VDD
7	VDD
8	VDD
9	VDD
10	VDD
11	VDD
12	VDD
13	VDD
14	VDD
15	VDD
16	VDD
17	VDD
18	VDD
19	VDD
20	VDD
21	VDD
22	VDD
23	VDD
24	VDD
25	VDD
26	VDD
27	VDD
28	VDD
29	VDD
30	VDD
31	VDD
32	VDD
33	VDD
34	VDD
35	VDD
36	VDD
37	VDD
38	VDD
39	VDD
40	VDD
41	VDD
42	VDD
43	VDD
44	VDD
45	VDD
46	VDD
47	VDD
48	VDD
49	VDD
50	VDD



- NOTES:
1. Display size: 10.1"IPS 1024*600
 2. Viewing direction: Full View
 3. Display mode: Transmissive/Normal black/Anti-glare
 4. Operation temperature: -20°C~+70°C
 5. Storage temperature: -30°C~+80°C
 6. Brightness: 500(typ)cd/m²
 7. CTP Driver IC: GT911
 8. Unspecification tolerance are ±0.2mm

Approved By		SIZE: TFT_LCD 10.1"
Checked By		DRAWING NO.: IE-A-2219CH04R24L-C0-1
Drawn By	Bruce	CUSTOMER NO.
UNIT: mm		