

# PRODUCT SPECIFICATION

<b>Customer</b>	
<b>Project</b>	
<b>Part No.</b>	<b>IE-M-2614CV05MP-CBPS-1</b>
<b>Remarks</b>	<input type="checkbox"/> APPOVAL FOR SPECIFICATION ONLY <input checked="" type="checkbox"/> APPOVAL FOR SPECIFICATION AND SAMPLE

<b>CUSTOMER</b>					
Approved By	Checked By	Prepared By	Approved By	Checked By	Prepared By
				Wen XiaoLi	Yang ZiFeng

## Revision Record

Rev. No.	Date	Description
V1.0	2022-08-04	Preliminary Specification Release.

## Contents

1. General Specifications .....	3
2. Interface Definition Description .....	4
3. Mechanical Drawing .....	5
4. Electrical Specifications .....	7
5. Delivery Inspection .....	11
6. Reliability Test .....	13
7. Precautions .....	14
8. Packing and Storage .....	16

# 1. General Specifications

No.	Item	Specification	Unit
1	Display Size (Diagonal)	5.5	inch
2	Display Resolution	720(H) × RGB × 1280 (V)	pixels
3	Pixel Pitch	31.5(H) × 94.5 (V)	um
4	LCM Outline Dimension (Without FPC)	71 (W) × 130.2 (H) × 1.67 (T)	mm
5	LCD Outline Dimension	70.04 (W) × 127.1 (H) × 0.4 (T)	mm
6	TLCM Outline Dimension (Without FPC)	80 (W) × 143 (H) × 3.62 (T)	mm
7	LCD Active Area	68.04 (W) × 120.96 (H)	mm
8	View Direction (Gray Inversion)	FULL VIEW	-
9	Driver IC	JD9365DA-H3	-
10	Pixel Arrangement	RGB-Stripe	-
11	Display Mode	Normal Black	-
12	Pixel driving Element	a-Si TFT	-
13	LCD Transmittance	Typ.: 3.47%	-
14	LCD Contrast Ratio	Typ.: 1000 Min:600	-
15	FPC Version	IE-M-2614CV05MP-CBPS-1	-
16	Interface	MIPI	-
17	Operating Temperature	-20°C~ 70°C	-
18	Storage Temperature	-30°C~ 80°C	-
19	Backlight Arrangement	LED/7 Series 2 Parallel (14 lights in total)	-
20	Luminance	TBD	nit
21	Weight	TBD	kg

## 2. Interface Definition Description

### 2.1 LCM PIN

PIN NO.	PIN DEF.	FUNCTION DESC.
1	LEDK	POWER SUPPLY- FOR BACKLIGHT CATHODE
2	NC	No Connection
3-4	LEDA	POWER SUPPLY+ FOR BACKLIGHT ANODE
5	NC	No Connection
6	LPTE	Serves TE (Tearing Effect) PIN
7	LCDID1	LCD ID PIN
8	LCM_RST	LCM RESET PIN
9	LCDID2	LCD ID PIN
10	LCD_1V8	I/O POWER SUPPLY (1.8V)
11	NC	No Connection
12-13	LCD_2V8	POWER SUPPLY (2.8V)
14	NC	No Connection
15	GND	Ground
16	MIPI_TDP3	Positive MIPI differential data input
17	MIPI_TDN3	Negative MIPI differential data input
18	GND	Ground
19	MIPI_TDP2	Positive MIPI differential data input
20	MIPI_TDN2	Negative MIPI differential data input
21	GND	Ground
22	MIPI_TCP	Positive MIPI differential CLOCK input
23	MIPI_TCN	Negative MIPI differential CLOCK input
24	GND	Ground
25	MIPI_TDP1	Positive MIPI differential data input
26	MIPI_TDN1	Negative MIPI differential data input
27	GND	Ground
28	MIPI_TDP0	Positive MIPI differential data input
29	MIPI_TDN0	Negative MIPI differential data input
30-31	GND	Ground

RST voltage should be consistent with LCD\_1V8 voltage, or there probably is black screen fault when power on.

### 2.2 TP PIN

PIN NO.	PIN DEF.	FUNCTION DESC.
1	AVDD	POWER SUPPLY
2	GND	Ground
3	SDA	TP I2C data (SDA) data input (MOSI)
4	SCL	TP I2C clock (SCL) clock (SCLK)
5	INT	TP Interrupt PIN
6	RST	TP Reset PIN



# 3.2 TLMC

### 正视图

### 侧视图

### 背视图

### 所有标注单位均为: (MM)

1	产品规格型号 Structure	Glass/Glass
2	COVER LENS 膜名称/膜透射率	化学钢化 Chemically
3	COVER LENS 表面硬度 Surface Hardness	≥8H
4	无油膜/透光率/透光透射率	>80%
5	工作温度/Operation temperature	-10°C~60°C, 5300h/L
6	贮存温度/Storage temperature	-20°C~70°C, 5300h/L
7	是否进行物理处理?	是 <input checked="" type="checkbox"/> 否 <input type="checkbox"/>
8	是否进行物理处理?	是 <input checked="" type="checkbox"/> 否 <input type="checkbox"/>
9	功能片与TP 是否同层叠成?	是 <input checked="" type="checkbox"/> 否 <input type="checkbox"/>

**接口类型 Interface**

接口类型:  IIC  USB  UART

供电电压:  3.3V/5V  1.8V/1.5V  3.3V  1.8V

NO.550 主板上是否有上拉电阻  是  否

1 产品规格型号 Structure

2 COVER LENS 膜名称/膜透射率

3 COVER LENS 表面硬度 Surface Hardness

4 无油膜/透光率/透光透射率

5 工作温度/Operation temperature

6 贮存温度/Storage temperature

7 是否进行物理处理?

8 是否进行物理处理?

9 功能片与TP 是否同层叠成?

**接口类型 Interface**

接口类型:  IIC  USB  UART

供电电压:  3.3V/5V  1.8V/1.5V  3.3V  1.8V

NO.550 主板上是否有上拉电阻  是  否

TP=0.3±0.05 PI 外强+PFC

1.06 IC 焊锡胶

0.2 刚片外强

TP=0.3±0.05 PI 外强+PFC

0.99.00 此处折弯折后 FPC 凸出部位, 请避开

IC: 厚度 1.00MM, 表面附黄  
色保护膜 0.05MM / 总厚度  
1.05MM, 请主面留空

焊胶厚度 0.05MM / 总厚度  
色保护膜 0.05MM / 总厚度  
1.05MM, 请主面留空

IC: 厚度 1.00MM, 表面附黄  
色保护膜 0.05MM / 总厚度  
1.05MM, 请主面留空

焊胶厚度 0.05MM / 总厚度  
色保护膜 0.05MM / 总厚度  
1.05MM, 请主面留空

1 AVDD

2 GND

3 SDA

4 SCL

5 INT

6 RST

Pin 定义说明 (GND 时贴 0R 电阻)

1 LEDK

2 NC

3 LEDA

4 LEDA

5 NC

6 J1PTE

7 LCD(D)1

8 LCM\_RST

9 LCD(H)2

10 LCD\_1V8

11 NC

12 LCD\_2V8

13 LCD\_2V8

14 NC

15 GND

16 M1P1\_TP3

17 M1P1\_TP3

18 GND

19 M1P1\_TP2

20 M1P1\_TP2

21 GND

22 M1P1\_TCP

23 M1P1\_TCN

24 GND

25 M1P1\_TDP1

26 M1P1\_TDP1

27 GND

28 M1P1\_TDP0

29 M1P1\_TDP0

30 GND

31 GND

UNIT: mm

Drawn By: 陈武

Checked By:

Approved By:

DESCRIPTION: 总成

PART NO.: IE-M-2614C(V05W)-C8P3-1

DATE: 2021.12.17

REVISED DESCRIPTION: 1ST

VER: 1

## 4. Electrical Specifications

### 4.1. LCD Optical Characteristics

Item	Symbol	Conditions	Specification			Unit	Note	
			Min.	Typ.	Max.			
Transmittance (With PL)	T(%)	Viewing normal angle $x = y = 0$	-	3.47	-	%	-	
Contrast Ratio	CR		600	1000	-	-	-	
Response Time	TR+TF		-	25	35	ms	-	
Viewing Angle	Hor.	$\Theta_{x+}$	CR $\geq$ 10 at 25°C	75	80	-	deg.	-
		$\Theta_{x-}$		75	80	-		
	Ver.	$\Theta_{y+}$		75	80	-		
		$\Theta_{y-}$		75	80	-		

### 4.2. Electrical Specifications

Item	Symbol	Specification			Unit
		Min.	Typ.	Max.	
Power For Analog Circuit	AVDD	4.5	-	6.3	V
TFT Gate On Voltage	VGH	15.5	16	16.5	V
TFT Gate Off Voltage	VGL	-12.5	-12	-11.5	V
TFT Common Electrode Voltage	Vcom	-1.52	-1.22	-0.92	V

### 4.3. Typical Operating Conditions

Item	Symbol	Min.	Typ.	Max.	Unit
Analog Supply Voltage	LCD_2V8	2.5	2.8	6.0	V
I/O Supply Voltage	LCD_1V8	1.65	1.8	3.6	V
Input High Voltage	VIH	$0.7 \times \text{LCD\_1V8}$	-	LCD_1V8	V
Input Low Voltage	VIL	0	-	$0.3 \times \text{LCD\_1V8}$	V

Output High Voltage	VOH	$0.8 \times \text{LCD\_1V8}$	-	LCD_1V8	V
Output Low Voltage	VOL	0	-	$0.2 \times \text{LCD\_1V8}$	V

#### 4.4. Backlight Circuit Specifications

Item	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Current	I <sub>B</sub>	-	40	-	mA	-
Voltage	V <sub>f</sub>	19.6	21.7	22.4	V	-
LCM Uniformity	-	80	-	-	%	If=40mA
Life Time	-	30000	-	-	Hr.	
Power Consumption	PBL	-	868	-	mW	
TLCM Chromaticity Coordinate	Red	R <sub>x</sub>	TBD	TBD	TBD	Average the brightness EV at 9 points, Optical Instrument BM-7
		R <sub>y</sub>	TBD	TBD	TBD	
	Green	G <sub>x</sub>	TBD	TBD	TBD	
		G <sub>y</sub>	TBD	TBD	TBD	
	Blue	B <sub>x</sub>	TBD	TBD	TBD	
		B <sub>y</sub>	TBD	TBD	TBD	
	White	W <sub>x</sub>	TBD	TBD	TBD	
		W <sub>y</sub>	TBD	TBD	TBD	


#### 4.5. LCD Power Consumption

Mode	Symbol	Typ.	Max.	Unit
Normal Mode	LCD_2V8+LCD_1V8	-	-	mA
Test Condition: LCD_2V8=2.8V.				
Interface Drive Type: row flipping or column flipping.				
IPS Type LCD Panel => All Black Pattern.				
TN Type LCD Panel => All White Pattern.				
Temperature: 25°C.				
Mode	Symbol	Typ.	Max.	Unit

Sleep Mode	LCD_2V8+LCD_1V8	-	-	$\mu\text{A}$
Test Condition: LCD_2V8=2.8V.				
DC/DC converter is enabled. Internal oscillator is started and panel scanning is started.				
Except for the IC internal crystal oscillator and panel scanning, other functions are suspended.				
Temperature: 25°C.				


## 4.6. Measuring System

### 4.6.1. LCM Viewing Angle

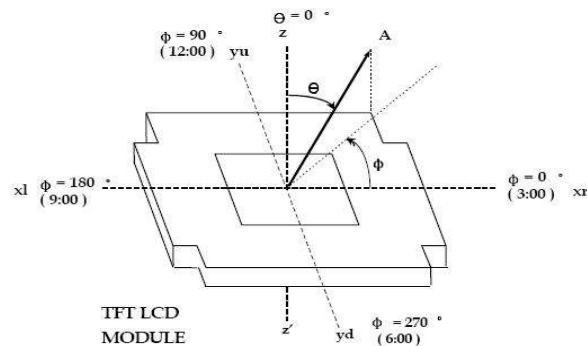

Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface.

### 4.6.2. Response Time

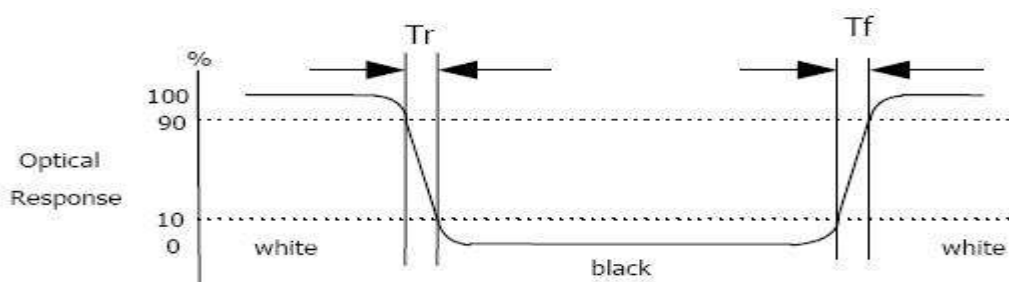

Response time is the time required for the display to transition from white to black (Rising time,  $T_r$ ) and from black to white (Falling time,  $T_f$ ) for additional information.

### 4.6.3. Contrast Ratio (CR)

Contrast Ratio (CR) is defined mathematically as:


$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

Surface luminance is the center point across the LCD surface 500mm from the surface with all pixels displaying white.

## 4.7. Power On / Power Off


### 4.7.1. Power On

BOOSTM[1:0]=00 (External AVDD/AVEE/VGH/VGL)  
 IOVCC=VCCH=1.65V ~ 3.6V, VCI=VCIP=AVDD=4.5V ~ 6.0V, AVEE=-4.5V~-6.0V, VGH=7V~20V, VGL=-7V~-15V  
 Power on:

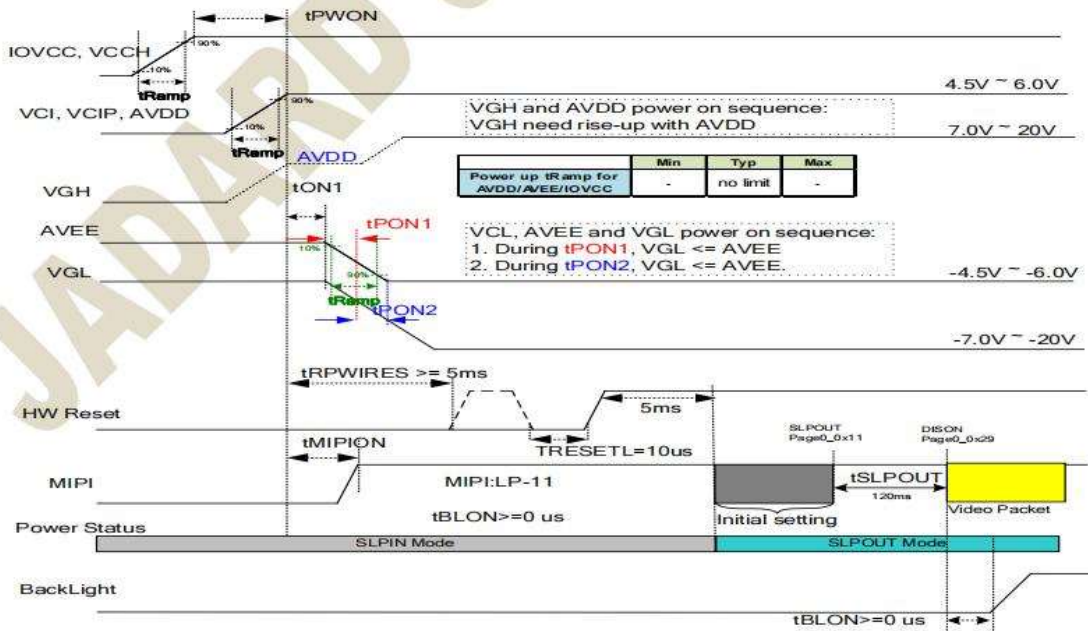

### 4.7.2. Power Off

BOOSTM[1:0]=00 (External AVDD/AVEE/VGH/VGL)  
 IOVCC=VCCH=1.65V ~ 3.6V, VCI=VCIP=AVDD=4.5V ~ 6.0V, AVEE=-4.5V~-6.0V, VGH=7V~20V, VGL=-7V~-15V  
 Power off: Case 1

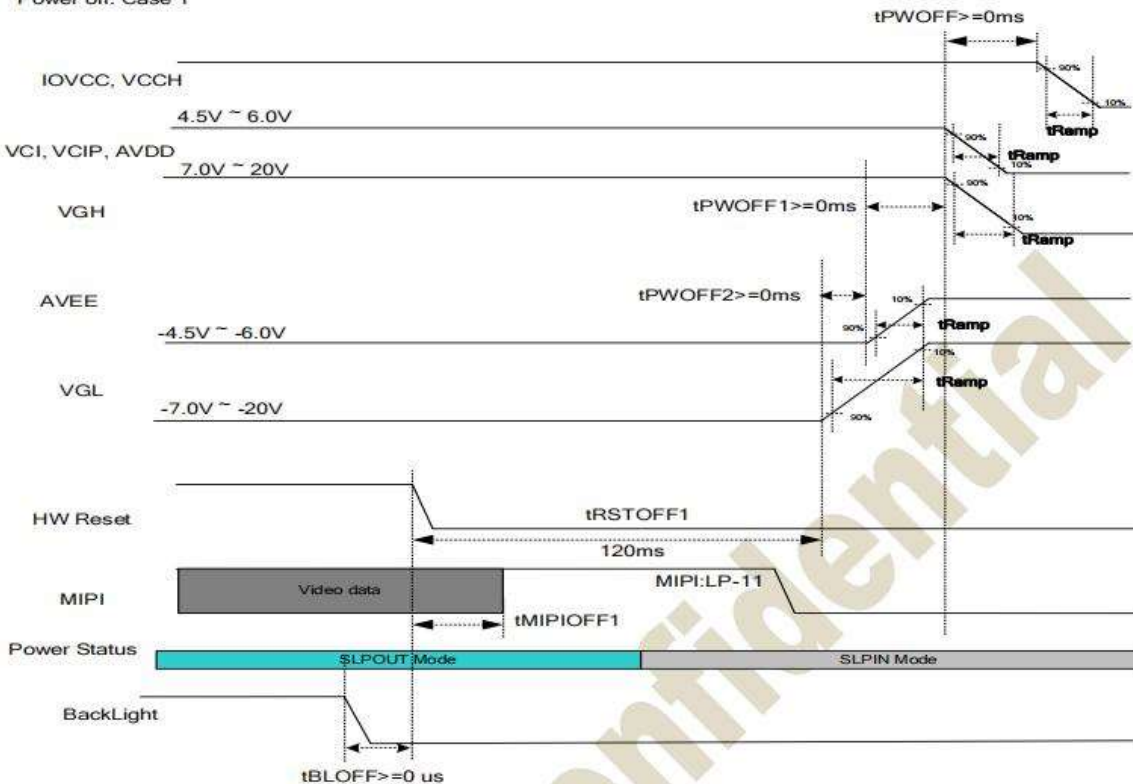


## 5. Delivery Inspection

### 5.1. Quality Inspection Environmental Conditions

5.1.1. Viewing distance: the normal viewing distance between the screen and the inspector is  $30\pm 5\text{cm}$ ; Inspection Angle:  $90^\circ\pm 45^\circ$  ( $90^\circ$  indicates that the inspector's perspective is perpendicular to the product to be inspected).

5.1.2. Visual inspection illumination:  $1000\pm 200\text{LUX}$ ; Electrical inspection illumination:  $200\pm 100\text{LUX}$ ; Ambient temperature  $25\pm 5^\circ\text{C}$ , ambient humidity  $55\pm 15\%\text{RH}$ .

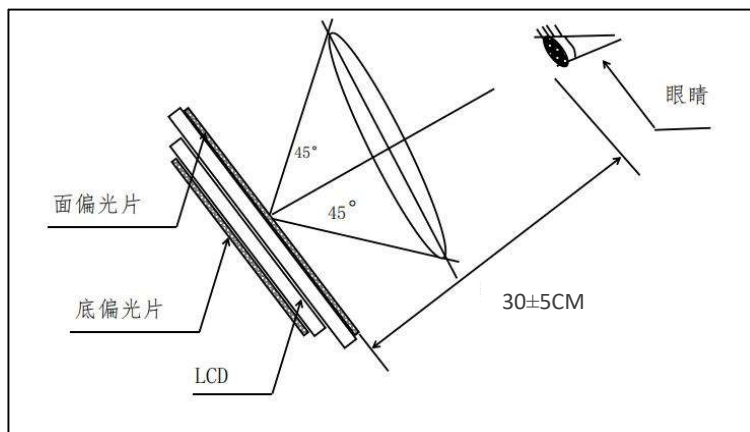

### 5.2. Quality Inspection Standard

No.	Defect	Standard		Defect Grade	Result
1	Spot Defect (including bright spot / color spot / bubble / dark spot, etc.)	< 7 inches	$\Phi \leq 0.10\text{mm}$	Ignore	OK
			$0.10\text{mm} < \Phi \leq 0.20\text{mm}$ DS $\geq 10\text{mm}$	Minor Defect	OK
			$\Phi > 0.20\text{mm}$	Serious Defect	NG
		$\cong 7$ inches	$\Phi \leq 0.15\text{mm}$	Ignore	OK
			$0.15\text{mm} < \Phi \leq 0.25\text{mm}$ DS $\geq 10\text{mm}$	Minor Defect	OK
			$\Phi > 0.25\text{mm}$	Serious Defect	NG
$\Phi$ : defect diameter. DS: spacing.					
2	Linear Defect (scratches,	< 7 inches	$W \leq 0.02\text{mm}$ , L: unlimited	Ignore	OK

	filaments, etc.)		0.02mm < W ≤ 0.03mm L ≤ 5mm		Minor Defect	OK
			W > 0.03mm		Serious Defect	NG
		≧ 7 inches	W ≤ 0.03mm L: unlimited		Ignore	OK
			0.03mm < W ≤ 0.05mm L ≤ 5mm		Minor Defect	OK
			W > 0.05mm		Serious Defect	NG
		W: defect width. L: defect length. DS: spacing.				
3	Polarizer Bubble	Display Area	Judge by Spot Defect			
		Black Edge Area	The distance from the edge of the display area is greater than 0.5mm.		Minor defect	OK
			The distance from the edge of the display area is less than 0.5mm.		Judge by Spot Defect	
4	Polarizer Bump (Mark)	Display Area / Black Edge Area	Invisible when the touch screen or cover plate is assembled.		Minor Defect	OK
5	Color and Luminance	Item	Method	Instrument	Median	Tolerance Range
		Color	x, y Color Coordinate	Optical Instrument BM-7	According to the actual test on the sample confirmed by the customer.	± 0.04
		Luminance	Average the brightness EV at 9 points	Optical Instrument BM-7	According to the actual test on the sample confirmed by the customer.	± 20%
6	Other Standards	Subject to the negotiation by both parties.				

7	Warranty Period	One year after sale.
8	Guarantee	ROHS、REACH

## 6. Reliability Test

Item	Condition	Result Determination
High-Temperature Storage	80°C 120H	<p>After the test, leave the LCD samples indoors at normal temperature and humidity for 2H for function and appearance inspection.</p> <p>The sample should meet the requirements on electrical performance, but be free from the following defects:</p> <ol style="list-style-type: none"> <li>1. Air bubble in the module,</li> <li>2. No display,</li> <li>3. Glass crack.</li> </ol>
Low-Temperature Storage	-30°C 120H	
High-Temperature Operation	70°C 120H	
Low-Temperature Operation	-20°C 120H	
High-Temperature and High-Humidity	0°C 90%RH 120H	
Thermal Cycling Test	-20°C/0.5H ~ +70°C/0.5H 100 cycles in total	
Vibration Test	Frequency: 10Hz ~ 55Hz ~ 10Hz Amplitude: 0.75mm Cycle once a minute, 30 cycles in total (Packing Condition)	
ESD Test	±4kV Human Body Mode 150pF/330Ω ±8kV Air Mode 150pF/330Ω	

**Note:**

- 1) Each module under test can only be used for one of the test items.
- 2) The quantity of samples for each test item is 2.
- 3) Fault Judgment Criterion: Basic Specifications, Electrical Specifications, Mechanical Specifications, Optical Specifications.

## 7. Precautions

- 7.1. The display screen consists of glass and polarizer. Since the glass is fragile, the user must pay special attention to the edge area, and protect it from falling, vibration, or mechanical impact.
- 7.2. If the display screen is damaged and the liquid crystal material leaks, be sure not to get any in the mouth. If the liquid crystal material contacts the skin or clothes, flush off with soap and water.
- 7.3. Do not apply excessive force to the display screen or the joint part, or the color will change. Do not touch the display screen with bare hands, which will stain the display area and degraded insulation between terminals (some of the appearance is determined by the polarizer).
- 7.4. The polarizer covering the display panel of the LCD module is soft and easy to be scratched, be sure to handle carefully. Do not touch, impact, press, or rub the exposed polarizers with anything harder than an HB pencil lead (e.g.: glass, tweezers, etc.). Do not place or attach anything onto the display area to avoid leaving marks. The condensed material on the surface or terminals due to cold will damage or stain the polarizer. After the test in low temperature environment, the product must be warmed up in a container before put into the room temperature environment.
- 7.5. If the display panel is stained, blow warm air onto the surface and gently wipe it with a soft and dry cloth. If it is seriously contaminated, wipe it with a wet cloth dipped in one of the following solvents:
  - glycerol
  - ethyl AlcoholDo not scrub, and avoid damaging the display panel.
- 7.6. Solvents other than those mentioned above may damage the polarizer. In particular, never use any of the following solvents:
  - water
  - ketone
  - areneWipe off saliva or water drop immediately, the contact with water over a long period of time may cause deformation or color fading. Avoid contact with oil or grease.
- 7.7. Special note: minimize electrode corrosion. Because electrode corrosion can be accelerated by water droplets, condensation of humidity, or electrification in a high humidity environment.
- 7.8. Assemble the LCD Module by the mounting holes. Make sure the LCD module make sure there is no bending, distortion, or deformation. Do not forcibly pull or bend the transmission wire or the backlight wire.

- 7.9. Do not disassemble the LCD module.
- 7.10. NC terminal should be disconnected. Do not connect any device.
- 7.11. If the logic circuit power supply is off, do not send the input signal.
- 7.12. Since the LCD module is integrated with CMOS, pay special attention to the modules. To prevent electrostatic damage, be careful to maintain a suitable work environment.
- Make sure the module has the same potential as the human body before take the LCD module out of the packing box for assembly. The reliable grounding is necessary during module processing.
  - The required tool, such as the electric soldering iron, must be reliably grounded. Make sure the it is connected to AC power supply, and no electric leakage. When fixing the module with electric screwdriver, it must be grounded, to reduce the electromagnetic wave generated by the electric commutator spark as much as possible.
  - Do not assemble or operate under dry condition to reduce the static electricity. To reduce static electricity, the workplace must not be too dry. The recommended relative humidity is 50 - 60%. Keep your work clothes and work table grounded as much as possible
  - The LCD module is coated with a film to protect the display surface. Be careful when peeling off the film to reduce the generated static electricity.
- 7.13. Since the LCD module has high precision assembly and regulation, try to avoid excessive impact on the module or making any changes:
- Do not change the shape of the tab on the metal frame.
  - Do not drill any extra hole, modify the shape, or change the position of component on the printed circuit board.
  - Do not change or damage the pattern on the printed circuit board.
  - Never modify the zebra strip (conductive rubber) or heat seal connector.
  - Do not make any change with the electric soldering iron except for the joint.
  - Do not throw, bend or twist.

## 8. Packing and Storage


### 8.1. Packing Method

Step 1



Take 1pcs of the product, put it into a anti-static bag.

Step 2

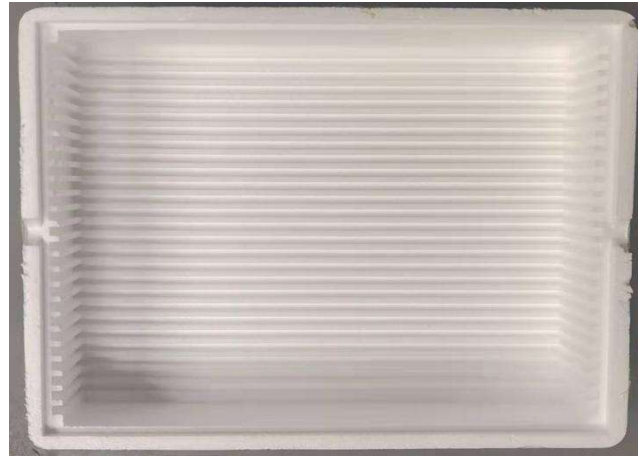

Take 2 bags of product to place into the carton, make sure they are surface to surface. Put a piece of EPE pad between the carton and the separator to protect the products.

Step 3



Put the products into cartons one by one, each carton contains 60 pieces of products.

Step 4



The cartons should be taped and shipped with labels.

### 8.2. Storage Method

Store in an ambient temperature of  $23\pm 5^{\circ}\text{C}$ , and in a relative humidity of  $60\pm 15\%$ . The storage period should not exceed 12 months. Do not expose to the sun for a long period of time.

8.2.1. Store in clean environment, free from dust, active gas, or solvent.

8.2.2. Store in anti-static environment.