


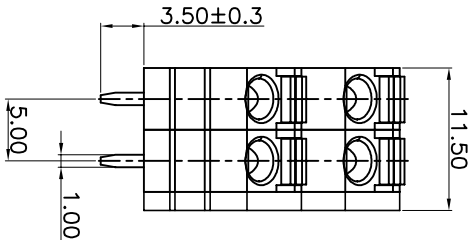
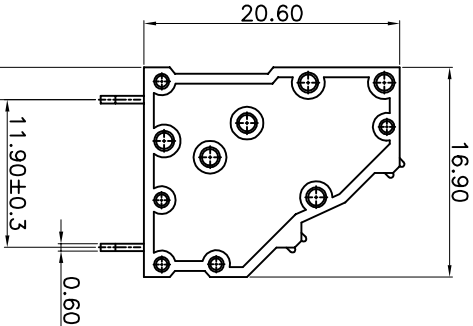


REV	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2025.2.21		




- Material
 - ①Housing : PA66, UL94V-0
 - ②Cover : PA66, UL94V-0
 - ③Button : POM
 - ④Reed : Stainless steel
 - ⑤Pin header: Copper alloy, Tin plated
- Electrical
 - UL
 - IEC
 - Rated voltage : 300V 320V
 - Rated current : 10A 17.5A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 26-16AWG 1.5mm²
- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Strip length: 9-10mm
- Conform to REACH and RoHS

HOW TO ORDER
KF550H-5.0-2*XXP-1 X-XXXXX

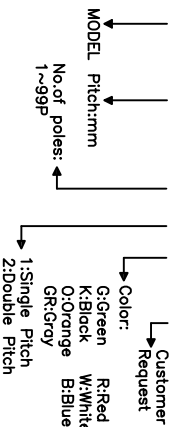

P.C.B.LAYOUT



Pitch range		Nominal dimension range						PROJECTION				TITLE	
>0	>6	>10	>20	>30	>60	>100	0.1/10	UNIT	mm	A4	SERIES	KF550	KF550H-5.0-2*2P-1K
~	~	~	~	~	~	<							
6	10	24	30	60	100	150		SHEET SIZE					
±0.15 ±0.20 ±0.30 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30							±2°						
DRAWING TYPE		CUSTOMER DRAWING											
SCALE		1:1	SHEET		1 OF 1								
DRAWING NO.													