





0.36" 3-Digit LED Display

Model NO. : IE-3R-10361NC-G

Chip (Ta=±25℃)		PIN	Drive Mode	Face
Quantity	Emitting color	10.28	Common Anode	
24ea	Red			Grey

Package Outlines


(unit:mm)

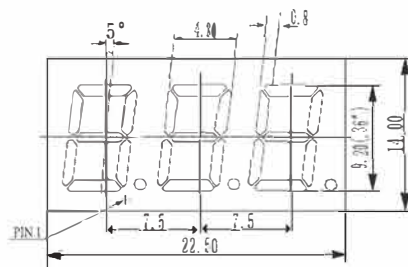

Notes:

1. All dimensions are in millimeters (inches);
2. Tolerances is ±0.25 (0.01") unless otherwise noted.

Internal Circuit:

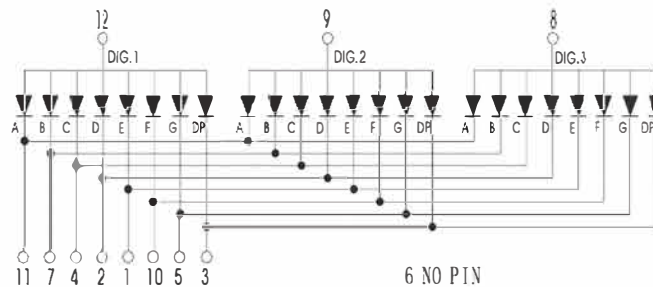

0.36" 3-Digit LED Display

Model NO. : IE-3R-10361NC-G

■ Absolute Maximum Ratings (Ta=+25℃)

Characteristics	Symbol	Rating	Unit	Remarks
Forward current / segment	I_F	30	mA	—
Peak forward current / segment	$I_{F(Peak)}$	100	mA	1/10 Duty Cycle
Reverse Voltage / segment	V_R	5	V	—
Operating Temperature	T_{Opr}	-25~+80	℃	—
Storage Temperature	T_{Stg}	-40~+85	℃	—
Solder Temperature	T_{Sol}	260	℃	≤5 seconds
Power Dissipation / segment	P_d	65	mw	—

■ Electro-Optical Characteristics (Ta=25℃):

Parameter	Symbol	Test condition	Min.	Typ.	Max.	Unit
Forward Voltage/segment	V_F	$I_F=20mA$	1.65	2.0	2.4	V
Dominant Wavelength	λ_d	$I_F=20mA$	625	630	635	nm
Spectrum width (Half value)	$\Delta\lambda$	$I_F=20mA$	—	25	—	nm
Luminous Intensity/segment	I_V	$I_F=20mA$	—	30	—	mcd
Reverse current/segment	I_R	$V_R=5V$	—	—	10	μA