





cable gland

OVERALL SOLUTION EXPERT

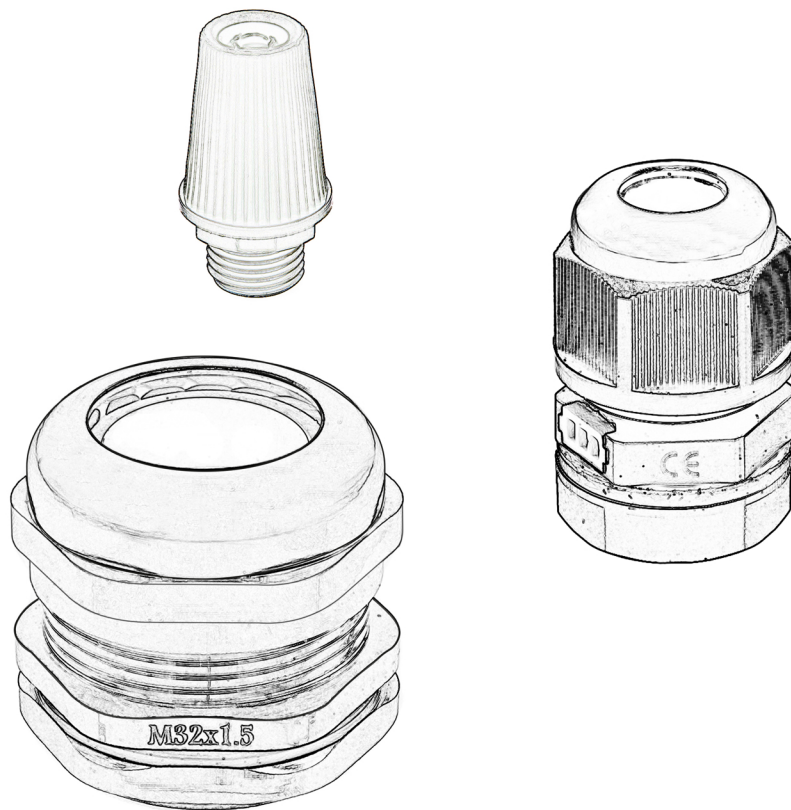

Nylon Round Waterproof Screw Plug PG/Metric Type


- **Material:** Adopting nylon PA66 certificated by UL
- **Weather strip:** Made of UL approved nylon PA66(fire rating UL94V-2)
- **Working temperature:** -40℃ to 100℃
- **Protection Degree:** IP68 (within fastening range, 0 type was her will be used in tightening part)
- **Color:** Light grey(RAL7035), black(RAL9005), other color can be customized according to request



Model	Thread O. D. AG (mm)	Thread Length GL (mm)	Main Body Dimensions H (mm)	Cover Dimensions D (mm)
PG7	12.5	8.5	12.5	15
PG9	15.2	9	13	19
PG11	18.6	9	13	22
PG13.5	20.4	9	13	25
PG16	22.5	10	14.5	27
PG19	24	10.5	15.5	29
PG21	28.3	10.5	15.5	33
PG25	30	11	16	35
PG29	37	12	16	44
PG36	47	13.5	18	55
PG42	54	13.5	18	62
PG48	59.3	14.5	19	68

Model	Thread O. D. AG (mm)	Thread Length GL (mm)	Main Body Dimensions H (mm)	Cover Dimensions D (mm)
M12X1.5	12	8.5	12.5	15
M16X1.5	16	9	13	19
M18X1.5	18	9	13	22
M20X1.5	20	9	13	25
M22X1.5	22	10	14.5	27
M24X1.5	24	10.5	15.5	29
M25X1.5	25	10.5	15.5	30
M27X1.5	27	11	15.5	33
M30X1.5	30	11	16	35
M32X1.5	32	11	16	38
M40X1.5	40	11.5	16	46
M50X1.5	50	13.5	18	56
M63X1.5	63	14	19	68



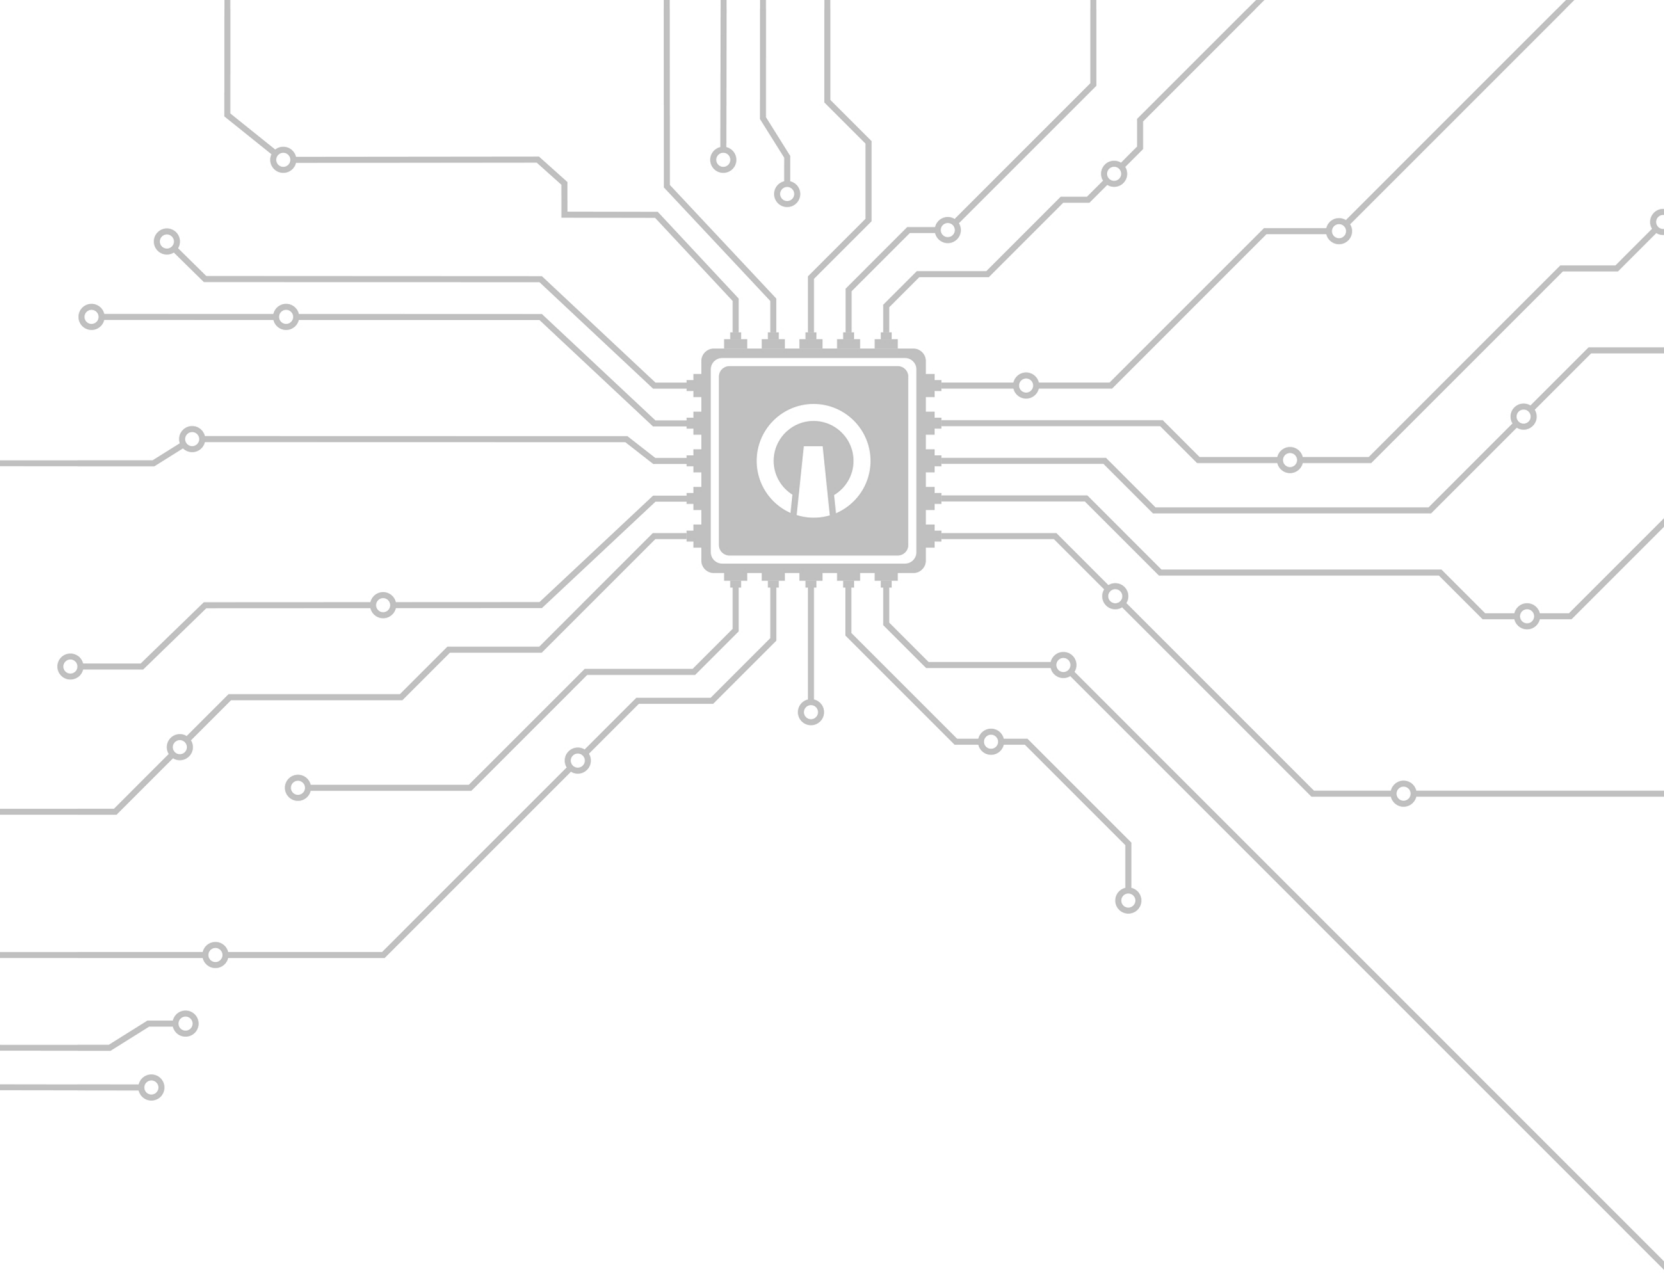

InterElcom Sp. z o.o.

NIP: 898218586 Regon: 021451864

T: +48 71 780 78 36 | T: +48 71 780 78 37

www.interelcom.com | info@interelcom.com