




Pin	Pin Name
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

- NOTES:
- 1.LCD Display Type: 262K TFT, TRANSMISSIVE;
 - 2.Backlight:9-chips LED, VLED=27.0V, ILED=20mA;
 - 3.LCD View Direction:any angle;
 - 4.Cover attachment method:Double adhesive bonding;
 - 5.Cover : Asahi Glass, 6H;
 - 6.Driver IC:NV3047(LCD) ;GT911 (CTP) ;
 - 7.Operating temperature:-20℃~+70℃;
 - 8.Storage temperature:-30℃~+80℃;
 - 9.General Tolerance:±0.3;
 - 10.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

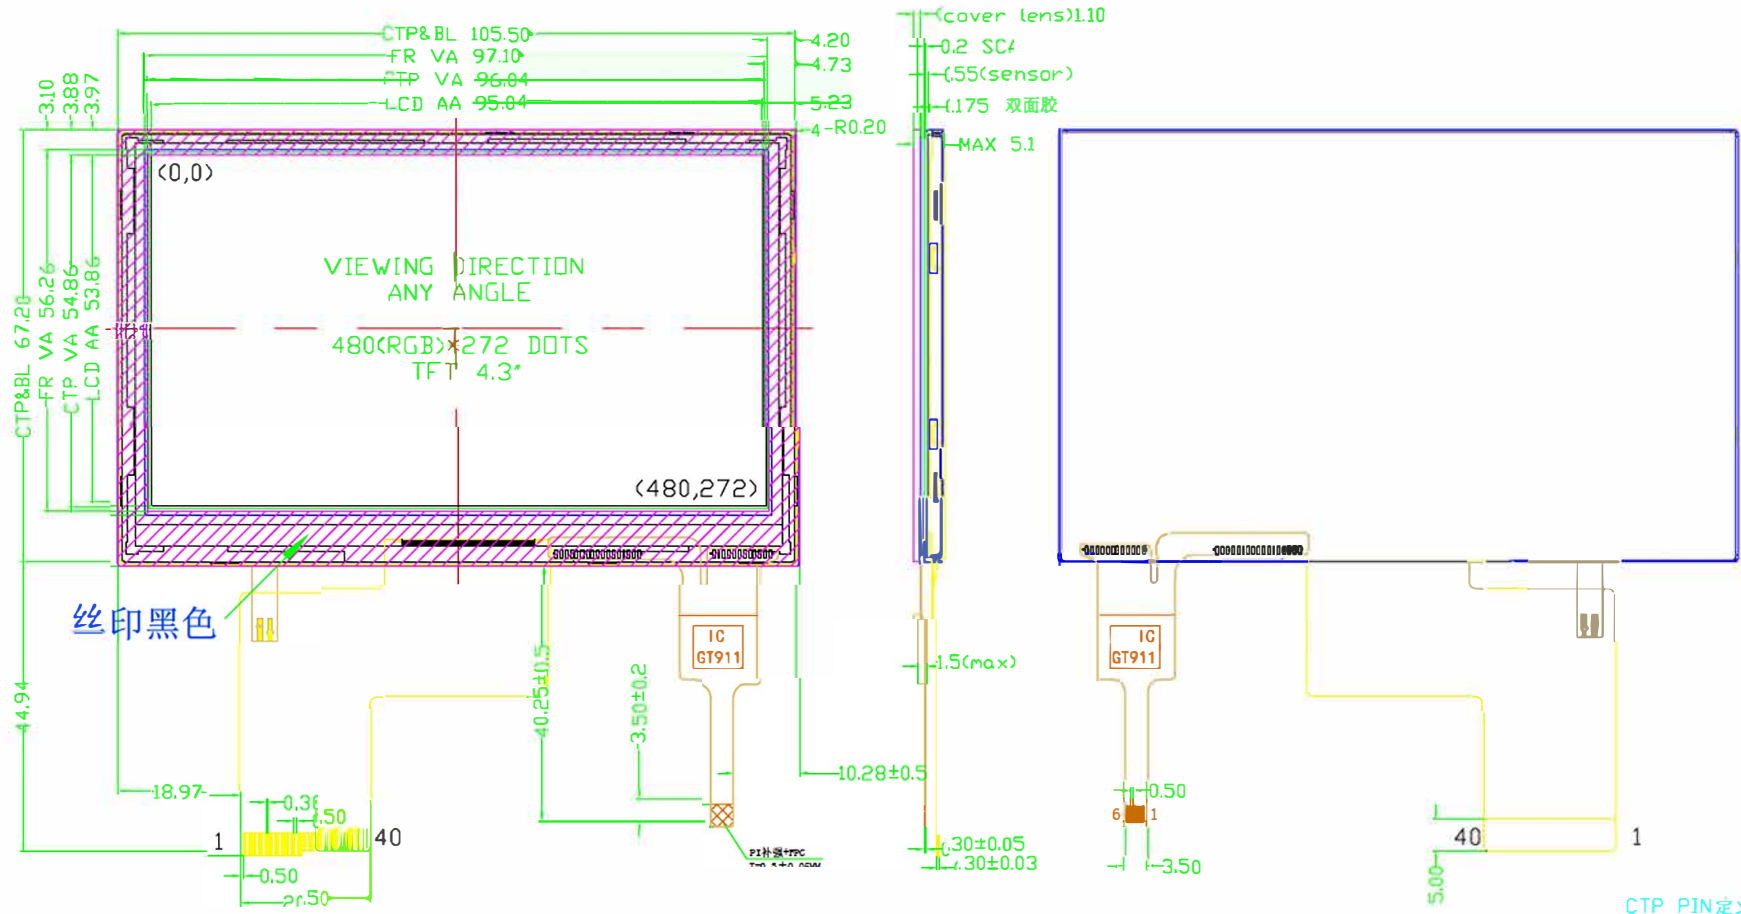

CIRCUIT DIAGRAM

CTP PIN定义

1	RST
2	VDD
3	GND
4	INT
5	SCL
6	SDA

IE-SN-1110CH05R24-C0-1					
DRAWN BY:		2025.06.01			
CHECK BY:					SCALE: 1:1
APPROVER:			UNIT: mm	TOLERANCE: ±0.2	PAGE: 1 of 1