




CIRCUIT DIAGRAM (LED 10*1=10 dies)

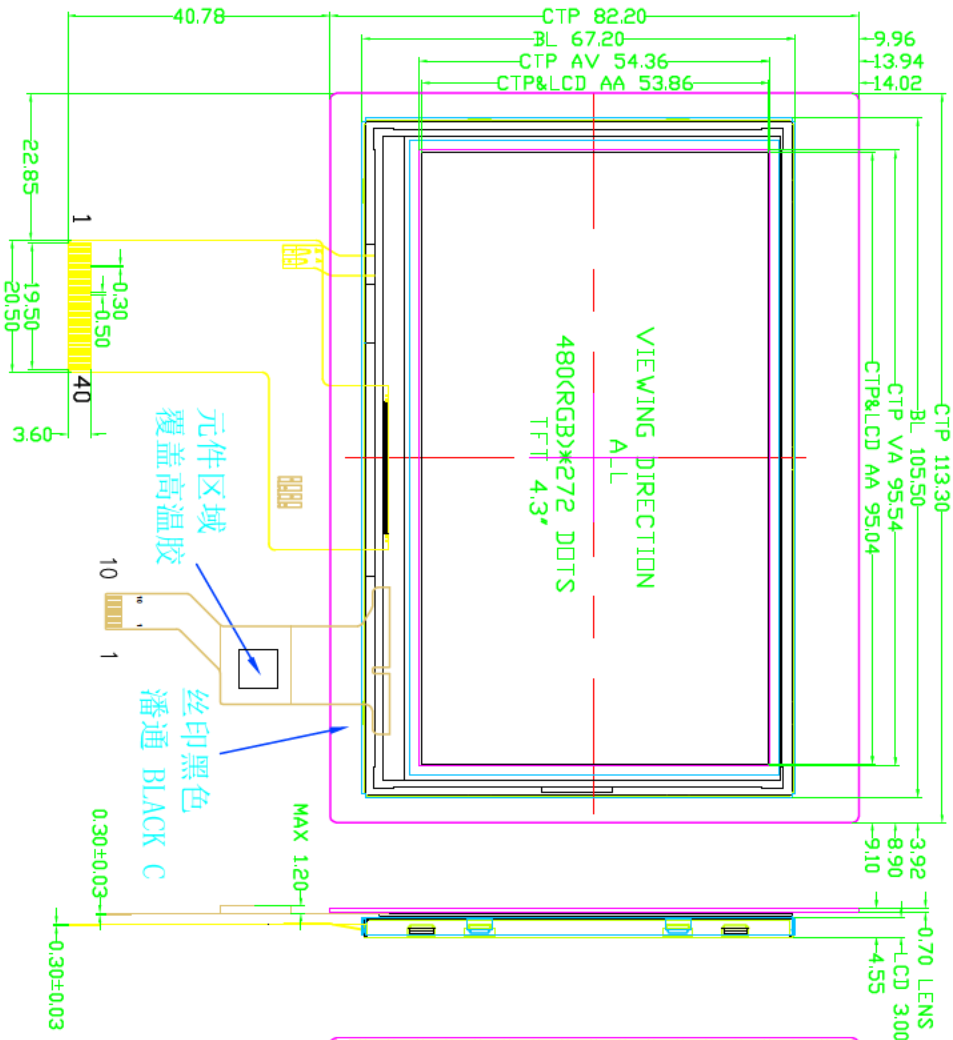

CTP:

Pin	Pin Name	Pin	Pin Name
1	GND	31	DCLK
2	VDD	32	DISP
3	SCL	33	HSYNC
4	SDA	34	VHYN
5	NC	35	DEN
6	NC	36	AVDDNC
7	RST	37	GND
8	NC	38	XR(NC)
9	INT	39	YD(NC)
10	GND	40	XL(NC)

技术参数:

1. IC型号: **GT911**, 工作电压: 2.8V~3.3 V;
2. I2C通讯电压: 2.8V~3.3 V
3. 透光率: ≥85%
4. 结构: **G+G**, 表面硬度: 6H
5. 工作环境: -30℃~+80℃, ≤90%RH
6. 储存环境: -30℃~+80℃, ≤90%RH
7. 未注尺寸公差按±0.2mm
8. 符合ROHS环保要求。

Specification:

1. Viewing angle :ALL
3. Display mode: TFT/TRANSMISSIVE
4. Operating temp.: -20℃-70℃
5. Storage temp.: -30℃-80℃
6. IC: NV3047 or compatible
7. Backlight: side, 10 PCS white DIES, VLED=30.0V, ILED=20MA
8. All the raw materials are RoHS compliant

IE-SN-1110CH03R24-CBCM-1

2025.02.28

DRAWN BY:

CHECK BY:

APPROVER:

SCALE: 1:1

MATERIAL:

UNIT: mm

TOLERANCE: ±0.2

PAGE: 1 of 1

