

4.8mm Helmet Type LED Lamps

M O D E L N O : IE-5B4UT-D7

★Features:

- Low power consumption;
- High efficiency and high performance;
- Choice of various viewing angles;
- Reliable and robust.

★Lens Color :

- Color Diffused Color Transparent
 Water Clear White Diffused

★Descriptions :

- The series is specially designed for applications requiring higher brightness.
- The led lamps are available with different Colors, intensities, epoxy colors, etc.

★Applications :

- Indicators ● Home electric appliance
- Automotive ● Sign & Signal.


★Absolute Maximum Ratings (Ta=25°C) :

Parameter	Symbol	Rating	Unit	Remark
Forward Current	I _F	30	mA	—
Peak Forward Current	I _{FP}	100	mA	1/10 Duty Cycle
Reverse Voltage	V _R	5	V	—
Operating Temperature	T _{OPR}	-25 ~+85	°C	—
Storage Temperature	T _{Stg}	-40 ~+100	°C	—
Soldering Temperature	T _{So1}	260	°C	≤3 seconds
Power Dissipation	P _d	80	mW	—

★Electronic Optical Characteristics (Ta=25°C) :

Part Number	Emitting Color	V _F (V)			I _{V(mcd)}		I _r (μA) VR=5V	λ _d (nm)	Δλ(nm)	Viewing Angle 2θ _{1/2} (°)
		I _F =20mA			I _F =20mA					
		Min	Typ	Max	Typ	Max				
IE-5B4UT-D7	BLUE	2.8	3.0	3.6	500	1270	<10	464-474	25	100°

★Package Dimension :

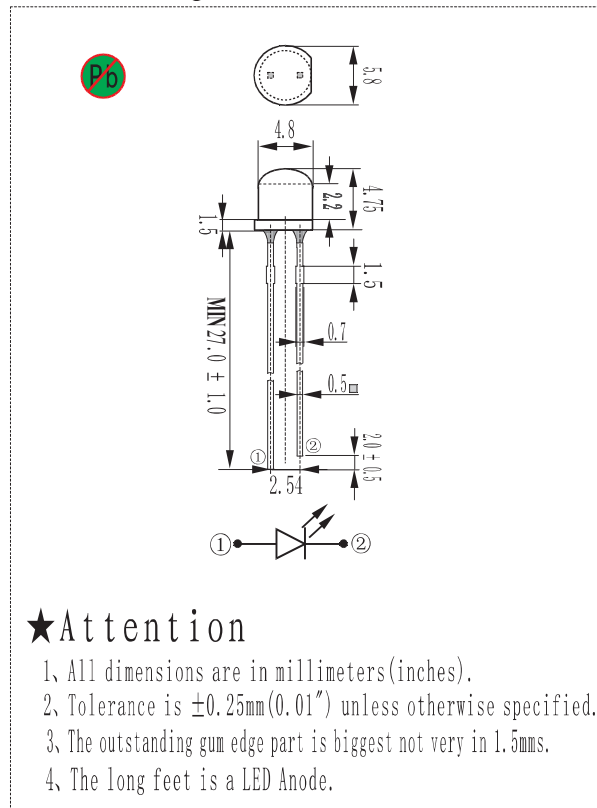

★Attention

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise specified.
3. The outstanding gum edge part is biggest not very in 1.5mms.
4. The long feet is a LED Anode.

★Elucidation: = Pb free Soldering Application, Pb < 1000 ppm (RoHS - Compliant)