



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃





Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 260℃±5℃ 5S

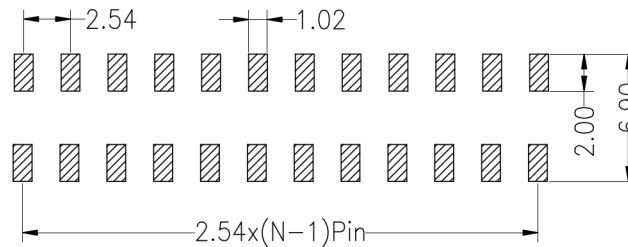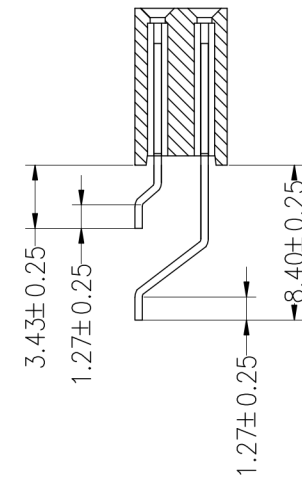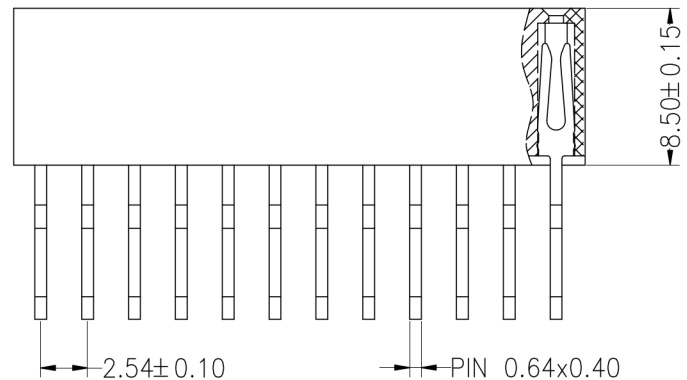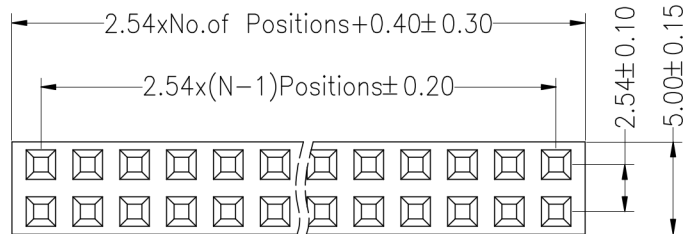

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW			SCALE	FIT		
				X.X	± 0.30				UNIT	mm		
				X.XX	± 0.20	CHECK			SIZE	A4	PART NO.	
A0	2019.01.25	NEW DRAWING		X.XXX	± 0.10				SHEET	1/1		
				Angle	± 3°	APPROVE			PROJ.		TITLE:	in 90° SMT
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM TOL							