

REVISION	Revision note	DATE	NAME





Front

Side

Back

TFT PIN OUT

1	LEDK
2	LEDA
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC/XP
38	NC/YD
39	NC/XL
40	NC/YU

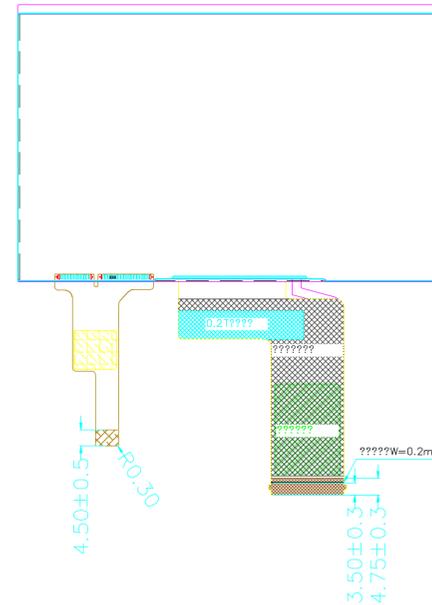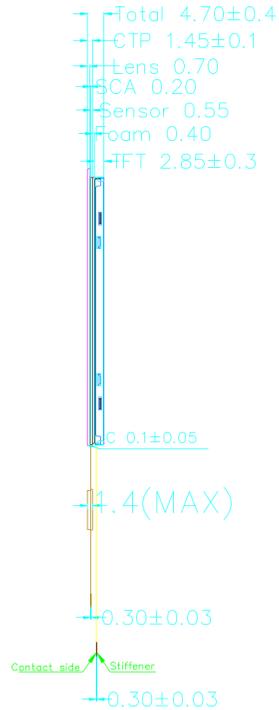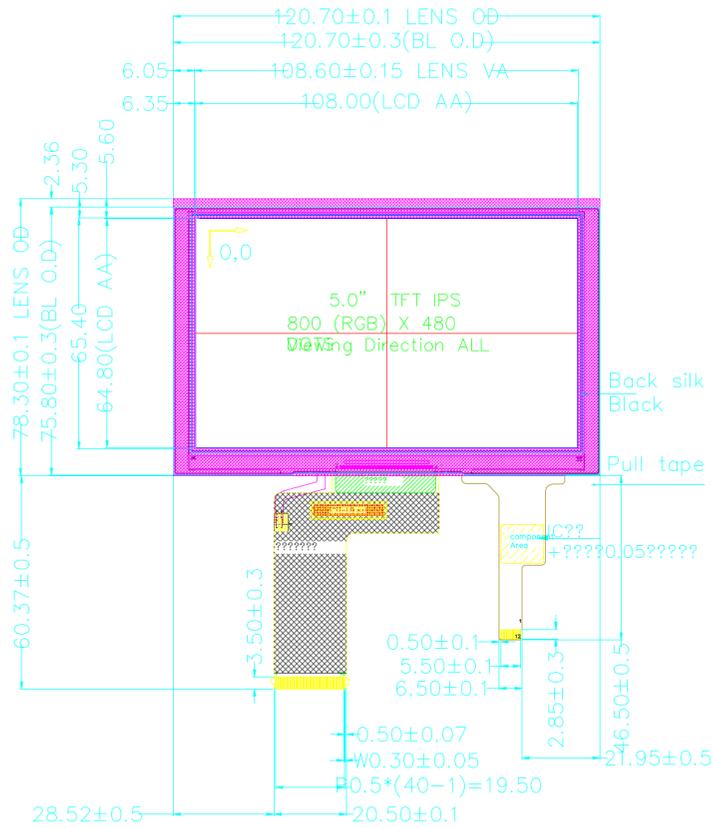

CTP PIN OUT

PIN	SIGNAL
1	GND
2	NC
3	NC
4	NC
5	NC
6	GND
7	SDA
8	SCL
9	RST
10	INT
11	VDD(3.3V)
12	VDD(3.3V)

Approved By

Checked By

Drawn By

UNIT:mm

MZJ



SIZE: TFT_LCD 5.0"

IE-A-1316CHBH07R24-C0-1

CUSTOMER_NO.

CTP Technical parameters:

- 1.Structure: COVER GLASS+ITO GLASS
- 2.IC: GT911,RX14*TX22
- 3.VDD voltage : 2.8V~3.3V
- 4.Surface hardness??6H

TFT Technical parameters?

- 1.5.0" TFT,NORMALLY BLACK
- 2.VIEWING DIRECTION : ALL

Notes:

- 1.CTP+LCM Air bonding
- 2.Top : -20°C ~ 70°C, Tst : -30°C ~ 80°C
- 3.GENERAL TOLERANCE: +-0.2
- 4.Luminance: LED/500cd/m (Typical)
- 5.ROHS compliance