

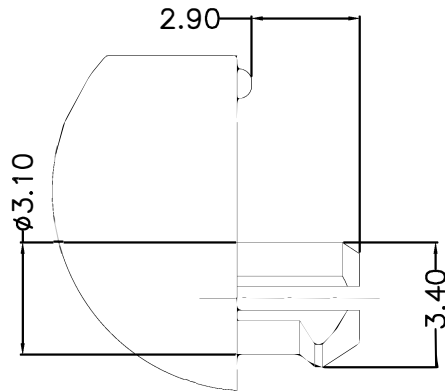
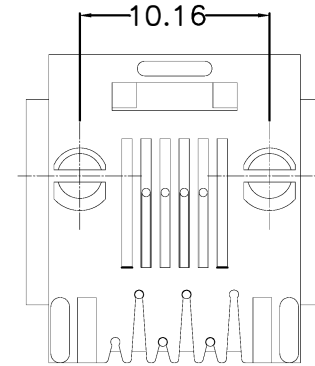
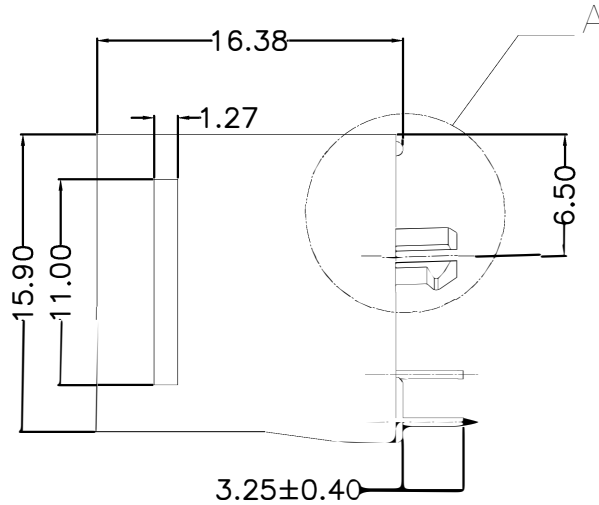


REV.	NOTES	DATE
A	RELEASED	2024/05/06

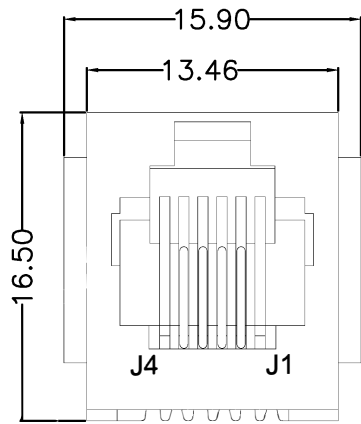

A(2:1)

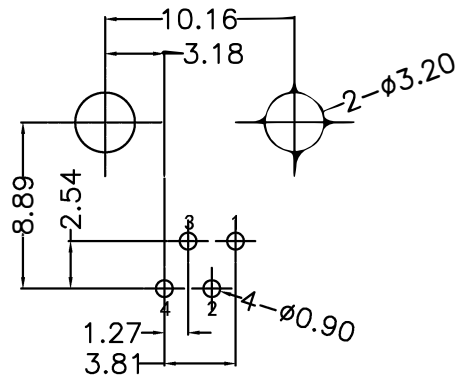

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:

HOUSING: PBT,UL94V-0,GRAY.

TERMINAL: PHOSPHOR BRONZE $\phi=0.46\text{MM}$, G/F GOLD PLATING.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: -40℃~+85℃.

STORAGE TEMPERATURE: -40℃~+85℃.

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL


AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.

PCB SIDE TO PHY

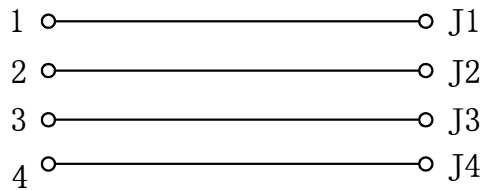

CABLE SIDE

IE-YF-RJ11-64-V5

RJ11 1*1 6P4C ROHS

料號(PART NUMBER)

圖號(DRAW NUMBER)

比例
(SCALE)

1/1

圖紙
(SIZE)

A4

頁次
(SHEET)

1/1

版次
(REV.)

A

DIMENSIONS	單位(UNITS)	mm
TOLERANCE	繪圖(DRAW)	
METRIC	設計(DE'N)	
X : ±0.38	核准(APP'D)	
X.X : ±0.30		
X.XX : ±0.25		
ANGLES		
X : ±1°		
X.X : ±0.5°		