



PRODUCT DATA SHEET


BASIC DIMENSIONS:

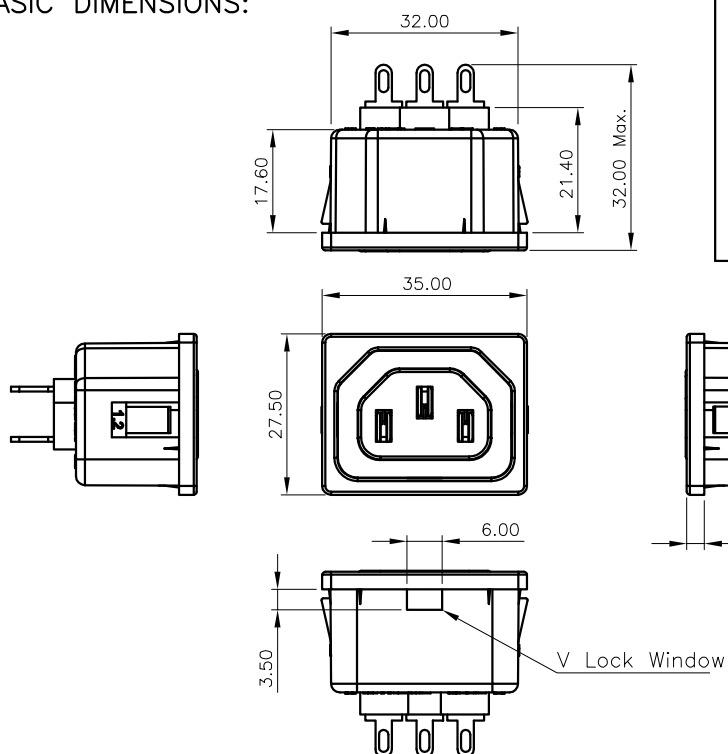


PANEL CUTOUT



TERMINALS 2.8x0.8 (T2)



PCB DETAILS :-




SPECIFICATION TABLE:

SR.NO.	PARAMETER		SPECIFICATIONS
1	V/A Rating		10A 250V AC (VDE), 15A 250V AC (UL, C,US)
2	Contact resistance (Initial)		10 mohms max.
3	Insulation resistance at 500 V DC		1000 Mohms min.
4	H.V.Break down test (For 1minute)		2 KV AC
5	Panel thickness		1.2 mm
6	Mounting		Panel, Snap-in type
7	Terminals		Soldering Or Fast-On 2.8x0.8
8	Permissible temp.	(a)With/Without load	0 To 65°C
		(b)For Soldering	270°C for 5 Sec. max.
9	Material	(a)Body, Flame retardant	Nylon-6, GF20%, V-2
		(b)Contacts, Terminals	Brass, Tin plating
10	Reference standards		IEC 60320-1, UL-498, CSA : C22.2 No. 182.3
11	Approvals		

ORDERING TABLE:

SR.NO.	TYPE	CODE
01	Single C13 W/Solder Tabs Black	EMO-11-BT2-1V2
02	Single C13 W/Solder Tabs Grey	EMO-11-BT2-1V2-01
03	Single C13 W/Solder Tabs White	EMO-11-BT2-1V2-10

R5	Specs. Updates		17.12.14	PPD	GJG	PRODUCT : MAINS OUTLET			CODE :									
R4	32.00 MAX.	31.50 MAX.	15.06.14		GJG	(WITH V-LOCK)			EMO-11-BT2-1V2									
R3	Ordering Table Added.		28.01.14		GJG	APP	05.03.13	PBM	 ELCOM HOUSE M.B.LOHIA MARG 413/1/1-A, GANDHINAGAR KOLHAPUR-416 119									
R2	Snap positions changed.		29.12.13		GJG	CHK	05.03.13	PGP										
R1	31.50 MAX.	31.00 MAX.	06.04.13		GJG	DRN	05.03.13	Vinayak										
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN	Elcom International Pvt. Ltd.									
UNSP.TOLERANCE		DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION	SHEET	DRAWING NUMBER								
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	P	E	M	O	9	1	1	V	REVISION
UP TO	1	10	-	Moulding, plating details as per Bill of Material							R5							
±	0.2	0.3	0.5	Unspecified colour is Black, GF:Glass filled.														