

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C





Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

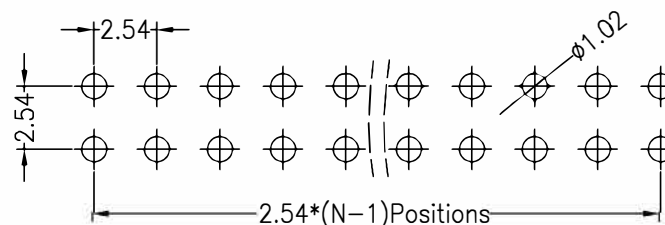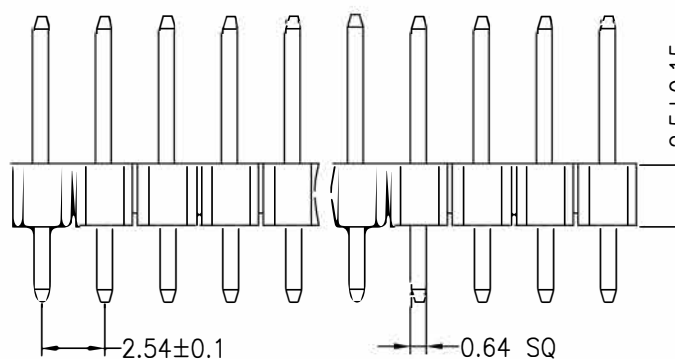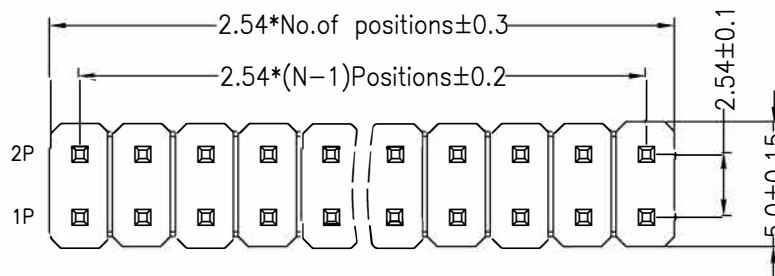

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	11.50

				OPERATION		DRAW		20.11.24	SCALE	FIT		
				X.X	±0.30					UNIT		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	IE-JL-1225-PH-DV-0x-CG0SN115-0
				X.XXX	±0.10				SHEET	1/1		
AO	2020.11.24	NEW DRAWING		Angle	±3°	APPROVE				1/1	TITLE:	2.54PH H2.5mm Dual Row 180°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				PROJ.			