




cable gland

OVERALL SOLUTION EXPERT

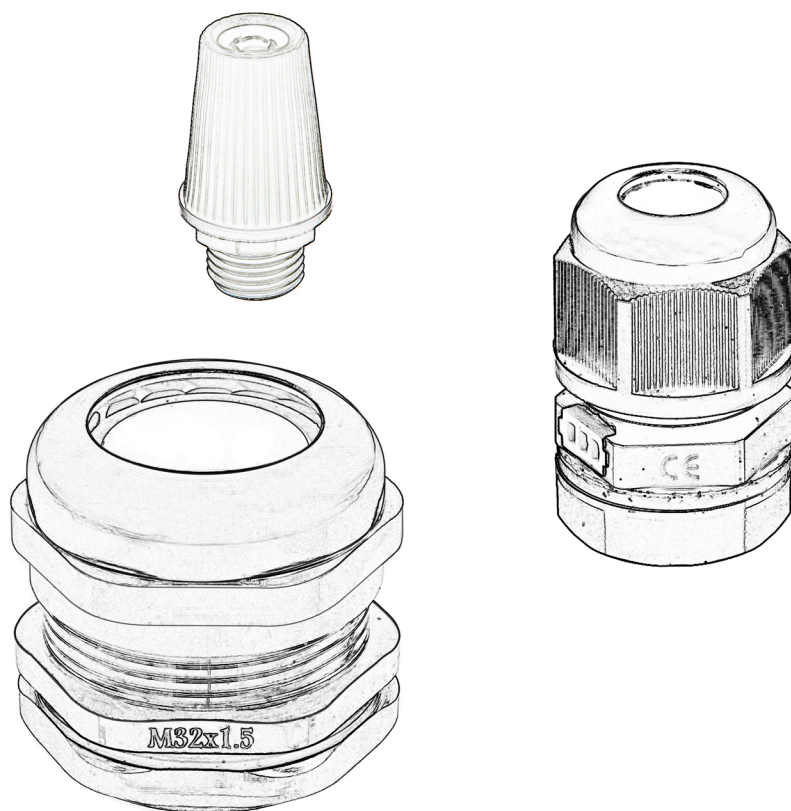

Stainless Steel Waterproof Cable Gland Metric Type

- **Thread:** Metric
- **Materials:** Stainless Steel ACF
part E is made of UL approved nylon PA66 (fire rating UL94V-2), part B,D butadiene rubber (NBR) or EPDM
- **Protection Degree:** IP68 (within fastening range, 0 type was her will be used in tightening part)
- **Working Temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃
- **Product Features:** Wide range for fastening cables, strong tensile strength, waterproof, dustproof, resistant to a acid and alkali, alcohol, grease and general solvents

Model	Cable Range (mm)	Thread O. D. AG (mm)	Thread Length GL (mm)	Spanner Size (mm) 
M12X1.5	3-6.5	12	6	14
M16X1.5	4-8	16	7	17
M18X1.5	5-10	18	7.5	20
M20X1.5	6-12	20	7.5	22
M22X1.5	10-14	22	7.5	24
M24X1.5	10-15	24	8	26
M25X1.5	12-16	25	8	27
M27X1.5	13-18	27	8	30
M30X1.5	15-20	30	9	33
M32X1.5	16-22	32	9	35
M36X1.5	18-25	36	9	40
M40X1.5	22-30	40	9	45
M50X1.5	32-38	50	10	57
M63X1.5	37-44	63	11	68

F
Sealing Nut




D
Seal



E
Claw



C
Body




B
Washer



A
Lock Nut



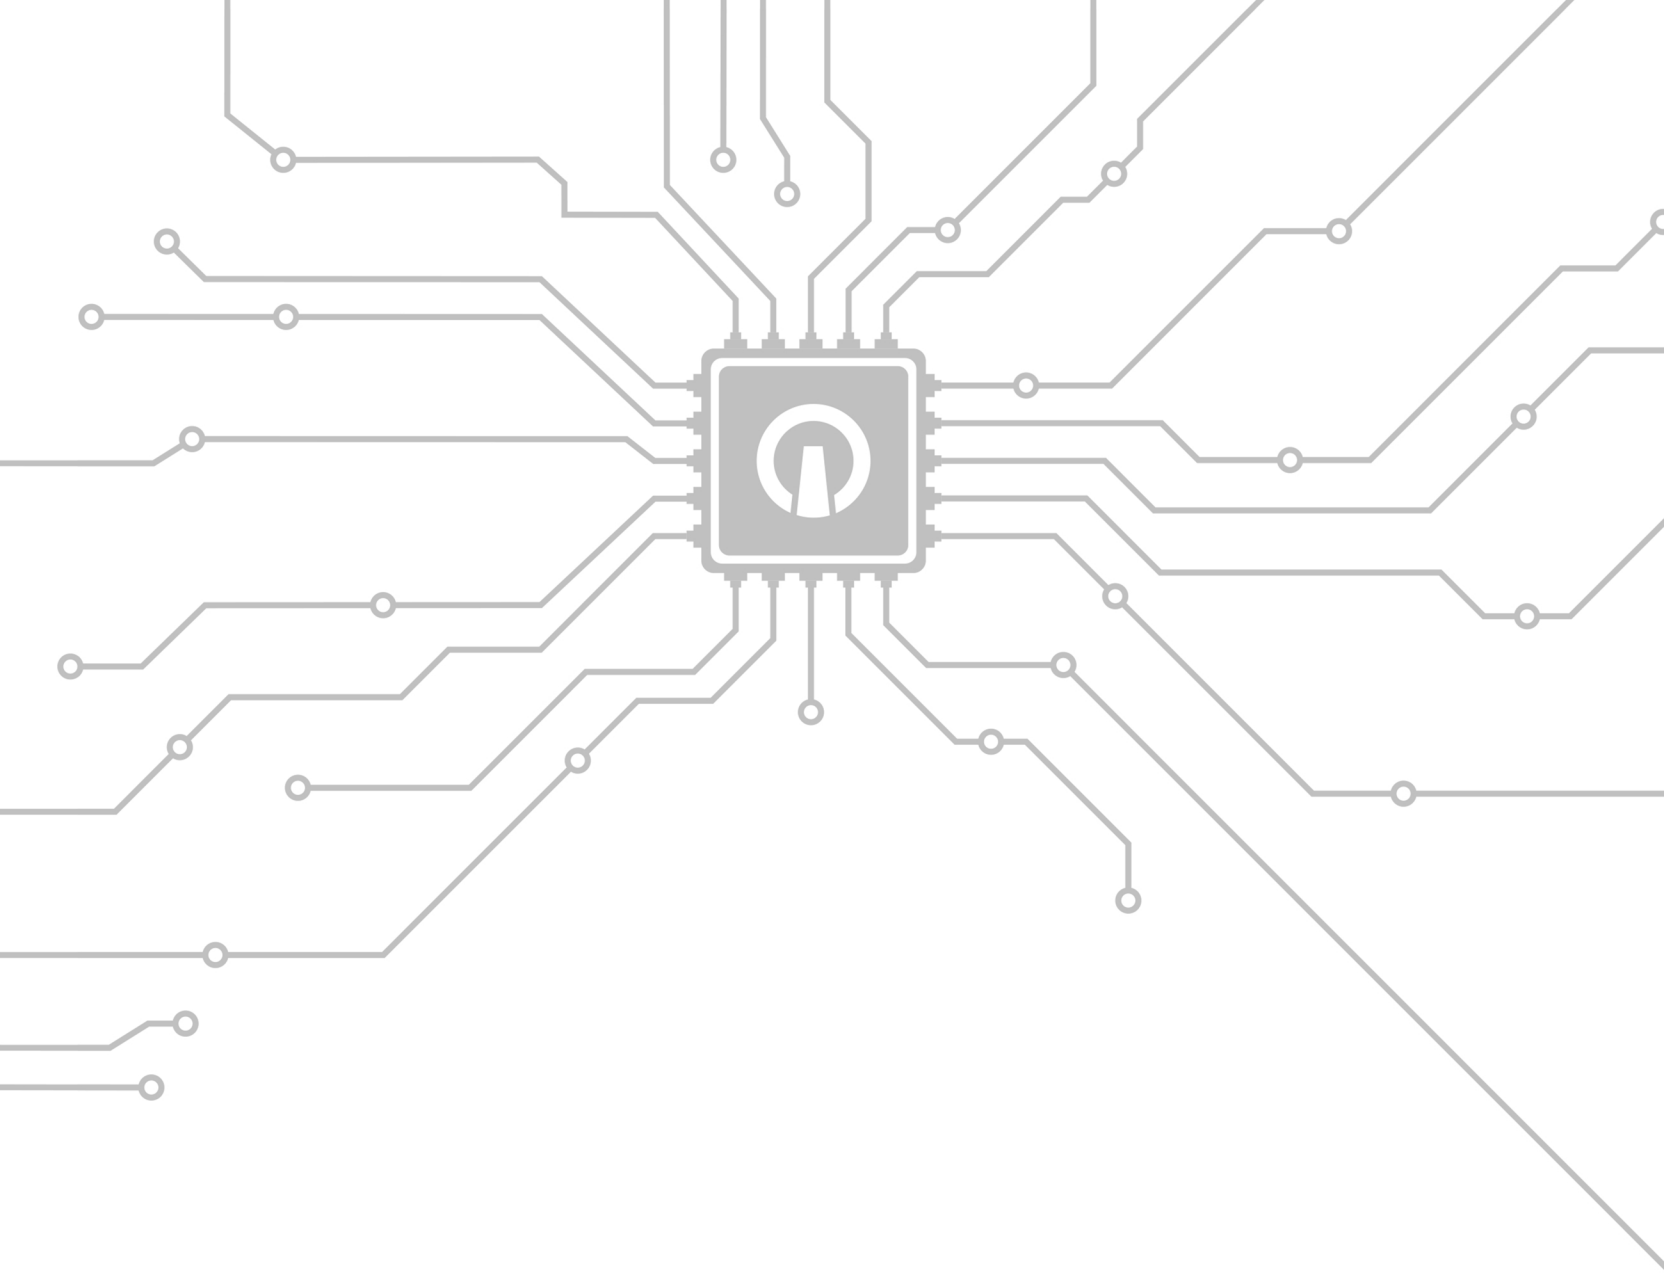

InterElcom Sp. z o.o.

NIP: 898218586 Regon: 021451864

T: +48 71 780 78 36 | T: +48 71 780 78 37

www.interelcom.com | info@interelcom.com