
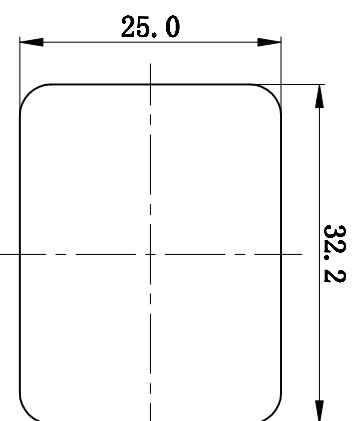
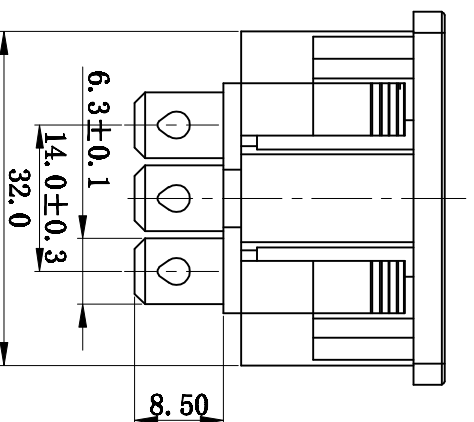
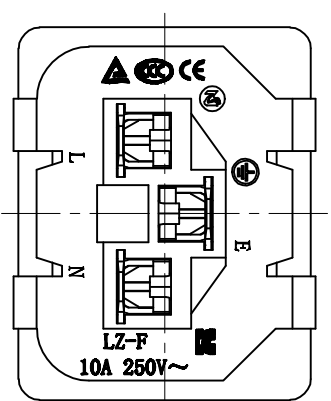
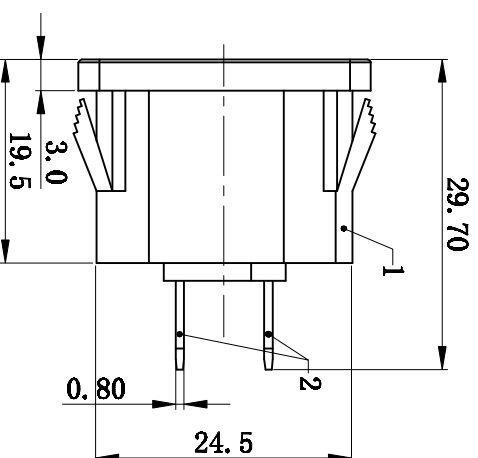


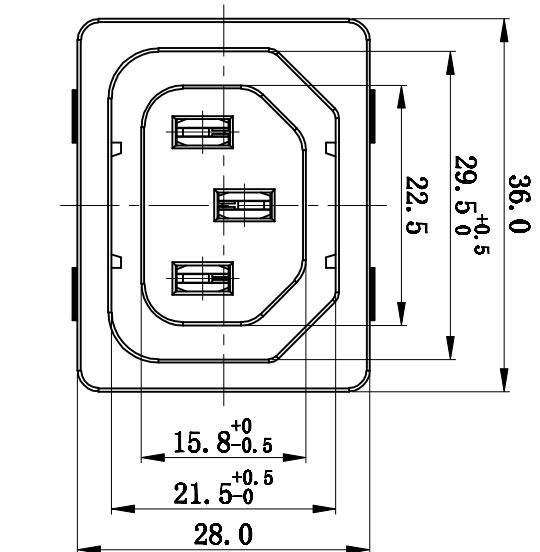

PANEL CUT-OUT

No.	Name	Material	Qty
1	Base	PA66	1
2	terminal	Brass t0.8	3

Standard:

1. IEC 60320-1

2. GB/T 17465.1

Rating : 10A 250V AC 3C KC TUV CE

Insert And Extract Force: 1.36kgf~6.8kgf

Operating Life: ≥5000 cycles

Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min

terminals to Base:3750V AC (50-60Hz) 1min

Leakage Current : 1mA

Insulation Resistance: ≥100MΩ 500V DC

Glow-wire temp: 750℃



YUEQING LANZ Electronics Co., Ltd

A4			COMMON TOLERANCE :							
A3			UP TO 5	±0.20	UNIT	mm	PROJECTED	⌀	PRODUCT NAME	Ac Outlet
A2			ABOVE 5 TO 30	±0.30	DRAWN BY	WU YU	CHECKED BY		MODEL NO.	LZ-F-2B
A1			ABOVE 30	±0.50	DATE	2021.5.11	APPROVAL BY		DWG NO.	LANZ/CRS-LZF2B
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°					