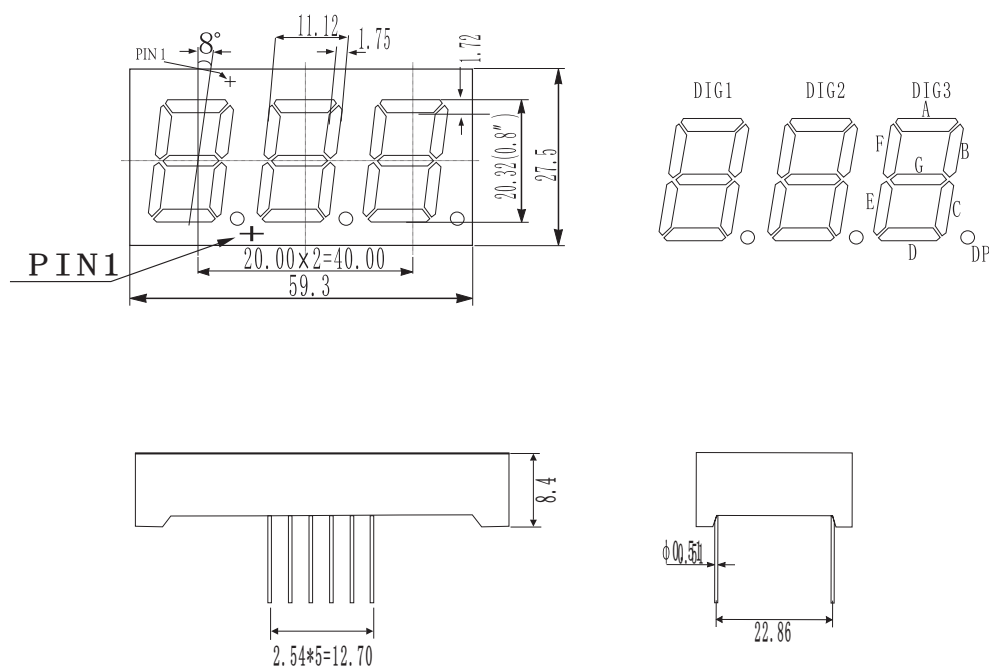


0.8" 3-Digit LED Display

Model NO. : IE-3R-10802NC-B

Chip (Ta=±25℃)		PIN	Drive Mode	Face Color	Epoxy Color
Quantity	Emitting color	—	Common Anode	Black	White
24ea	Red				


■ Package Outlines

$$(\text{unit}:\text{mm})$$


Notes:

1. All dimensions are in millimeters (inches);
2. Tolerances is ± 0.25 (0.01") unless otherwise noted.

■ Internal Circuit:

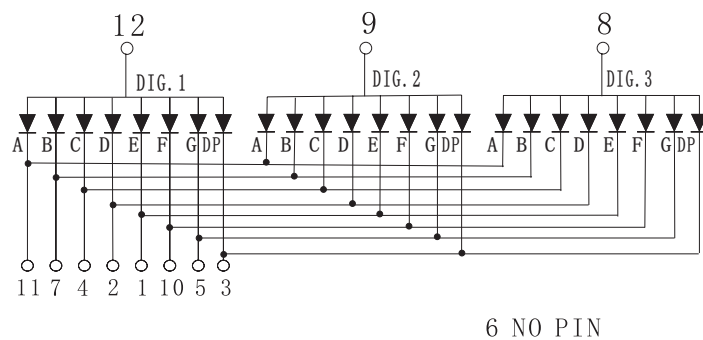

6 NO PIN

0.8" 3-Digit LED Display

Model NO. : IE-3R-10802NC-B

■ Absolute Maximum Ratings (Ta=+25℃)

Characteristics	Symbol	Rating	Unit	Remarks
Forward current/segment	I_F	30	mA	——
Peak forward current/segment	$I_{F(Peak)}$	100	mA	1/10 Duty Cycle
Reverse Voltage/segment	V_R	5	V	——
Operating Temperature	T_{Opr}	-25~+80	℃	——
Storage Temperature	T_{Stg}	-40~+85	℃	——
Solder Temperature	T_{Sol}	260	℃	≤5 seconds
Power Dissipation/segment	P_d	65	mw	——

■ Electro-Optical Characteristics (Ta=25℃) :

Parameter	Symbol	Test condition	Min.	Typ.	Max.	Unit
Forward Voltage/segment	V_F	$I_F=20mA$	1.65	2.0	2.4	V
Dominant Wavelength	λ_d	$I_F=20mA$	620	——	630	nm
Spectrum width (Half value)	$\Delta\lambda$	$I_F=20mA$	——	25	——	nm
Luminous Intensity/segment	I_V	$I_F=20mA$	——	80	——	mcd
Reverse current/segment	I_R	$V_R=5V$	——	——	10	μA