
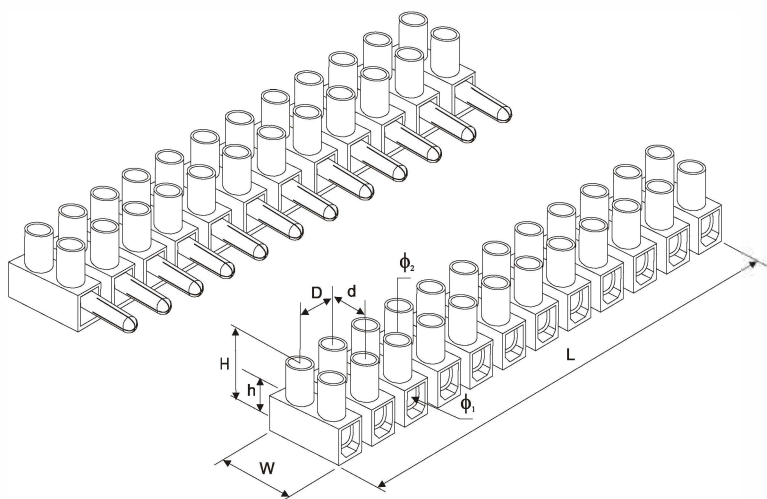


POLYAMINDE TERMINAL BLOCKS

IE-xxHP RANGE
WITH HORIZONTAL PLUG

SPECIFICATIONS

INSERTS: NICKEL PLATED BRASS
HOUSING: POLYAMIDE (PA66)
TEMP.: 105°C
SCREWS: GALVANISED STEEL
STANDARD: VDE
COLOUR: NATURAL, WHITE OR BLACK
FEATURE: SEMI-RIGID
 HIGH TEMPERATURE
 FLAME RETARDANT
 ALL SCREWS ARE CAPTIVE
 & RAISED FOR EASY WIRING

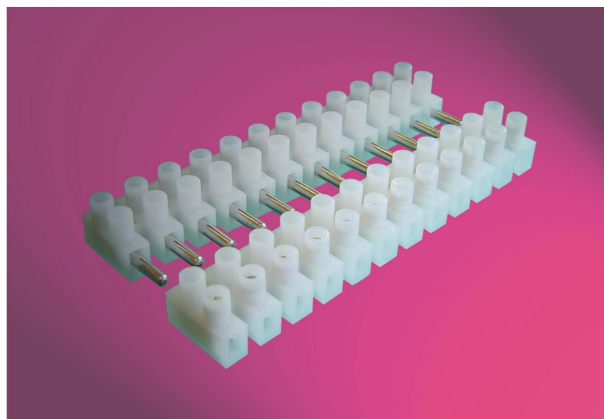

EASE CODE	CROSS SECTION	RATED CURRENT	RATED VOLTAGE	DIMENSIONS (mm)							
				W	L	Φ ₁	Φ ₂	D	d	H	h
IE-xxHP-2.5-ES	2.5mm ²	2.5~20A	450V	18	94	2.8	2.5	7.2	5.6	13	7
IE-xxHP-4-ES	4mm ²	3~24A	450V	20	115	3.5	3.2	10	8	15	8
IE-xxHP-6-ES	6mm ²	5~32A	450V	24	138	4.2	3.5	12	9.5	19	10
IE-xxHP-10-ES	10mm ²	10~57A	450V	26	156	5.0	4.2	14	11	25	15

Cross Section: rated for rigid wires and cables (if for flexible wires, it should be reduced one-size, i.e. 6 mm² to 4 mm²)

Φ₁ wire entry hole diameter

Φ₂ fixing hole diameter.