
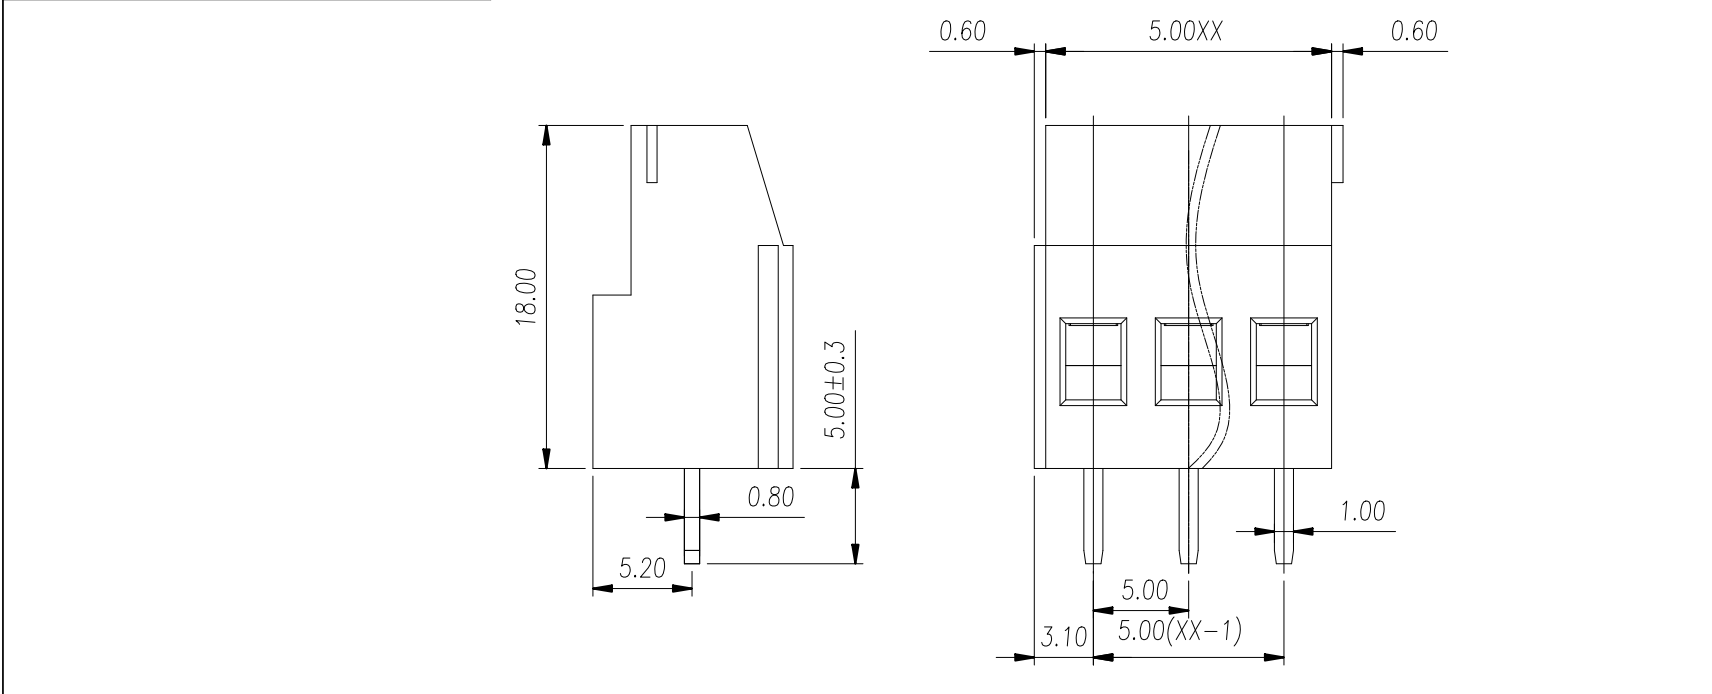


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

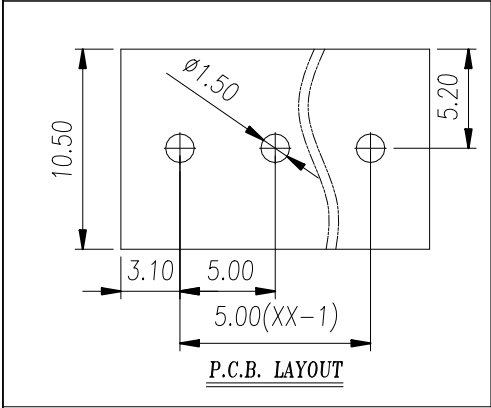

UL/CUL 技术参数		UL/CUL Technical Data			UL [®] CUL [®] US		
等级	Use Group		B	C	D		
额定电压	Rated Voltage	[V]	300	-	300		
额定电流	Rated Current	[A]	20	-	10		
接线范围	Wire Range		26-12				
单/多芯线	Solid/Stranded	[AWG]					
耐电压	Withstanding Voltage		1600V/1Min				
IEC 技术参数		IEC Technical Data			IEC		
过电压类别	Overvoltage Category		III	III	II		
污染等级	Contamination Class		3	2	2		
额定电压	Rated Voltage	[V]	250	400	630		
额定电流	Rated Current	[A]	24	24	24		
额定冲击电压	Impulse withstand voltage	[KV]	4.0	4.0	4.0		
导线截面积	Conductor cross section		0.5-2.5				
硬质/柔性导线	Solid/flexible	[mm ²]					
材料	Material						
绝缘材料	Insulation Material		PA66				
阻燃等级	Imflammability		UL94V-0				
导体材料	Contacting Material		铜合金 Copper alloy				
导体表面镀层	Contactive Coating		镀锡 Sn Plated				
一般参数		Other Data					
间距	Pitch / 极数 Poles	[mm] / [P]	5.0 / 02~24				
剥线长度	Stripping Length	[mm]	6~7				
螺丝	Screw/ 扭矩 Torque(Max)	[N.m]	M3/0.5				
工作温度	Operating temperature	[°C]	-40~105				
焊锡温度	Soldering temperature		260°C/5S				
引脚尺寸	Pin Dimensions	[mm]	0.8*1.0				
PCB板孔径	PCB Hole Diameter	[mm]	Ø1.5				

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	5:2	第三角投影	版 / REV	V0
						名称 / TITLE	WJ129-5.0-XXP-1YY-00A	