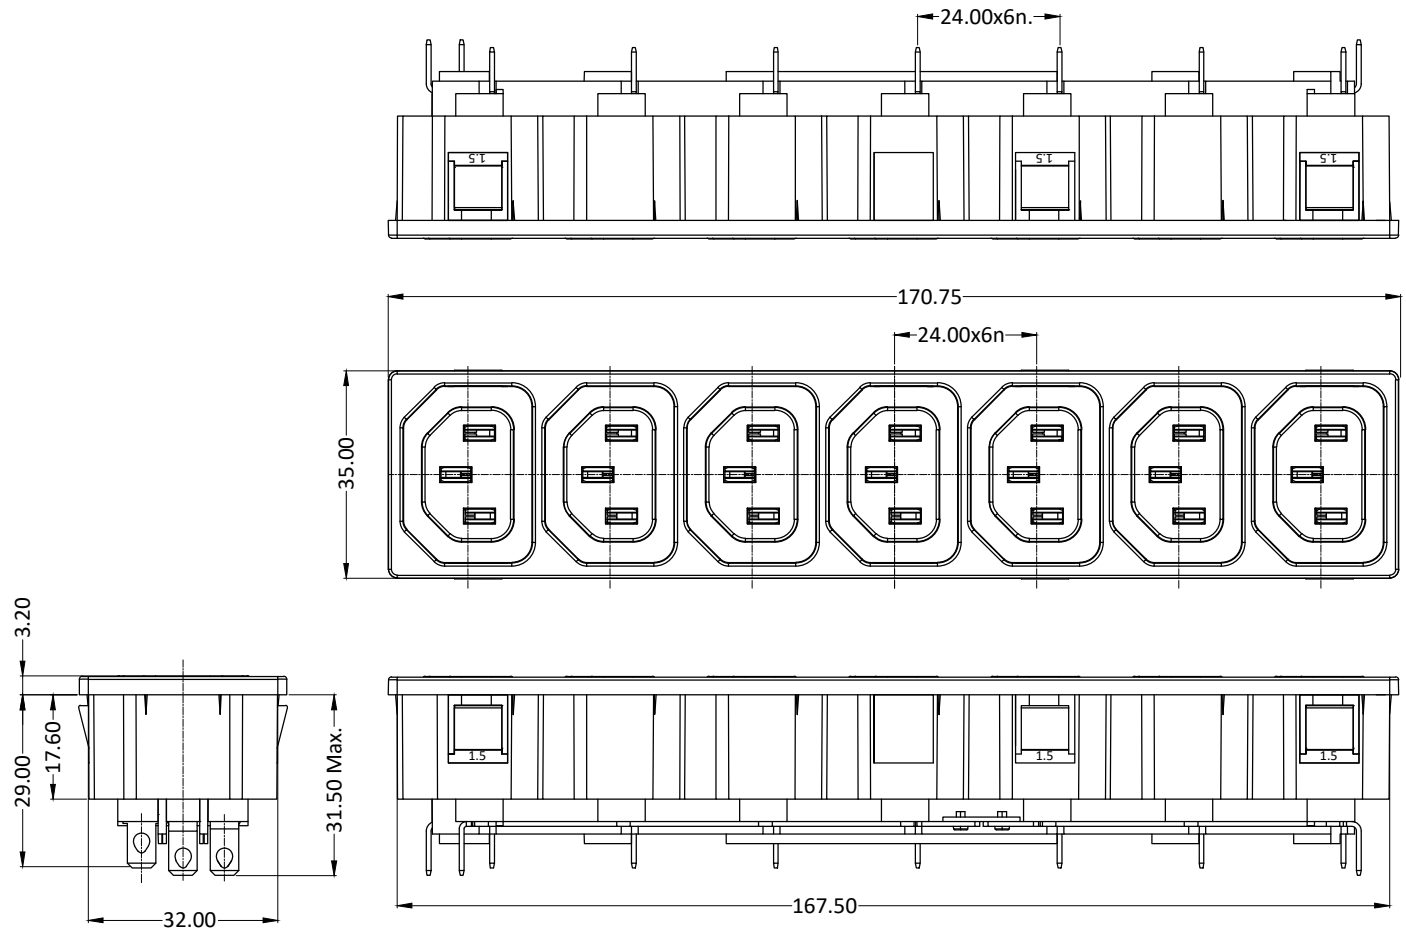
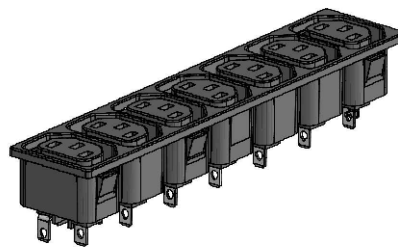
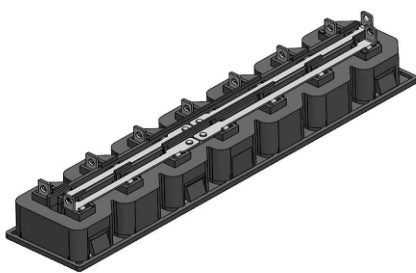
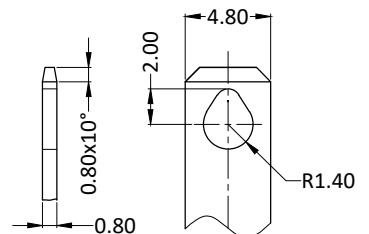



BASIC DIMENSIONS

PRODUCT IMAGE
(For Reference only)TERMINAL DETAILS-
Straight (4.8x0.8)

						PRODUCT : MAINS OUTLET				CODE : EMO-17-T4B-7V2													
						APP	02.04.2021	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com														
						CHK	02.04.2021	KAK															
						DRN	02.04.2021	PPD															
REV	IS		WAS	DATE	SIGN	APP	BY	DATE	SIGN														
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION		SHEET		DRAWING NUMBER									
OVER	-	1	10	mm		Max.		NTS.				1 OF 2		P	E	M	O	2	1	7	X	REVISION	
UP TO	1	10	-	Moulding, plating details as per Bill of Material										DO									
±	0.2	0.3	0.5	Unspecified colour is Black, GF:Glass filled.																			

F:ENG-08.00

Copyright © 2021 by Elcom International Pvt.Ltd, India. All rights reserved

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

PANEL CUTOUT:-



SPECIFICATION TABLE

SR.NO.	PARAMETER		SPECIFICATIONS
1	V/A Rating		10A 250V AC (VDE), 20A 250V AC (UL, C,US)
2	Contact resistance (Initial)		10 mohms max.
3	Insulation resistance at 500 V DC		1000 Mohms min.
4	H.V.Break down test (For 1minute)		2 KV AC
5	Panel thickness (Max.) Other : Available on request *		Standard : 1.5 Other : 1.0(A), 1.2(B)
6	Mounting		Panel, Snap-in type
7	Terminals		Solder-type
8	Withdrawal force		3.5 to 5 kg.
9	Permissible temp.	(a) With/Without load	0 To 70°C (VDE) 0 To 65°C (UL, C,US)
		(b) For Soldering	270°C for 5 Sec. max.
10	Material	(a) Body, Flame retardant	Nylon-6, GF20%, V-2
		(b) Contacts, Terminals	Brass, Tin plating
11	Reference standards		IEC 60320-1, IEC 60320-3 UL-498, CSA:C22.2 No.182.3
12	Compliance Marking		
13	Approvals		


ORDERING TABLE

SERIES	PANEL THICKNESS	TERMINAL TYPES	7V2												
EMO-17	<table><tr><td>Standard</td><td>1.5</td></tr><tr><td>A</td><td>1.0</td></tr><tr><td>B</td><td>1.2</td></tr></table>	Standard	1.5	A	1.0	B	1.2	<table><tr><td></td><td></td><td>B (Drop Hole)</td></tr><tr><td>T4</td><td>4.8x0.80</td><td></td></tr></table>			B (Drop Hole)	T4	4.8x0.80		L:-7 Pockets individual E :- One way sorted Straight terminal N:- Two way sorted straight terminal
Standard	1.5														
A	1.0														
B	1.2														
		B (Drop Hole)													
T4	4.8x0.80														

EXAMPLE:-

EMO-17-T4B-7V2

Mains outlet 7 way, with 1.5mm panel thickness, all L terminal individual, E One way sorted Straight terminal & N Two way sorted straight terminal.

						PRODUCT : MAINS OUTLET				CODE : EMO-17-T4B-7V2																	
						APP	02.04.2021	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com																		
						CHK	02.04.2021	KAK																			
						DRN	02.04.2021	PPD																			
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN																			
UNSP.TOLERANCE				DIMNS. IN mm		WT(Gm) Max.		SCALE:- NTS.		PROJECTION		SHEET		DRAWING NUMBER													
OVER	-	1	10									2		OF		2		P	E	M	O	2	1	7	X	REVISION	
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.																				DO			
±	0.2	0.3	0.5																								

F:ENG-08.00

Copyright © 2021 by Elcom International Pvt.Ltd, India. All rights reserved

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com