

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:−40℃ to +105℃





Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V−0)

Standard: PA6T

Max.Processing Temp: 260℃±5℃ 5S

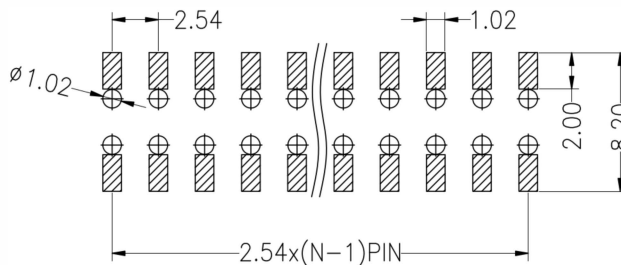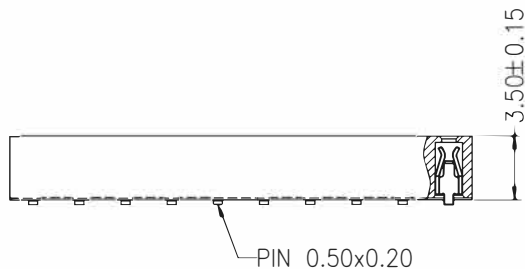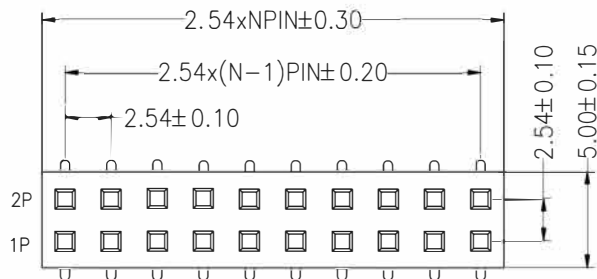

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW				FIT			
				X.X	± 0.30				UNIT	mm			
				X.XX	± 0.20	CHECK				SIZE	A4	PART NO.	
				X.XXX	± 0.10					SHEET	1/1		
AO	2023.01.31	NEW DRAWING		Angle	± 3°	APPROVE				PROJ.		TITLE:	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL								