





cable gland

OVERALL SOLUTION EXPERT

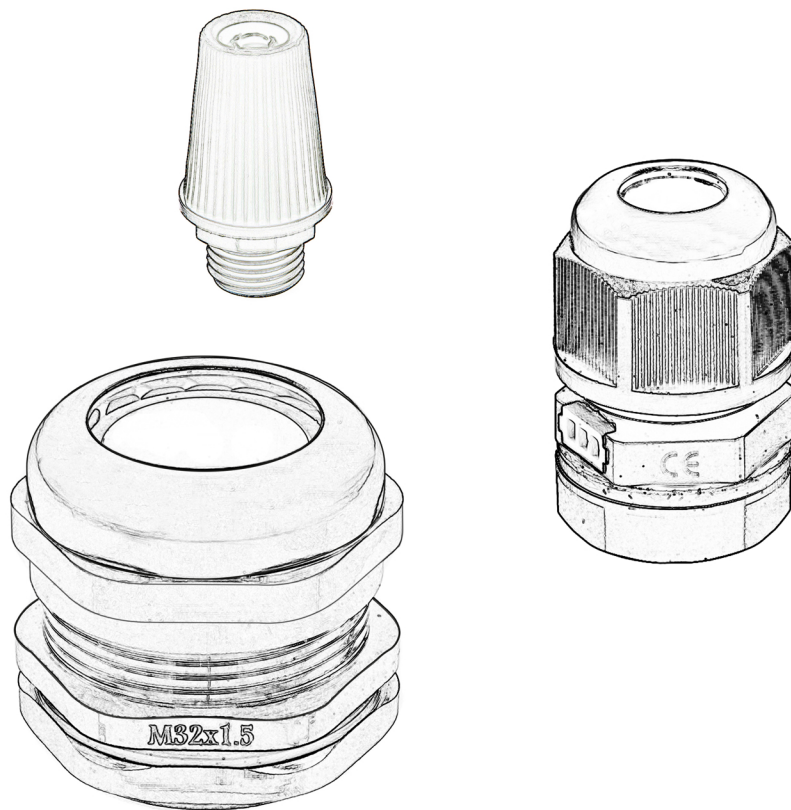


Nylon Waterproof Cable Gland Long Thread Metric Type

- **Thread:** Metric
- **Materials:** Part A.C.F is made of UL approved nylon PA66 (fire rating UL94V-2), part B.D butadiene rubber (NBR) or EPDM
- **Protection Degree:** IP68 (within fastening range, 0 type was her will be used in tightening part)
- **Working Temperature:** -40°C to 100°C in static state, instantaneous heat resistance up to 120°C; -20°C to 80°C in dynamic state, instantaneous heat resistance up to 100°C
- **Product Features:** Wide range for fastening cables, strong tensile strength, waterproof, dustproof, resistant to acid and alkali, alcohol, grease and general solvents
- **Color:** Light grey (RAL7035), black (RAL9005), other color can be customized according to request

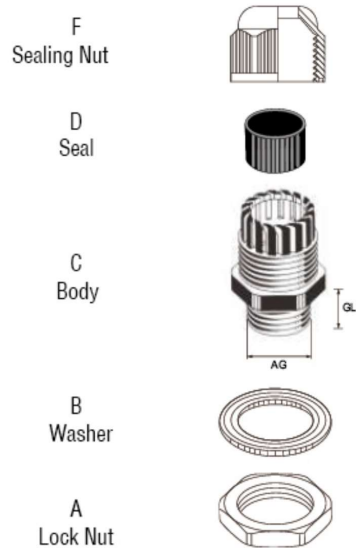

Model	Cable Range (mm)	Thread O. D. AG (mm)	Thread Length GL (mm)	Spanner Size (mm) 
M12X1.5	3-6.5	12	15	18/17
M12X1.5	2-5	12	15	18/17
M12X1.5	4-8	12	15	18/19
M12X1.5	2-6	12	15	18/19
M16X1.5	4-8	16	15	22/19
M16X1.5	2-6	16	15	22/19
M16X1.5	5-10	16	15	22/22
M16X1.5	3-7	16	15	22/22
M18X1.5	5-10	18	15	24/22
M18X1.5	3-7	18	15	24/22
M20X1.5	6-12	20	15	27/24
M20X1.5	5-9	20	15	27/24
M20X1.5	10-14	20	15	27/27
M20X1.5	8-12	20	15	27/27
M22X1.5	10-14	22	15	30/27
M22X1.5	8-12	22	15	30/27
M24X1.5	12-16	24	15	30/27
M24X1.5	10-14	24	15	30/27
M25X1.5	13-18	25	15	33/33
M25X1.5	9-16	25	15	33/33
M27X1.5	13-18	27	15	36/33
M27X1.5	9-16	27	15	36/33
M30X1.5	16-20	30	15	37/36
M30X1.5	13-18	30	15	37/36
M32X1.5	16-20	32	15	40/35
M32X1.5	13-18	32	15	40/35
M32X1.5	18-25	32	16	40/42
M32X1.5	13-20	32	16	40/42
M36X1.5	18-25	36	18	46/42
M36X1.5	13-20	36	18	46/42
M40X1.5	22-32	40	18	50/52
M40X1.5	20-26	40	18	50/52
M50X1.5	32-40	50	18	62/60
M50X1.5	25-31	50	18	62/60
M63X1.5	37-44	63	18	75/68
M63X1.5	29-35	63	18	75/68



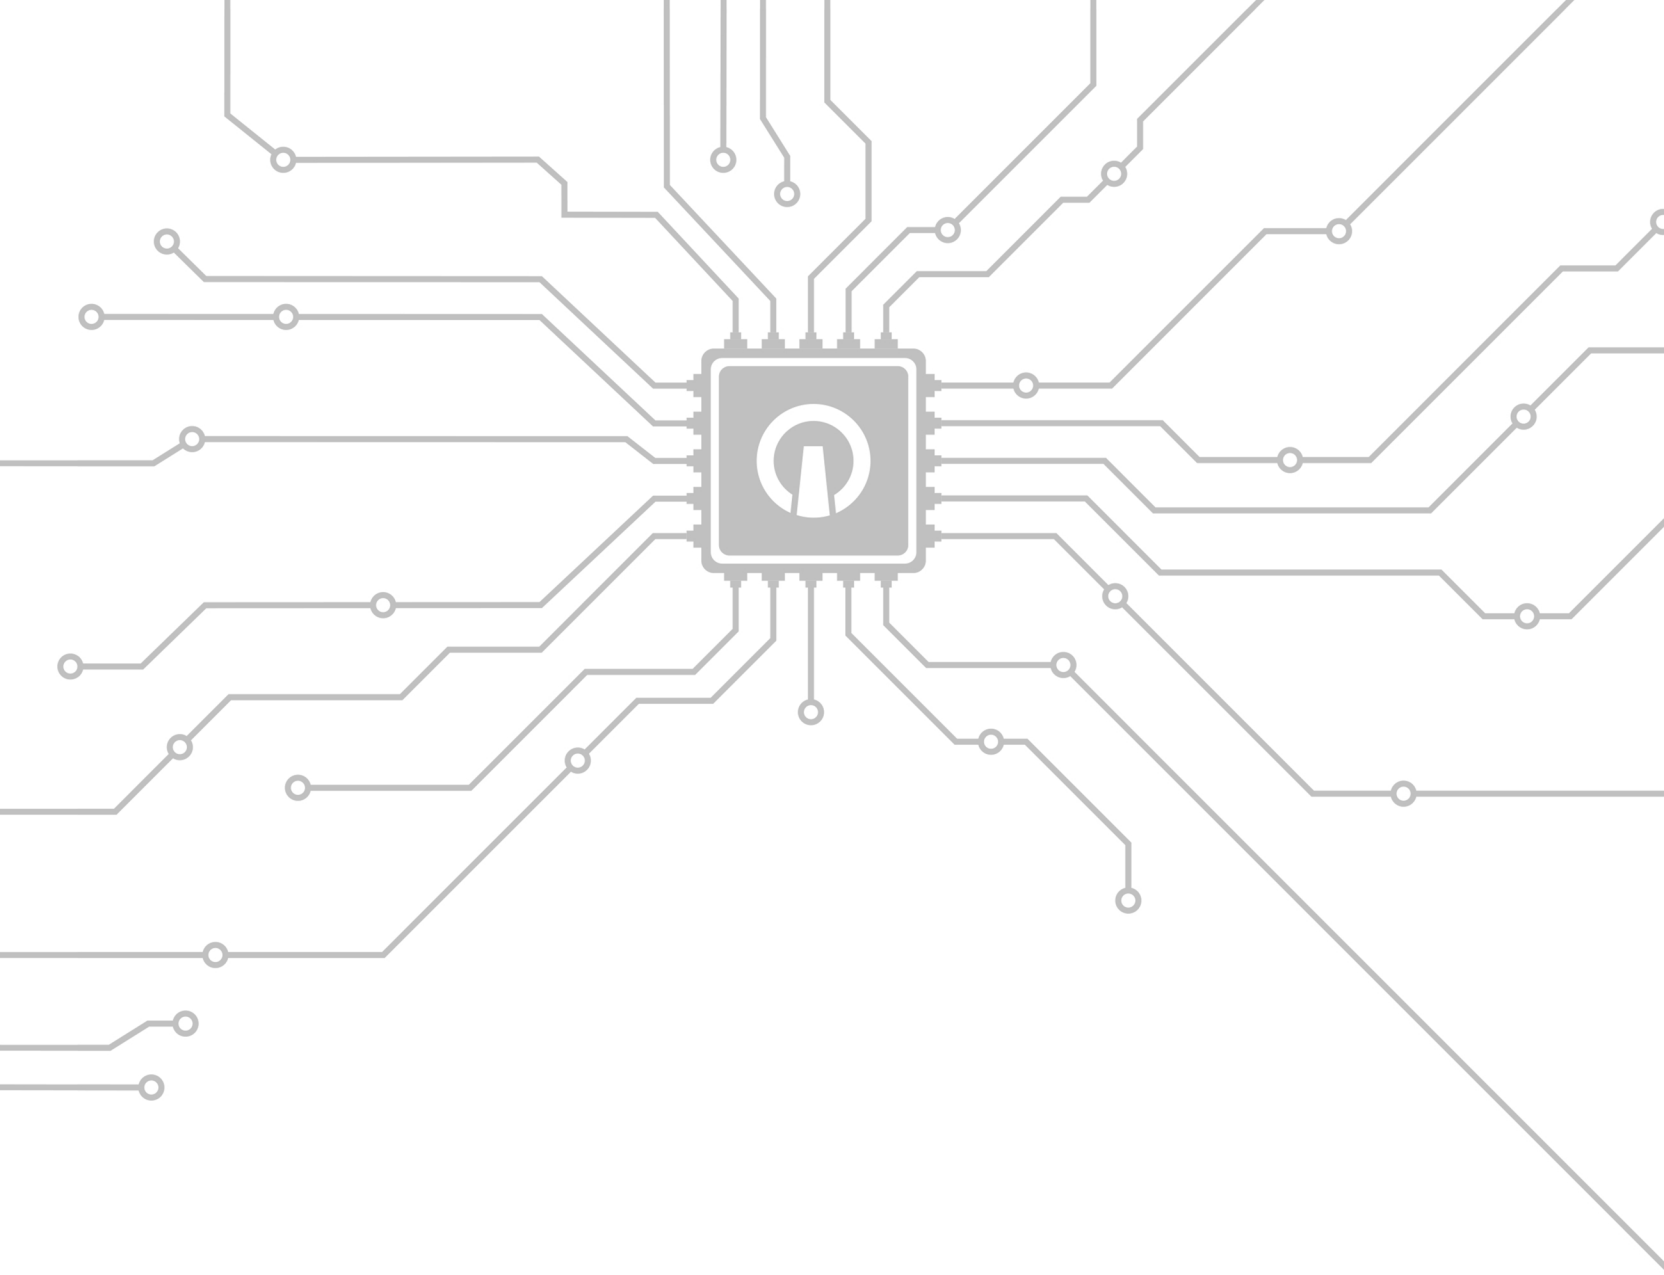

InterElcom Sp. z o.o.

NIP: 898218586 Regon: 021451864

T: +48 71 780 78 36 | T: +48 71 780 78 37

www.interelcom.com | info@interelcom.com