





cable gland

OVERALL SOLUTION EXPERT

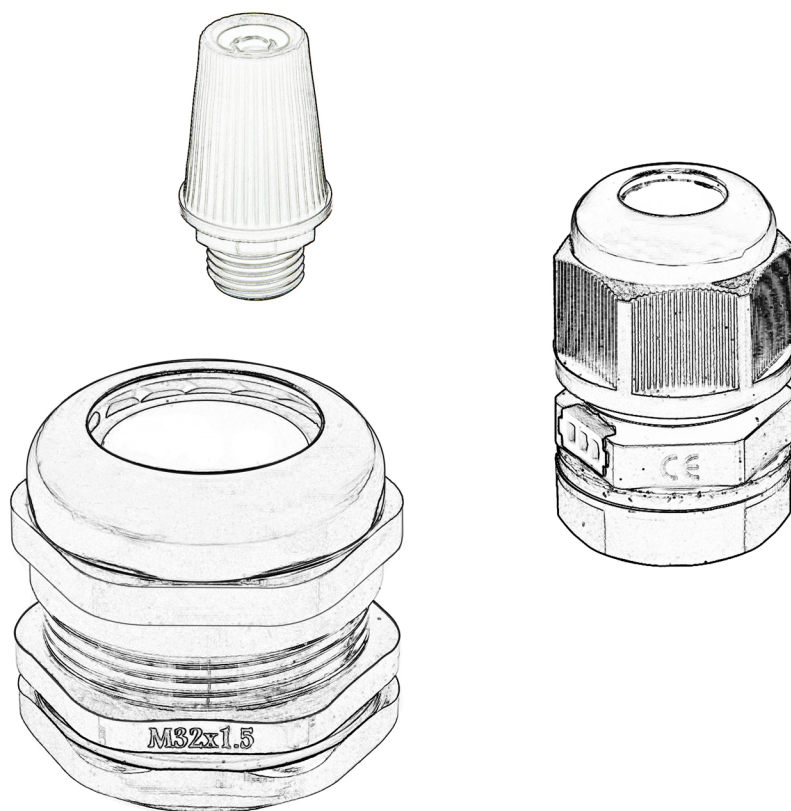


Nylon Waterproof Cable Gland Long Thread PG Type

- **Thread:** PG
- **Materials:** Part A.C.F is made of UL approved nylon PA66 (fire rating UL94V-2), part B.D butadiene rubber (NBR) or EPDM
- **Protection Degree:** IP68 (within fastening range, 0 type was her will be used in tightening part)
- **Working Temperature:** -40°C to 100°C in static state, instantaneous heat resistance up to 120°C; -20°C to 80°C in dynamic state, instantaneous heat resistance up to 100°C
- **Product Features:** Wide range for fastening cables, strong tensile strength, waterproof, dustproof, resistant to acid and alkali, alcohol, grease and general solvents
- **Color:** Light grey (RAL7035), black (RAL9005), other color can be customized according to request

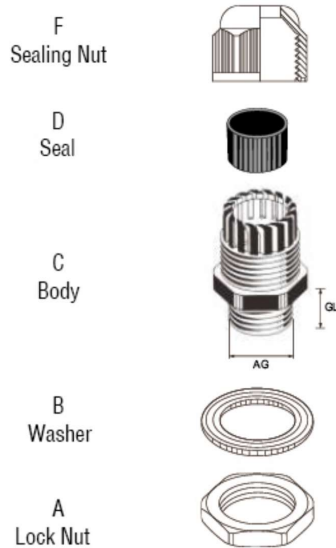

Model	Cable Range (mm)	Thread O. D. AG (mm)	Thread Length GL (mm)	Spanner Size (mm)
PG7	3-6.5	12.5	15	18/17
PG7	2-5	12.5	15	18/17
PG9	4-8	15.2	15	22/19
PG9	2-6	15.2	15	22/19
PG11	5-10	18.6	15	24/22
PG11	3-7	18.6	15	24/22
PG13.5	6-12	20.4	15	27/24
PG13.5	5-9	20.4	15	27/24
PG16	10-14	22.5	15	30/27
PG16	8-12	22.5	15	30/27
PG19	12-16	24	15	30/27
PG19	10-14	24	15	30/27
PG21	13-18	28.3	15	36/33
PG21	9-16	28.3	15	36/33
PG25	16-21	30	15	37/36
PG25	13-18	30	15	37/36
PG29	18-25	37	18	46/42
PG29	13-20	37	18	46/42
PG36	22-32	47	18	58/52
PG36	20-26	47	18	58/52
PG42	32-40	54	18	64/60
PG42	25-31	54	18	64/60
PG48	37-44	59.3	18	70/64
PG48	29-35	59.3	18	70/64
PG63	42-50	71	28	82/77
PG63	32-40	71	28	82/77



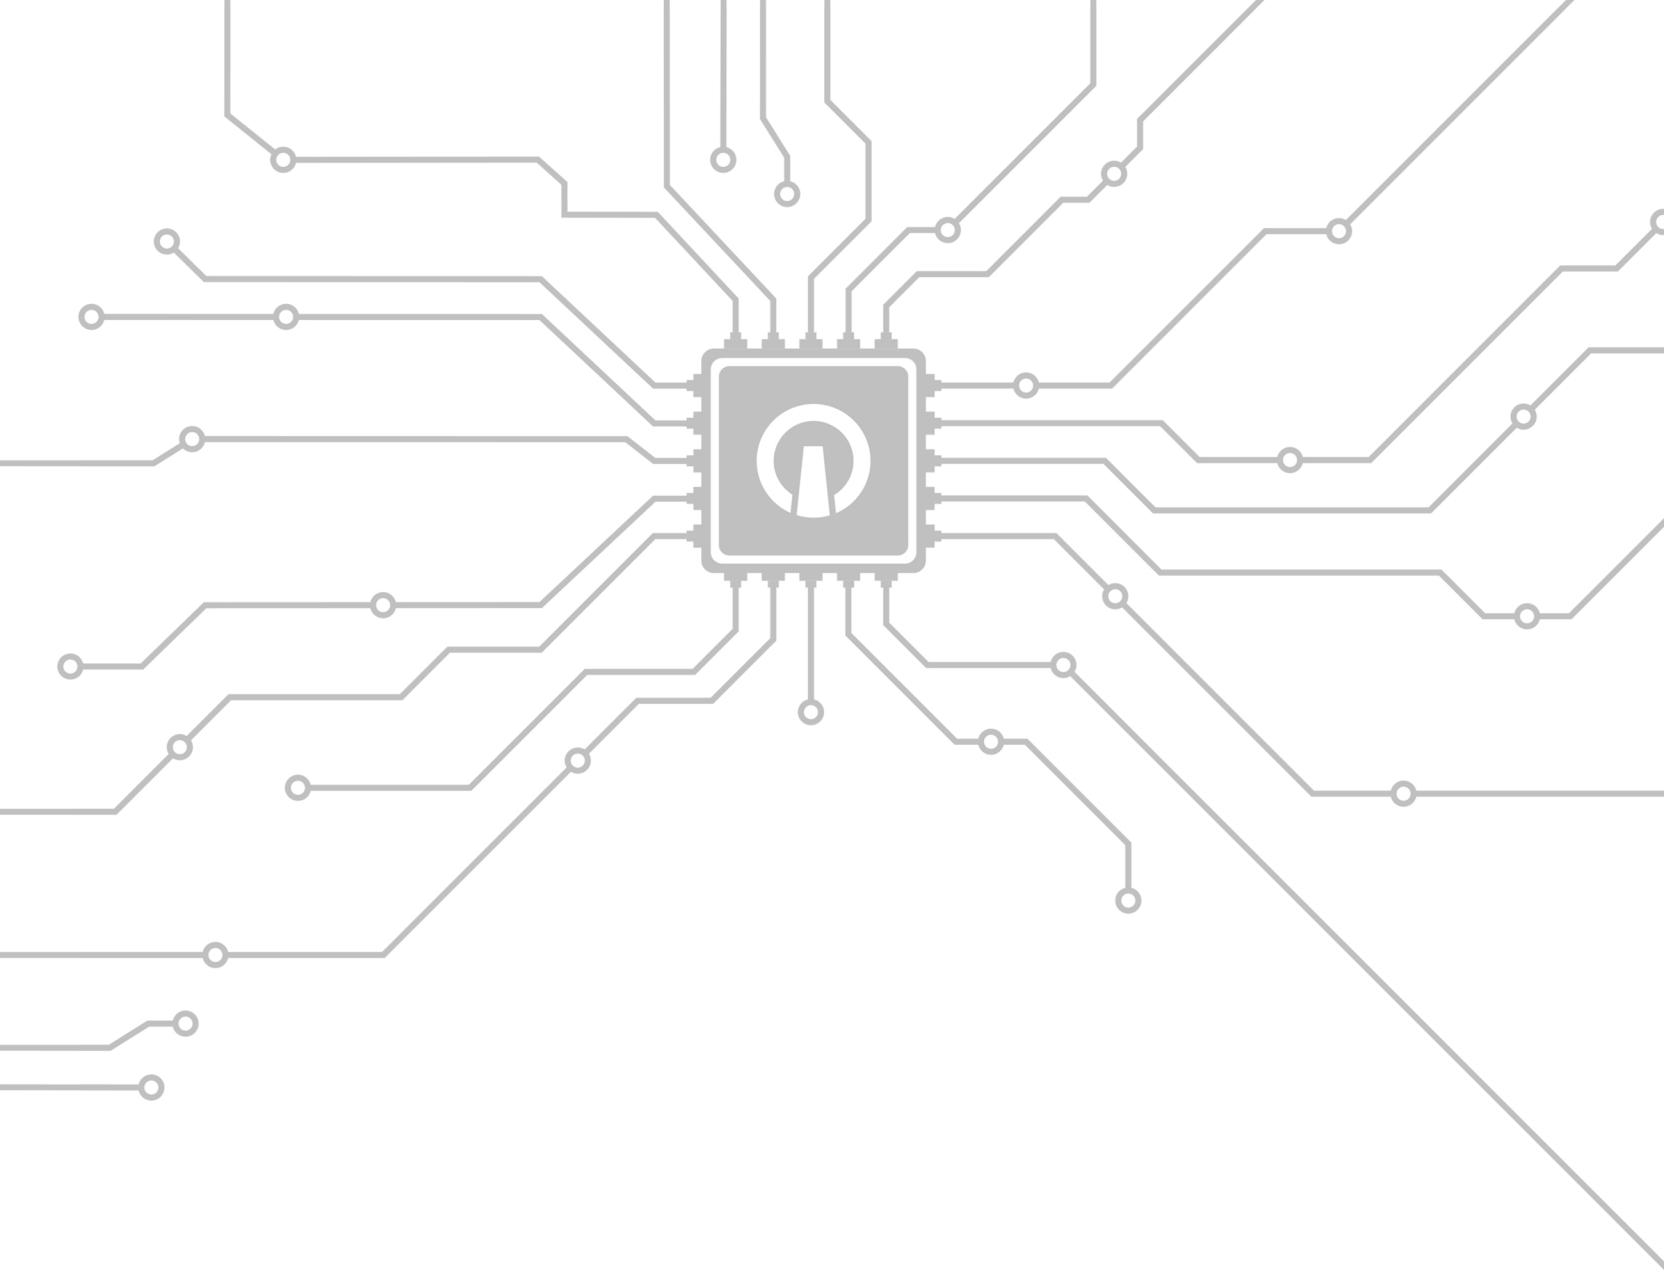

InterElcom Sp. z o.o.

NIP: 898218586 Regon: 021451864

T: +48 71 780 78 36 | T: +48 71 780 78 37

www.interelcom.com | info@interelcom.com