



REV.	DATE	MODIFICATION
1.0	20/25/12/03	First Issue

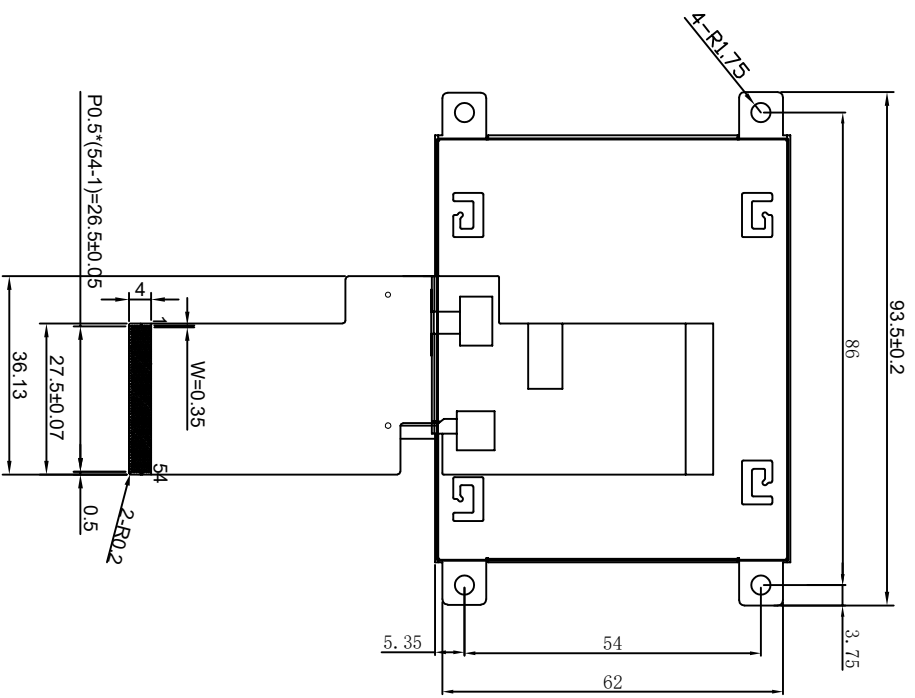

PIN SYMBOL	DESCRIPTION
1	VBL-
2	VBL-
3	VBL+
4	VBL+
5	NC
6	NC
7	NC
8	RESET
9	CS
10	SCL
11	SOL
12	BD
13	BT
14	B2
15	B3
16	B4
17	B5
18	B6
19	B7
20	G0
21	G1
22	G2
23	G3
24	G4
25	G5
26	G6
27	G7
28	R0
29	R1
30	R2
31	R3
32	R4
33	R5
34	R6
35	R7
36	HSYNC
37	VSYNC
38	DOTCLK
39	NC
40	NC
41	VCC
42	VCC
43	NC
44	NC
45	NC
46	NC
47	NC
48	XR
49	YD
50	XL
51	YU
52	DEN
53	GND
54	GND

- NOTES:
1. DISPLAY TYPE: 3.5 INCH TFT /TRANSMISSIVE
  2. BACKLIGHT: 6 CHIP WHITE LED, IN PARALLEL
  3. OPERATING TEMP: -20°C~+70°C
  4. STORAGE TEMP: -30°C~+80°C
  5. RESOLUTION: 320XRGBX240
  6. LCD IC: NV3035
  7. (\*)"Reference dimension, ""critical dimension
  8. RoHS Compliant

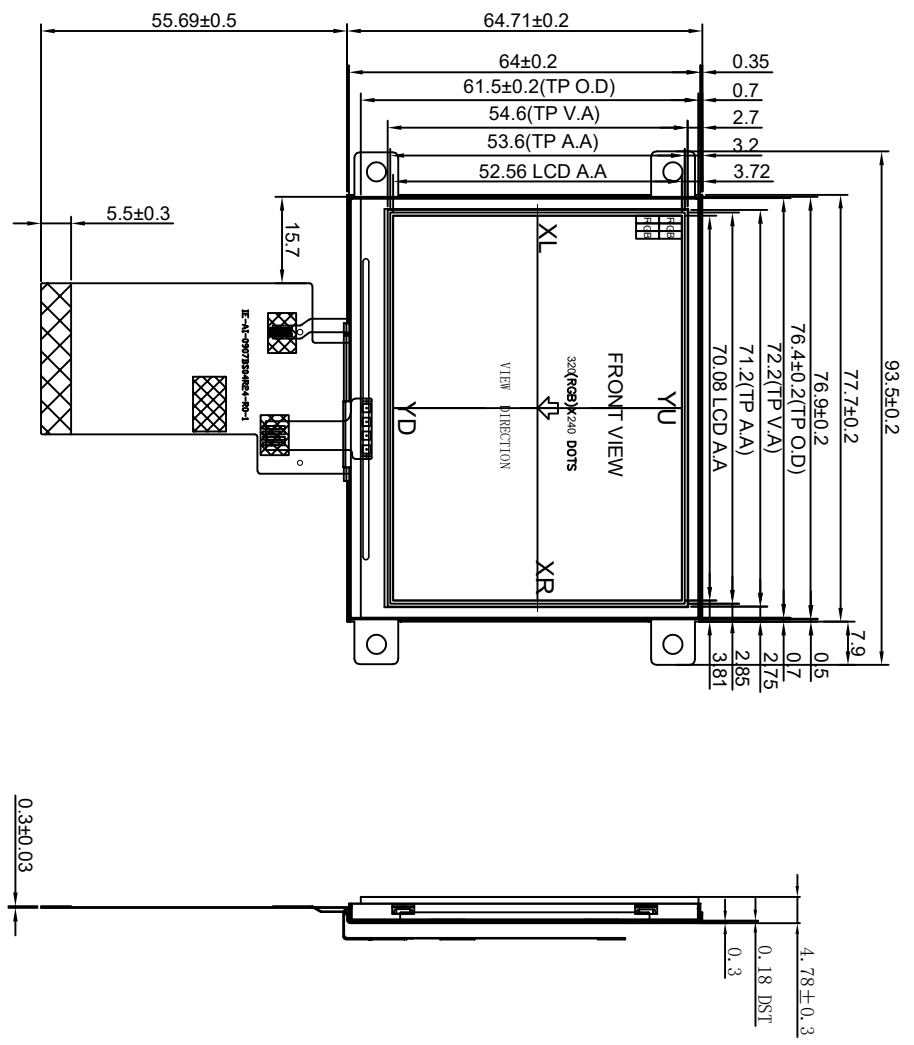

<b>INTERFACE</b>	RGB Interface	<b>MODEL NAME</b>	IE-AI-0907B504R24-RMF-K-1
	FPC Connector	<b>REV.</b>	1.0
<b>VIEWING DIRECTION</b>	12 O'clock	<b>SHEET OF</b>	1/1
<b>Gray Scale</b>		<b>TOLERANCE UNLESS SPECIFIED</b>	±0.3
<b>DIRECTION</b>	6 O'clock	<b>UNIT</b>	mm
		<b>SCALE</b>	1:1
		<b>PROJECTION</b>	3RD ANGLE

