

LED Display

Product Data Sheet

IE-2R-10391L-G

Spec No.:

Effective Date: Apr 11, 2016

FEATURES

0.39 inch (10.0mm) Digit Height
Low Power Requirement
High Brightness and High Contrast
Excellent Characters Appearance
IC Compatible , Easy Assembly
RoHS Compliant


DESCRIPTION

This is a 0.39 inch (10.0mm) digit height dual digit seven segment LED display. This device utilizes red LED chips, which are made from AlGaInP, and has a gray face and white segments.

DEVICE


Red	Description
IE-2R-10391L-G	Common Anode, Right Hand Decimal
Total 16 LED Chips	

PACKAGE DIMENSIONS

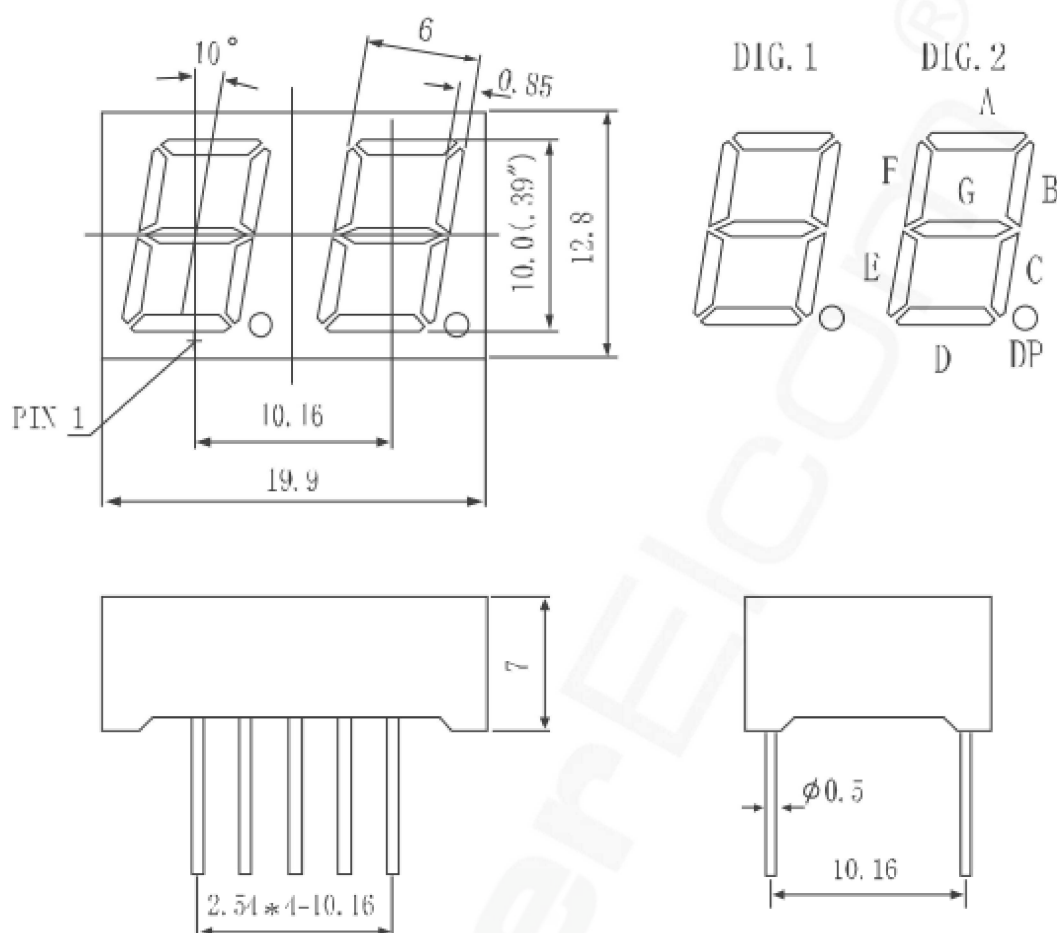

NOTES: All dimensions are in millimeters (inches). Tolerance is ± 0.25 (0.010") unless otherwise specified.

INTERNAL CIRCUIT DIAGRAM

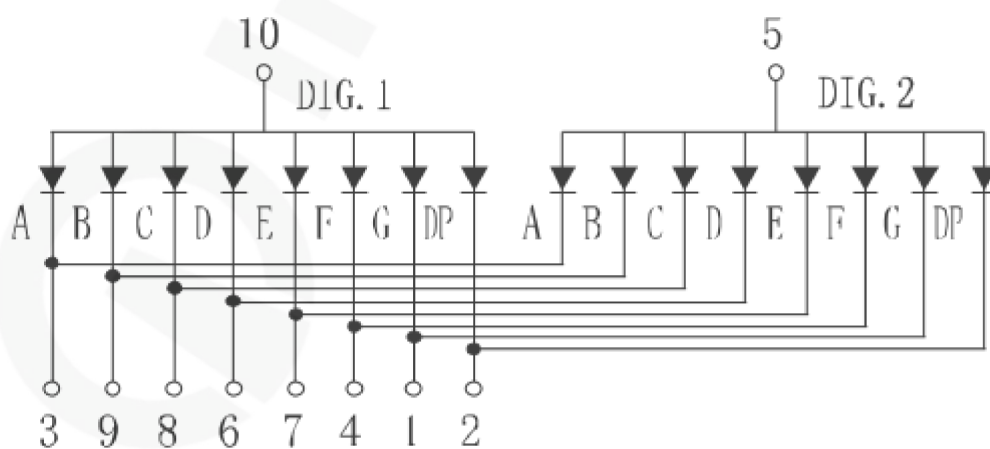

PIN CONNECTION

PIN NO.	CONNECTION
1	CATHODE G
2	CATHODE DP
3	CATHODE A
4	CATHODE F
5	COMMON ANODE DIG2
6	CATHODE D
7	CATHODE E
8	CATHODE C
9	CATHODE B
10	COMMON ANODE DIG1

ABSOLUTE MAXIMUM RATINGS AT Ta=25℃

PARAMETER	SYMBOL	AlGaInP RED	UNIT
Power Dissipation Per Segment	PAD	50	mw
Reverse Voltage Per Segment	VR	5	V
Continuous Forward Current Per Segment	IAF	20	mA
Peak Forward Current Per Segment(Duty-0.1,1KHz)	IPF	60	mA
Operating Temperature Range	TOPr	-20℃ to 80℃	
Storage Temperature Range	Tstg	-30℃ to 85℃	
Lead Soldering Temperature 260℃ at 1.6mm From Body for 3 second			

ELECTRICAL/OPTICAL CHARACTERISTICS AT Ta=25℃


AlGaInP RED L2

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Forward Voltage, Per Segment	VF	IF=20mA	1.9	2.0	2.5	V
Reverse Current, Per Segment	IR	VR=5V			50	μA
Peak Emission Wavelength	λp	IF=20mA	620	623	627	nm
Luminous Intensity Per Segment	IV	IF=20mA	70	77	84	mcd


TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES @ TA = 25°C

L2 Chip


RELATIVE INTENSITY VS. WAVELENGTH

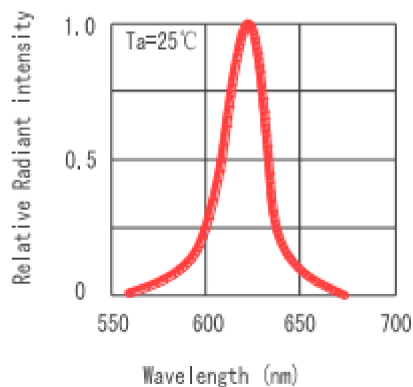


LUMINOUS INTENSITY VS. FORWARD CURRENT

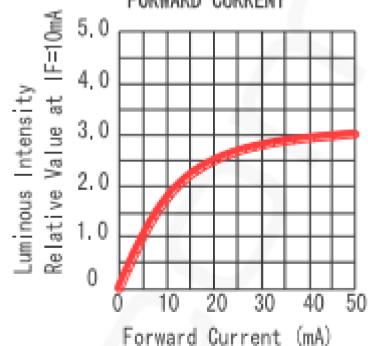


FORWARD CURRENT VS. FORWARD VOLTAGE



LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE

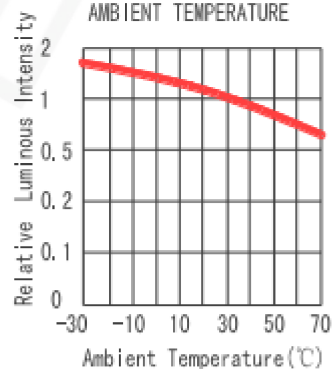

ALLOWABLE FORWARD CURRENT AMBIENT TEMPERATURE



Radiation Diagram $T_a=25^\circ\text{C}$

