



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC

Insulation Resistance:1000MΩ Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$




Contact Material:Brass

Contact Plating: Au or Sn Over Ni




Insulator Material: Polyester(UL94V-0)

Standard: PA6T

Soldering temperature: $260^{\circ}\text{C} \pm 5^{\circ}$ 5S

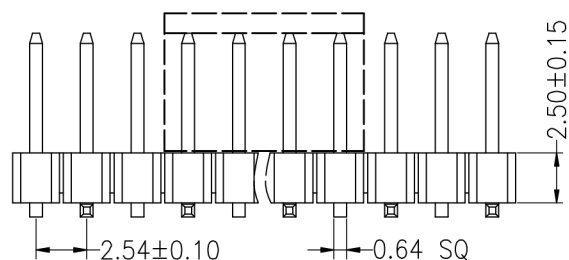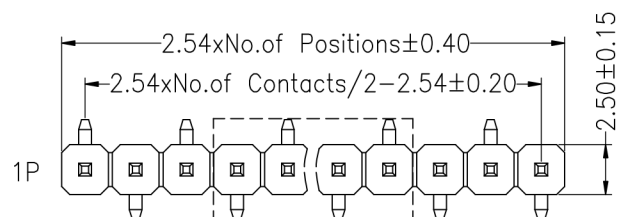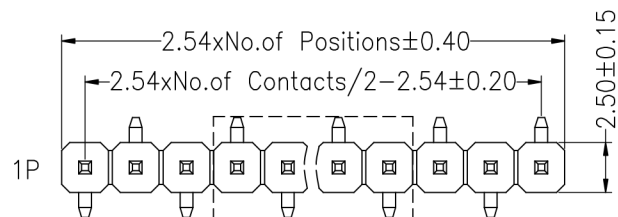

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

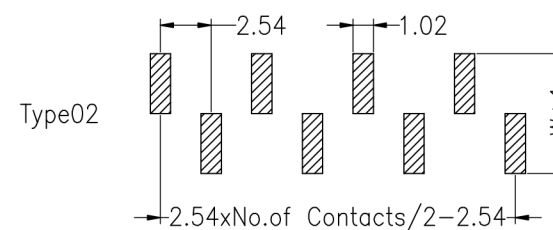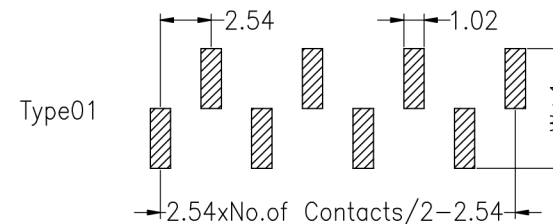

Dimension antitheses list			
ITEM	PA	PB	W
Standard	6.00	3.20	5.00

				OPERATION		DRAW			SCALE	FIT		
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4		
A0	2012.04.18	NEW DRAWING		X.XXX	±0.10				SHEET	1/1	TITLE:	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE			PROJ.			
				DIM	TOL							