



PRODUCT DATA SHEET

BASIC DIMENSIONS

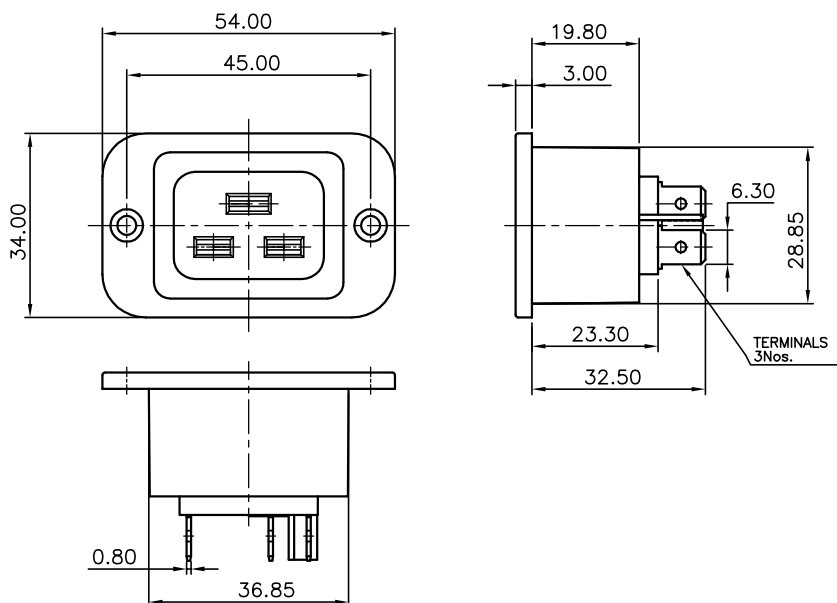

PANEL CUTOUT

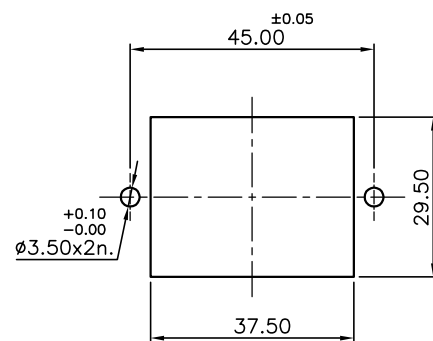

SPECIFICATION TABLE

SR.NO.	PARAMETER		REMARKS
1	V/A Rating		16A 250V AC (VDE), 20A 250V AC (UL, C,US)
2	Contact resistance (Initial)		10 m ohms max.
3	Insulation resistance at 500 V DC		1000 M ohms min.
4	H.V.Break down test (For 1minute)		2 KV AC
5	Panel thickness maximum		--
6	Mounting		Panel, Screw-type
7	Terminals		Solder-type or Fast-On
8	Withdrawal force:		4.5 to 6.1 kg.
9	Permissible temp.	(a) With/Without load	0 To 65°C
		(b) For Soldering	270°C for 5 Sec. max.
10	Material	(a) Body, Flame retardant	Nylon-6, GF20%, V-2
		(b) Contacts, Terminals	Brass, Tin plating
11	Reference standard		IEC 60320-1 ,UL498, CSA:22.2 NO.182.3
12	Approvals		

ORDERING CODE

EMO-28-W

Series

Withdrawal force :
4.5 to 6.1 kg.

PRODUCT : MAINS OUTLET						CODE : EMO-28-W	
4	Specs. updates	14.01.15	PPD	GJG	APP	13.12.07	PBM
3	Redrawn	25.01.11		PBM	CHK	13.12.07	GJG
B	Panel cut out add	absent	10.03.09	uaj	pbm	DRN	13.12.07
A	32.50max	32.00	08.09.08	uaj	pbm	BY	DATE
REV	IS	WAS	DATE	SIGN	APP.	BY	SIGN
UNSP.TOLERANCE		DIMNS. IN mm	WT(Gm) Max.	SCALE:- NTS.	PROJECTION	SHEET	DRAWING NUMBER
OVER	-	1	10				
UP TO	1	10	-				
±	0.2	0.3	0.5				
Moulding, plating details as per Bill of Material				1 OF 1		P E M O 9 2 8 W	
Unspecified colour is Black, GF:Glass filled.						REVISION 4	



ELCOM HOUSE
M.B.LOHIA MARG
413/1/1-A,
GANDHINAGAR
KOLHAPUR-416 119

Elcom International Pvt. Ltd.