


Item	Date	Remark
A	20240821	Original Drawing
A	20241012	Modify the module structure

PIN	NAME
1	LEDK
2	GND
3	FWMARK
4	SDA
5	RS
6	SCL
7	CS
8	RESET
9	IOVCC28
10	VCC28
11	VCC28
12	GND
13	GND
14	LEDA
15	LEDA

TP PIN

NO.	SYMBOL
1	VDD2V8
2	CTP_RST
3	CTP_INT
4	CTP_SCL
5	CTP_SDA
6	GND

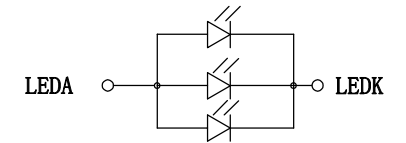

If=60mA Vf=2.7~3.1V

NOTES:

1. DISPLAY TYPE:1.69"IPS TFT/TRANSMISSIVE/NORMALLY BLACK
2. VIEWING DIRECTION: A11
3. DRIVER IC:ST7789
4. OPERATING TEMP.: -20° C~70° C
5. STORAGE TEMP.: -30° C~80° C
6. BACKLIGHT: 3 CHIP-WHITE LED
7. LCM Luminance:500 CD/M2(TYP)
8. UNMARKED TOLERANCE:±0.2
9. 建议机壳开窗可视区比 LCD A.A区单边大 0.3mm
10. 产品符合ROHS标准

Customer Approval Signature						Drawing Number	Rev.
Unless Otherwise Specified						1.5" TFT+CTP	B
Unit	mm	Title	IE-T-2932CH07S-CB-1				Material
General Roughness							Soda Lime / Polyimide
Tolerance		Drawn	E. E.	Panel / E.	P. M.		
Dimension	±0.2	By	Letter	Kevin		Scale	Sheet
Angle	±1	Date	20241012	20241012		1:1	1 of 1
						Size	A3