

Specification for approval

(CUSTOMER P/N): IE-4R-10361N

(DESCRIPTION):

(DATE): 2014 12 23

■ FEATURES:

- High intensity and reliability
- High quality, Low power requirement and low cost
- IC compatible , Easy assembly
- Meet RoHS EU Directive
- ESD 2000V (HMB)

■ DESCRIPTION:

- 0.36 Inch Four Digits Display
- Common Anode
- Black face, white segment
- Luminous Color:
1、 RED
2、
3、
4、
5、
- Chips Materials
1、 AlGaInP
2、
3、
4、
5、

Type :
IE-4R-10361N




■ **ABSOLUTE MAXIMUM RATINGS AT $T_a=25^{\circ}\text{C}$:**

PARAMETER	SYMBOL	RED	UNIT
Power Dissipation Per Segment	PAD	50	mw
Reverse Voltage Per Segment	VR	5	V
Continuous Forward Current Per Segment	IAF	20	mA
Peak Forward Current Per Segment(Duty-0.1,1KHz)	IPF	60	mA
Operating Temperature Range	TOPr	-20℃ to 80℃	
Storage Temperature Range	Tstg	-30℃ to 85℃	
Lead Soldering Temperature 260℃ at 1.6mm From Body for 3 second			


■ **ELECTRICAL/OPTICAL CHARACTERISTICS AT $T_a=25^{\circ}\text{C}$:**

PARAMETER	SYMBOL	TEST CONDITION	Color	MIN	TYP	MAX	UNIT
Forward Voltage ,Per Segment	VF	IF=20mA	RED	1.9	2	2.5	V
Reverse Current , Per Segment	IR	VR=5V	RED			50	μA
Peak Emission Wavelength	λ_p	IF=20mA	RED	630	633	637	nm
Luminous Intensity Per Segment	IV	IF=20mA	RED	23	25	28	mcd


RELATIVE INTENSITY VS. WAVELENGTH

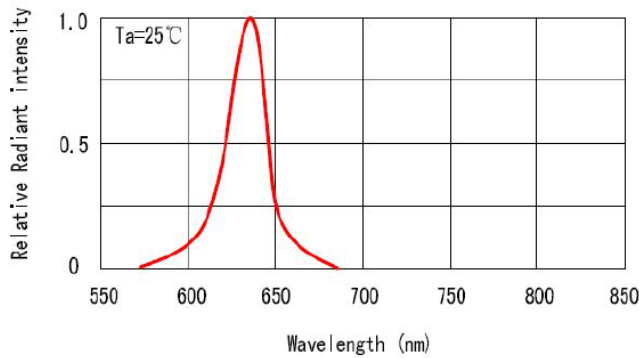


FORWARD CURRENT VS.
FORWARD VOLTAGE




LUMINOUS INTENSITY VS.
FORWARD CURRENT




ALLOWABLE FORWARD CURRENT
AMBIENT TEMPERATURE



LUMINOUS INTENSITY VS.
AMBIENT TEMPERATURE



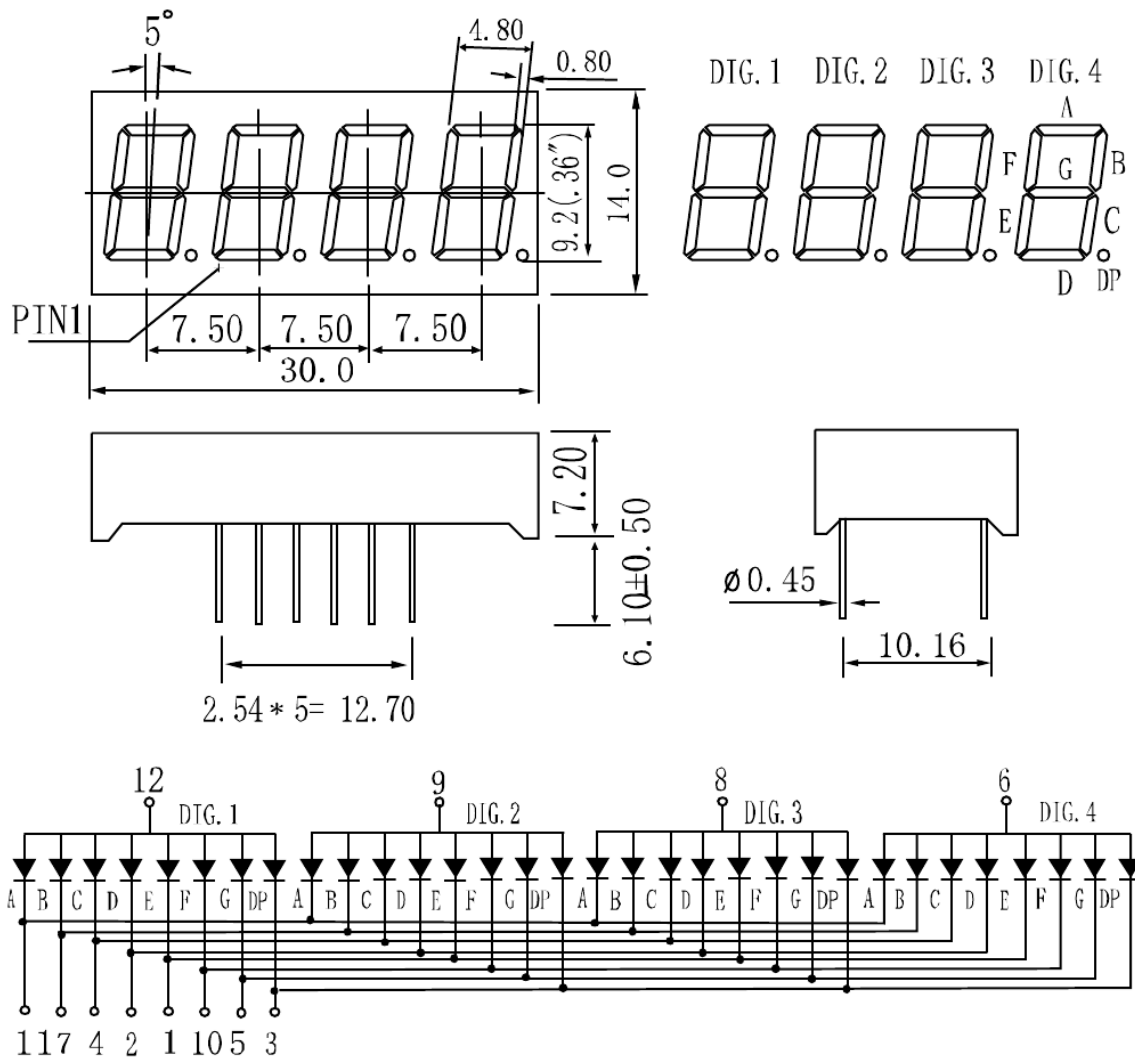

NOTES : 1. All dimensions are in millimeters. (inches)

2. Tolerance is $\pm 0.25(0.010")$ unless otherwise specified.