



PRODUCT DATA SHEET


BASIC DIMENSIONS

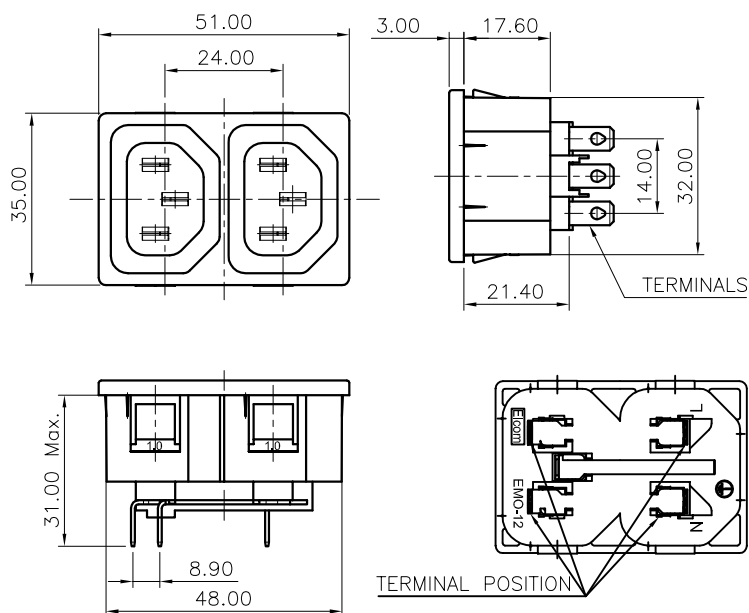


PANEL CUTOUT

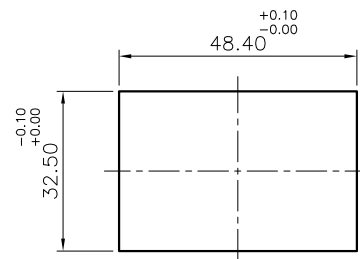

90° Bend TERMINAL DETAILS—

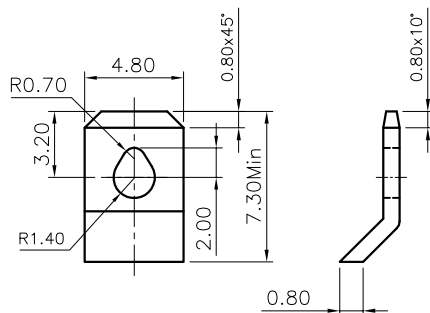


90° TERMINAL DETAILS—

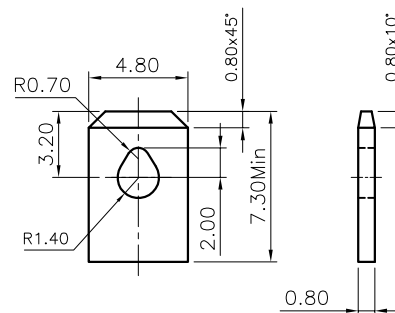

SPECIFICATION TABLE

SR.NO.	PARAMETER		SPECIFICATIONS
1	V/A Rating		10A 250V AC (VDE), 20A 250V AC (UL, C,US)
2	Contact resistance (Initial)		10 m ohms max.
3	Insulation resistance at 500 V DC		1000 M ohms min.
4	H.V.Break down test (For 1minute)		2 KV AC
5	Panel thickness maximum Other : Available on request *		Standard : 1.00 mm (A)
6	Mounting		Panel, Snap-In
7	Terminals		Solder-type / Fast-on
8	Permissible temp.	(a) With/Without load	0 To 65°C
		(b) For Soldering	270°C for 5 Sec. max.
9	Material	(a) Body, Flame retardant	Nylon-6, GF20%, V-2
		(b) Contacts, Terminals	Brass, Tin plating
10	Reference standards		IEC-60320-1
11	Approvals		

						PRODUCT : C13x2 Live & Nuetral Isolated				CODE : EMO-12-A-2V2															
						APP	07.10.15	GJG	 ELCOM HOUSE M.B.LOHIA MARG 413/1/1-A, GANDHINAGAR KOLHAPUR-416 119																
						CHK	07.10.15	PGP																	
						DRN	07.10.15	Vicky																	
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN	Elcom International Pvt. Ltd.																
UNSP.TOLERANCE				DIMNS. IN mm		WT(Gm) Max.		SCALE:- NTS.		PROJECTION		SHEET		DRAWING NUMBER											
OVER	-	1	10	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.										1 OF 1		P	E	M	O	2	2	1	2	REVISION	
UP TO	1	10	-													R0									
±	0.2	0.3	0.5													R0									