

LITHIUM BATTERY TYPE:CR123A

CR123A

Key Characteristics

High and stable operating voltage

Low self-discharge rate(less than 3% after 1 year storage at 25°C

+25°C
3%

Operating temperature -40°C~+60°C
-40°C~+60°C

Hermetically glass-to-metal sealing

Nickel-plated steel container

Organic electrolyte

Spiral type

UL MH46528) CE SGS recognized
UL MH46528) CE SGS

ISO9001:2008 approved
ISO9001:2008

AIG Insurance
AIG

Warning

Fire, explosion and severe burn hazard.

•

Do not recharge, crush, disassemble, heat, above 212°F 100°C incinerate, short circuit or expose contents to water

•

Do not reverse the positive and negative pole of battery while using it;

•

Do not solder directly on the battery

•

Dispose of used batteries promptly.

•

Characteristics

Nominal capacity(10mA-2.0V).....1400mAh

Nominal voltage.....3.0v

Max.constant current.....2000mA

Max.pulse current.....3000mA

Weight.....20g

Volume.....Φ 17.0X34.5mm

Workable temperature.....-40°C +60°C



Main applications

Utility meters electricity meters water meters gas meters AMR

Security systems door lockers smoke alarm sensors detectors

CMOS memory and RTC backup

Vehicle tracking

Industrial clocks


Sea buoys remote monitoring systems industrial clocks

Military electronics

Any information here is for reference only. Information is also dependent on actual conditions of use does not guarantee future performance. And subject to change.

LITHIUM BATTERY TYPE:CR123A

CR123A

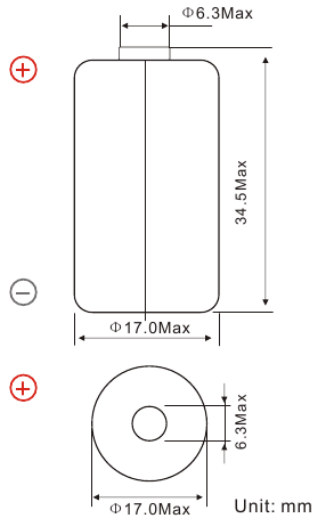


+ Available terminations:

- /P axial pins
- T/PT2 radial pins
- /PT/TP polarized tabs


- /P
- T/PT2
- /PT/TP

+ Available terminations can be made as requested.


Discharge Characteristics

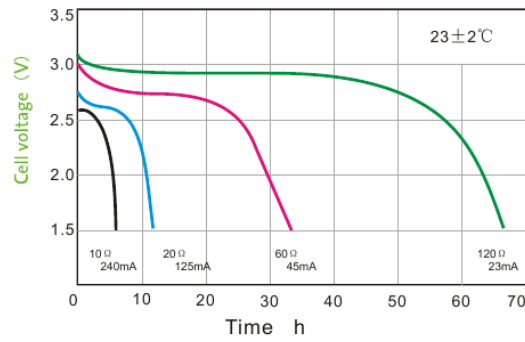

Temperature Characteristics

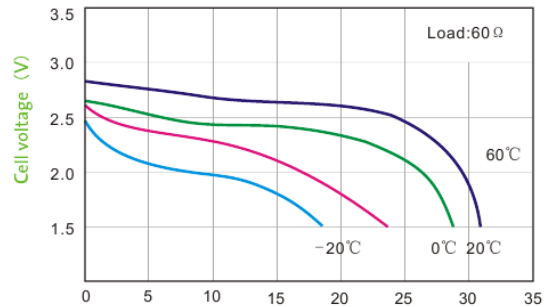

Storage characteristics

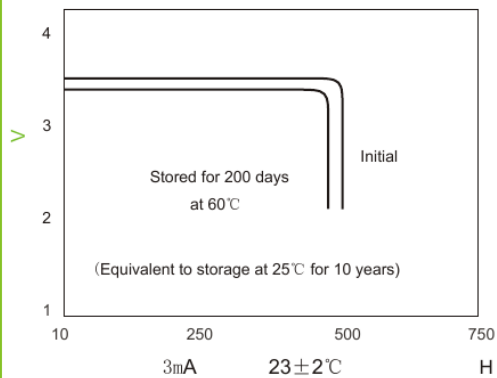

Load-Capacity Characteristics

