


0.36" 4-Digit LED Display

Model NO. : IE-4PG-10361NC-L3.5

Chip (Ta=±25℃)		PIN	Drive Mode	Face
Quantity	Emitting color	—	Common Anode	
32ea	Pure Green			Black

Package Outlines


(unit:mm)

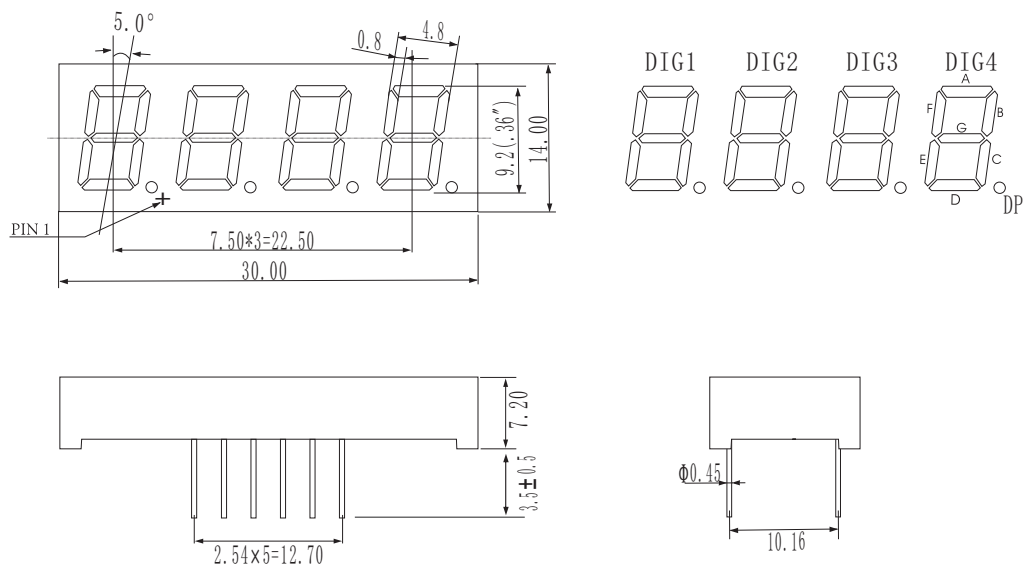

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerances is ± 0.25 (0.01") unless otherwise noted.

Internal Circuit:

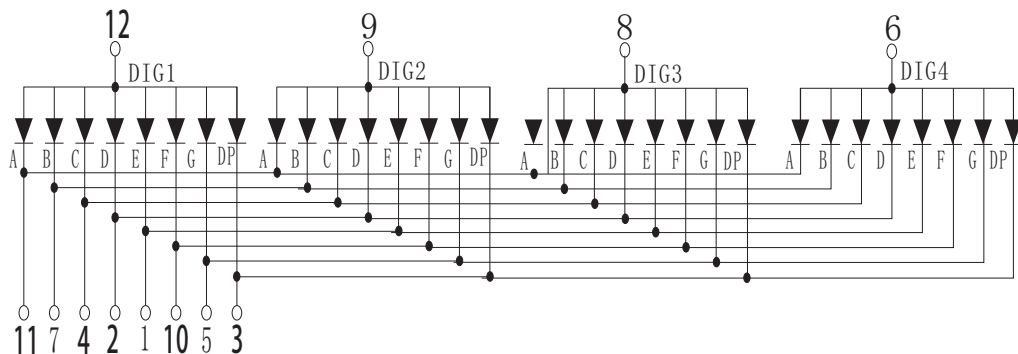

0.36" 4-Digit LED Display

Model NO. : IE-4PG-10361NC-L3.5

■ Absolute Maximum Ratings (Ta=+25℃)

Characteristics	Symbol	Rating	Unit	Remarks
Forward current / segment	I_F	30	mA	——
Peak forward current / segment	$I_{F(Peak)}$	100	mA	1/10 Duty Cycle
Reverse Voltage / segment	V_R	5	V	——
Operating Temperature	T_{Opr}	-25~+80	℃	——
Storage Temperature	T_{Stg}	-40~+85	℃	——
Solder Temperature	T_{Sol}	260	℃	≤5 seconds
Power Dissipation / segment	P_d	80	mw	——

■ Electro-Optical Characteristics (Ta=25℃) :

Parameter	Symbol	Test condition	Min.	Typ.	Max.	Unit
Forward Voltage/segment	V_F	$I_F=20mA$	2.6	3.0	3.6	V
Dominant Wavelength	λ_d	$I_F=20mA$	515	520	525	nm
Spectrum width (Half value)	$\Delta\lambda$	$I_F=20mA$	——	20	——	nm
Luminous Intensity/segment	I_V	$I_F=20mA$	——	120	——	mcd
Reverse current/segment	I_R	$V_R=5V$	——	——	10	μA