



SPECIFICATIONS

Rated Current: 3.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40℃ to +105℃

Contact Material: Brass

Contact Plating: Au Over Ni





Insulator Material: Polyester(UL94V-0)

Resistance To Soldering Heat:

245℃±5℃, 10s(PBT insulator)

260℃±5℃, 10s(PA6T&PA9T&LCP insulator)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

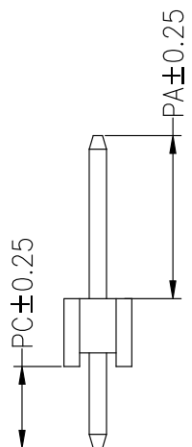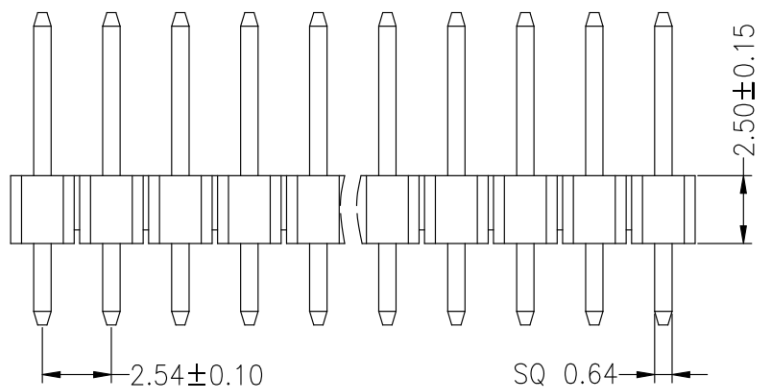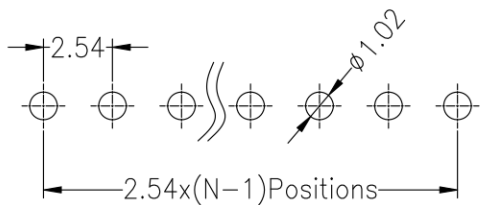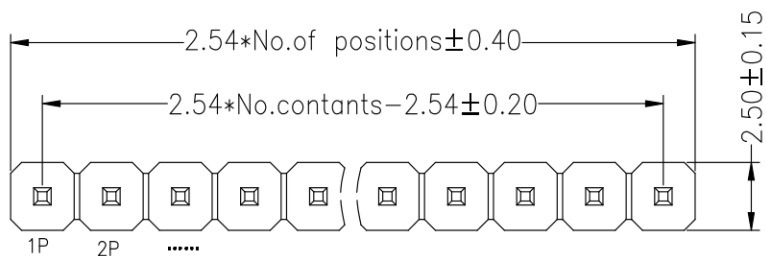

Dimension antitheses list		
ITEM	PA	PC
Standard	6.00	3.00

				OPERATION		DRAW	RICH LIN	23.06.17	SCALE	FIT			
				X.X	± 0.30				UNIT	mm			
				X.XX	± 0.20	CHECK			SIZE	A4	PART NO.		
A0	2023.06.17	NEW DRAWING		X.XXX	± 0.10				SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE				PROJ.		TITLE:	
				DIM	TOL								