


Cell Type CR1220

Specifications

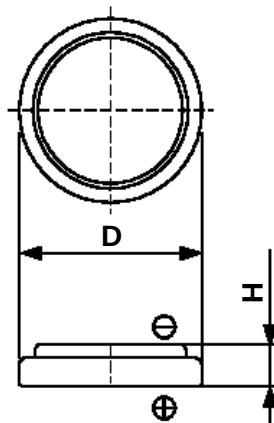

Nominal Voltage (V)		3
Nominal Capacity (mAh) ^{*1}		36
Standard Discharge Current (mA)		0.1
Operating Temperature Range (°C) ^{*2}		-20 ~ +70
Max. Dimensions (mm)	Diameter (D)	12.5
	Height (H)	2.0
Approx. Weight (g)		0.8


*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.

*2 Consult with FDK when using batteries at temperatures exceeding -20°C to +60°C range.

Typical Characteristics


Continuous Discharge Characteristics of CR1220

Temperature : 20°C / 温度 : 20°C

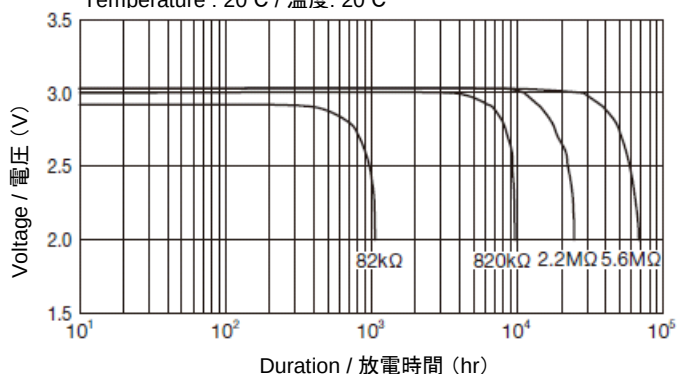


Temperature Characteristics of CR1220

Discharge Load : 30kΩ / 放電抵抗 : 30kΩ

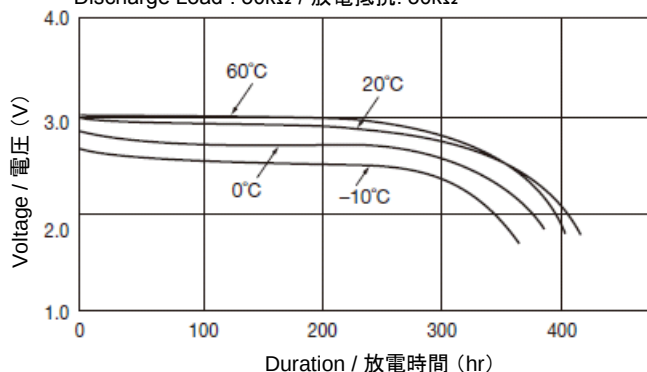

Pulse Discharge Characteristics of CR1220

Temperature : 20°C / 温度 : 20°C

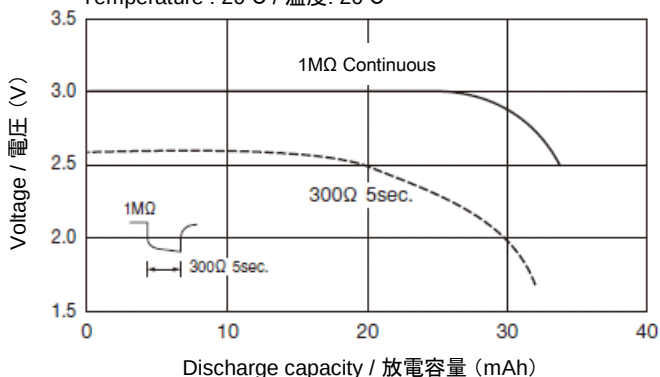

Discharge Load vs. Discharge Capacity of CR1220

End voltage : 2V / 終止電圧 : 2V

