
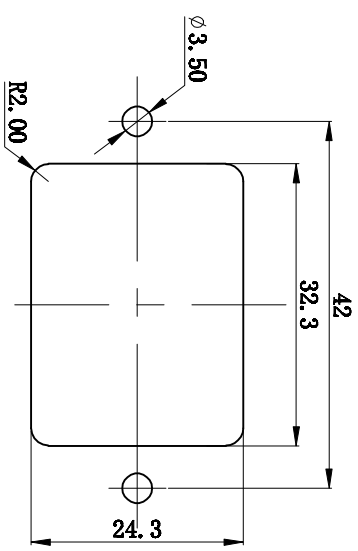
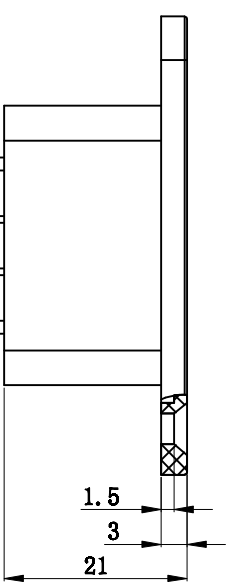
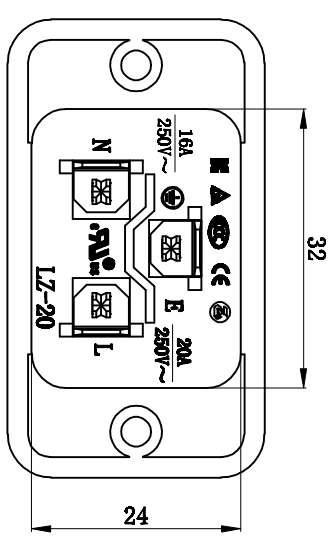
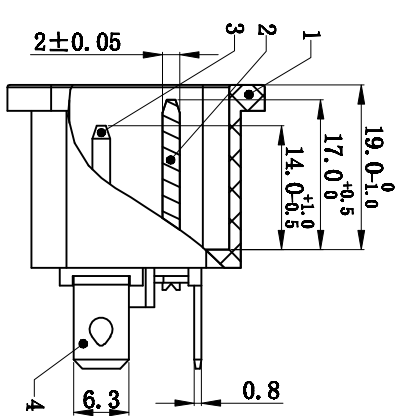


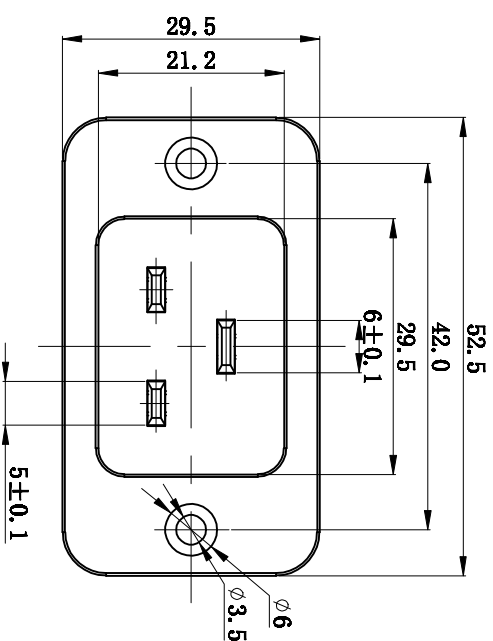

No.	Name	Material	Qty
1	Base	PAG6	1
2	Grounding pin	Brass t2.0	1
3	current-carrying pin	Brass t2.0	2
4	Quick connect terminal	Brass t0.8	3

PANEL CUT-OUT

Rating : 16A, 250Vac KC CE 3C TUV
 20A, 250Vac UL cUL
 Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min
 terminals to Base: 3750V AC (50-60Hz) 1min
 Leakage Current : 1mA
 Insulation Resistance: $\geq 100M\Omega$ 500V DC
 Glow wire temp: 750°C

A4				COMMON TOLERANCE :										 YUEQING LANZ ELECTRONICS CO., LTD									
A3																							
A2				UP TO 5		±0.20		UNIT		mm		PROJECTED				PRODUCT NAME		Ac Inlet C20		SCALE		Free	
A1				ABOVE 5 TO 30		±0.30				DRAWN BY		WU YU		CHECKED BY				DWG NO.		LZ-20-1			
				ABOVE 30		±0.50																	
REV.	DATE	REVISION	DESCRIPTION	ISSUE		ANGULAR		±5°		DATE		2023. 12. 25		APPROVAL BY				MODEL NO.		LANZ/CRS-LZ201			