



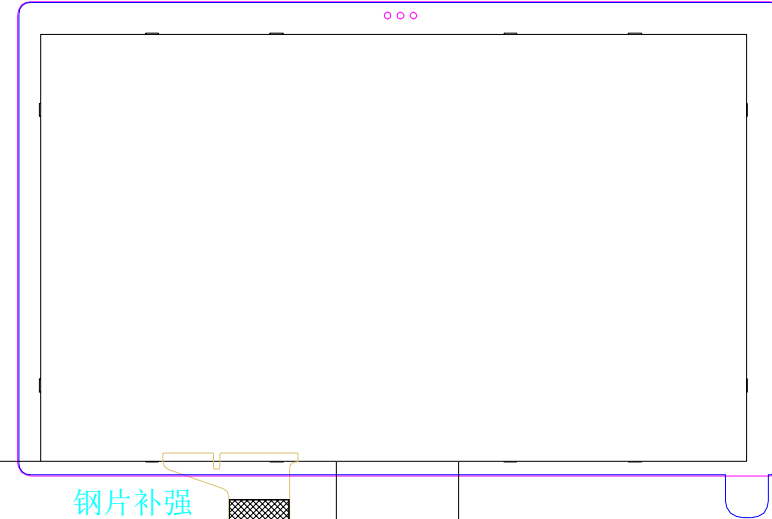

Pin	Pin Name
1	VLED+
2	VLED+
3	VLED-
4	VLED-
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

- 1.LCD Display Type: 262K TFT, TRANSMISSIVE;
- 2.Backlight:27-chips LED, VLED=9.0V, ILED=180MA;
- 3.LCD View Direction:any angle;
- 4.LCD Driver IC:ST7277;CTP Driver IC :FT5426
- 5.CTP Type:G+G;
- 6.Operating temperature:-20 ℃~+70 ℃;
- 7.Storage temperature:-30 ℃~+80 ℃;
- 8.Recommended Case Open Area should be less than Module V.A;
- 9.General Tolerance:±0.3;
- 10.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

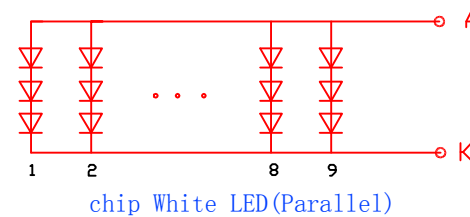

1	INT
2	SDA
3	SCL
4	RESET
5	GND
6	VDD

IE-SN-1816CH06R24L-C0-1

DRAWN BY:	2024.03.12			SCALE:		MATERIAL:
CHECK BY:				1:1		
APPROVER:		UNIT:	TOLERANCE:	PAGE:		
		mm	+0.2	1 of 1		