


# SPECIFICATION FOR APPROVAL

<b>Customer Name</b>	
<b>Product Name</b>	Through Hole-LED
<b>Model No.</b>	IE-P05THBW6000
<b>Description</b>	5mm Bullet White LED
<b>Date</b>	2007/9/1
<b>Sample No.</b>	

<b>Client (Signature) :</b> DD    MM    YYYY
--


## Package Dimensions

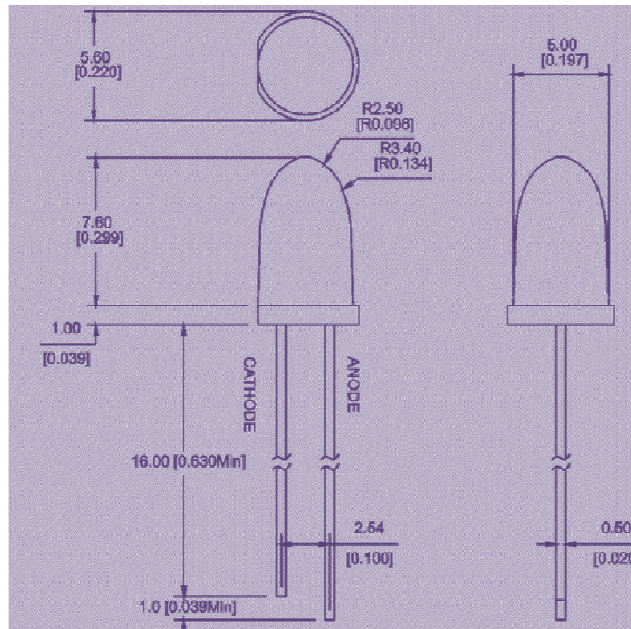

### Notes

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}$  (0.010") unless otherwise noted.
3. Protruded resin under flange is 1.0mm (0.04") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.

## Spatial Distribution

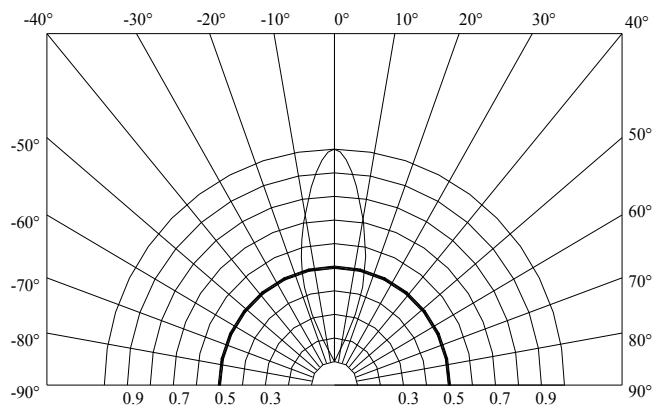

PART NUMBER	REV	PAGE	DATE
IE-P05THBW6000	R101	1/3	2007-09-01

**Electrical / Optical Characteristics at TA=25°C**






Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	LM	20000	22000	25000	mcd	IF = 20mA
Viewing Angle	2 θ 1/2	10		15	deg	IF = 20mA
Dominant Wavelength	Tc	6000		7000	K	IF = 20mA
Spectral Line Half-Width	Δ λ				nm	IF = 20mA
Forward Voltage	VF	3.0	3.2	3.5	V	IF = 20mA
Reverse Current	IR			20	μ A	VR = 5V

**Absolute Maximum Ratings at TA=25°C**

Parameter	Maximum Rating
Power Dissipation	0.06W
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	60mA
Continuous Forward Current	20mA
Derating Linear From 30°C	0.5mA/°C
Reverse Voltage	5V
Operating Temperature Range	-20°C to + 80°C
Storage Temperature Range	-30°C to + 100°C
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds

PART NUMBER	REV	PAGE	DATE
IE-P05THBW6000	R101	2/3	2007-09-01

## Typical Electro-Optical Characteristics Curves

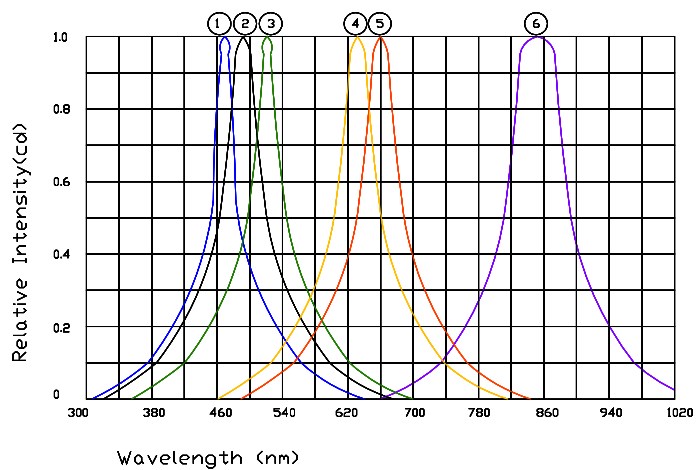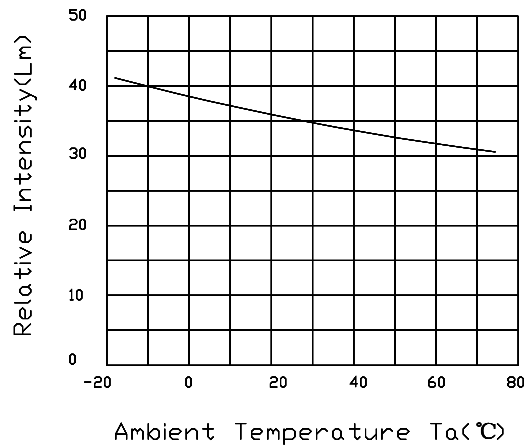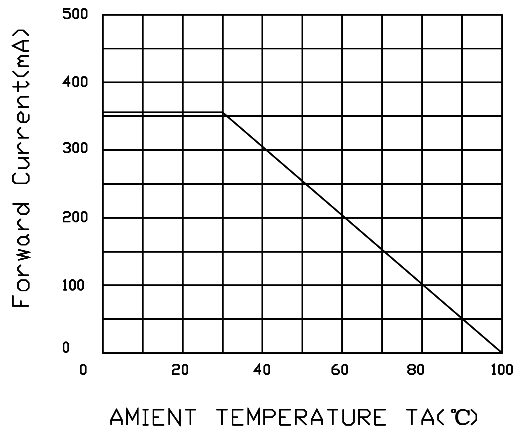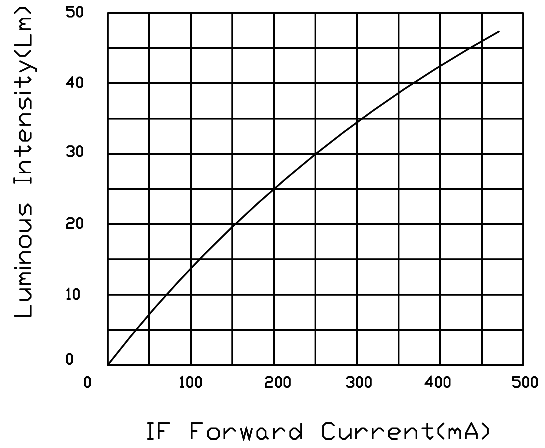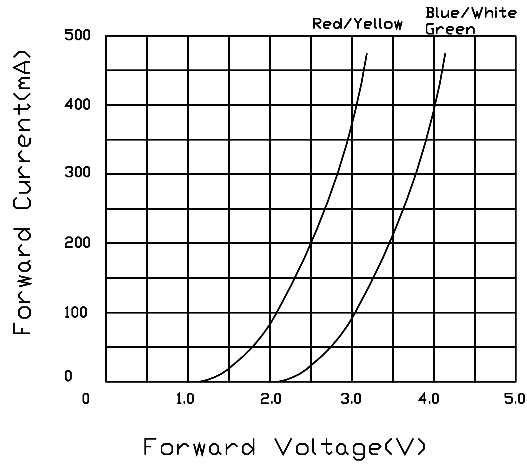

- ① Blue Lamp(InGaN)
- ② White Lamp(InGaN)
- ③ Pure Green Lamp(InGaN)
- ④ Yellow Green Lamp(AlInGaP)
- ⑤ Red Lamp(AlInGaP)
- ⑥ Infrared Lamp(850nm)

PART NUMBER	REV	PAGE	DATE
IE-P05THBW6000	R101	3/3	2007-09-01