



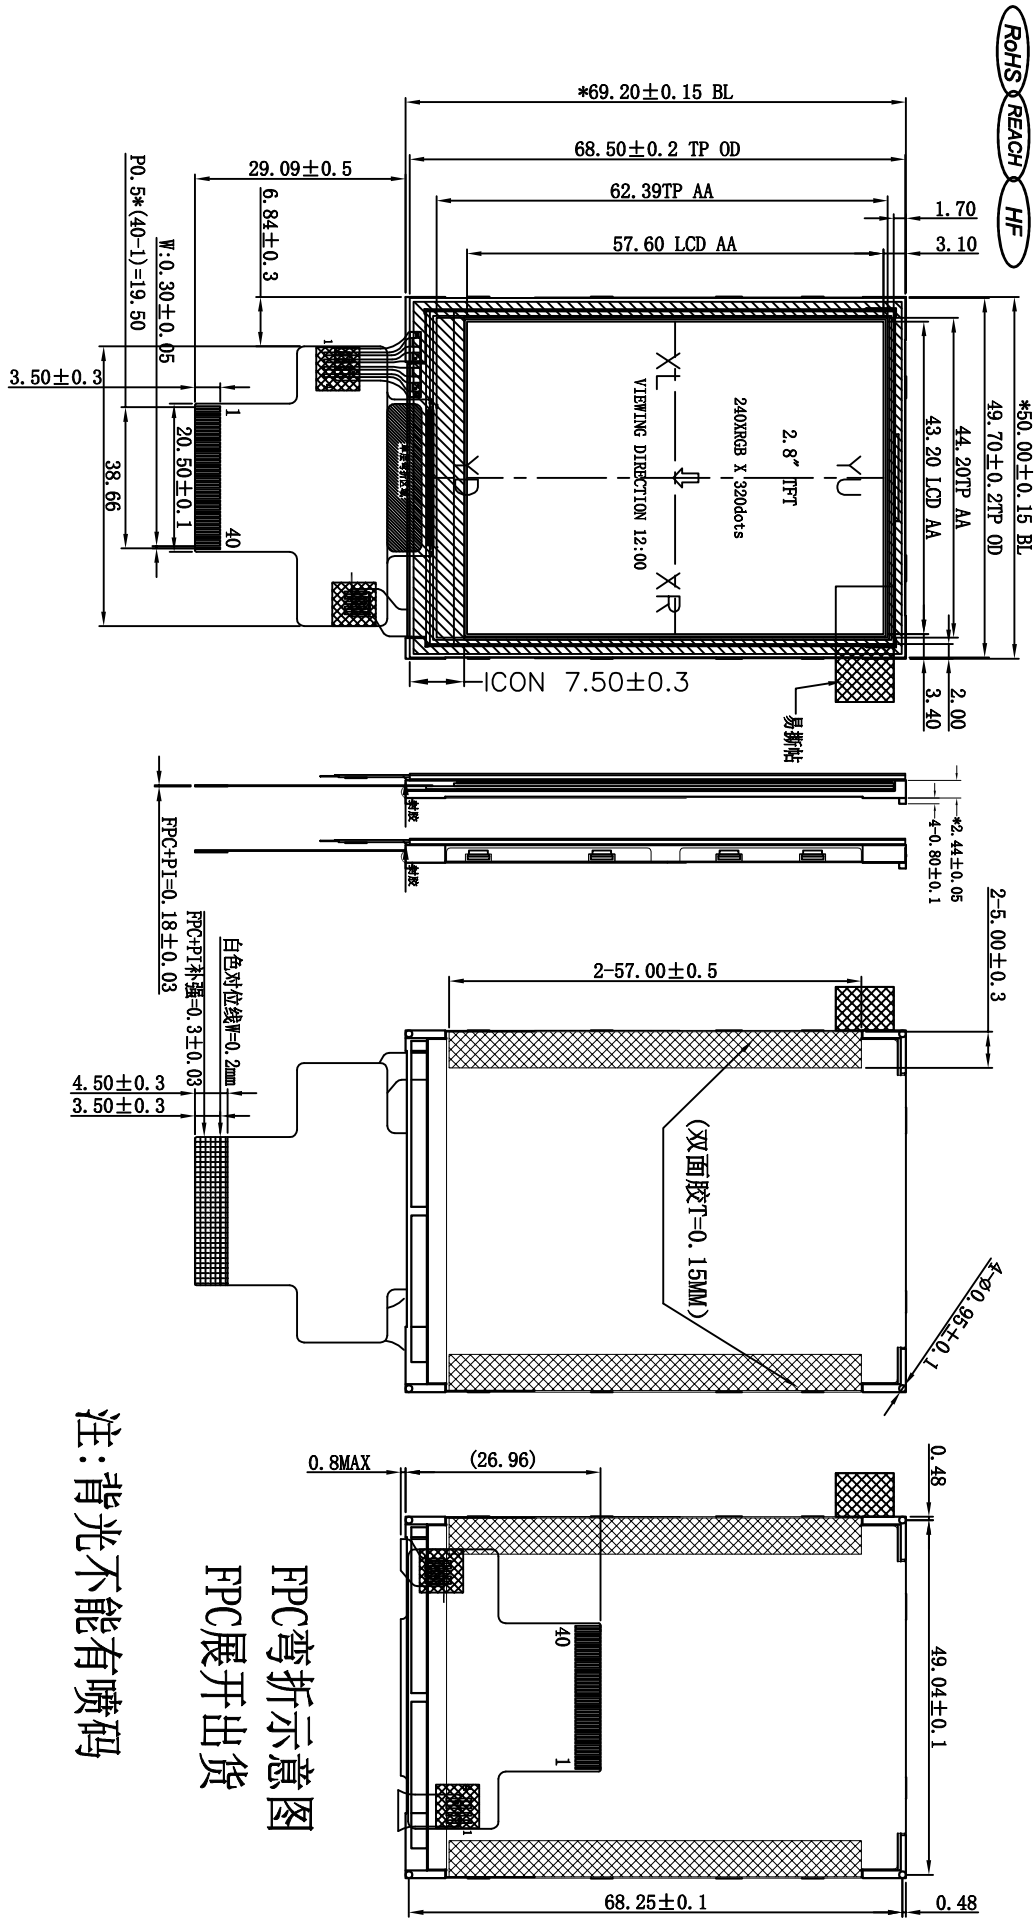

FPC弯折示意图
FPC展开出货

注:背光不能有喷码

- Note: **RoHS**
1. Display Mode: 2.8' TFT/TN
 2. Driving Condition: VDD=2.8~3.3V
 3. Viewing Direction: 12H
 4. Operating Temp: -20°~+70° C
 5. LCD: -30°~+80° C
 6. IC: EWV 0.22T 上粗砂下光
 7. Backlight: ST7789T3-G4-1
 8. Unspecified tolerance is ±0.20mm
 9. RoHS Request
 10. CONTROL DIMENSION: *
 11. REFERENCE DIMENSION: ()
- Storage Temp: WHITE LED*4 LCM 300-350cm/m2



背光电路图
(CIRCUIT DIAGRAM LED*4, 2.8' 2V,ILED=80mA)

InterElcom				CD
LCM NO. : IE-A-0706BV03P/S-R0-1	DWG NO. :			
DRAWN BY : MZJ	CHECKED BY : ZLH	APPROVED BY : LZJ	UNIT: mm	SIZE: A4
			SHEET: 1	OF 1