


REV	DESCRIPTION	MODIFY BY	DATE
AO	First	LZZ	2023-09-18

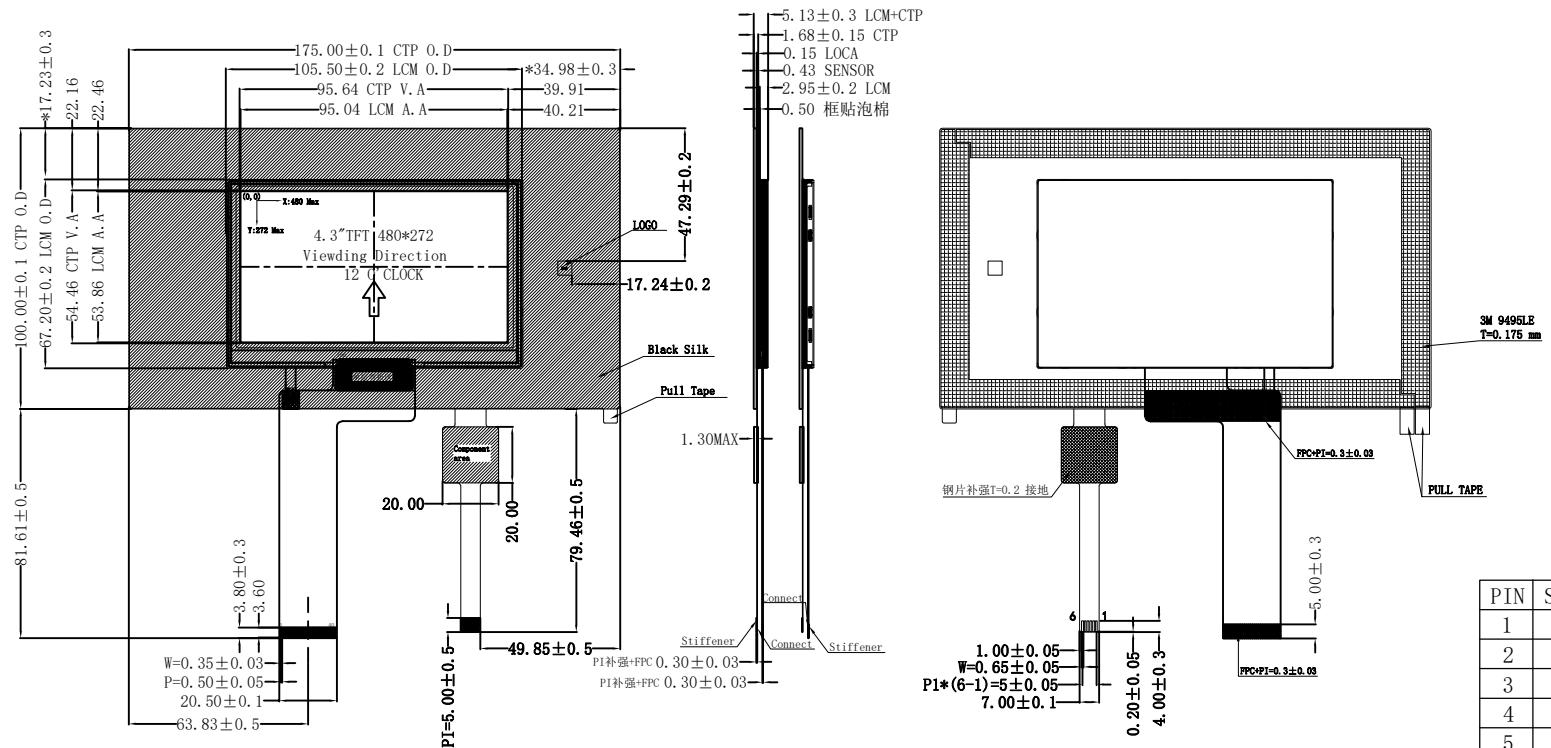


PIN	SYMBOL
1	VLED-
2	VLED+
3	GND
4	VDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

PIN	SYMBLE
1	SDA
2	SCL
3	RST
4	INT
5	VDD
6	GND

技术参数:

- 1、结构G+FF: Cover Glass+LOCA+ITO GLASS+FPC+adh, Cover Glass: 1.1mm, LOCA:0.15mm, ITO FILM:0.43mm,总厚度: 1.68±0.15mm;
- 2、IC型号: FT5446 (COF), 支持5点触摸, 工作电压:3.3V, IO电压: 3.3V;
- 3、表面硬度: ≥6H; 透光率: ≥85%



LED CIRCUIT DIAGRAM
If=20mA, Vf=19.6~23.1V

NOTES:

1. Display size:4.3" 480*272 TFT;
2. Driver IC:ST7282A;
3. Viewing direction:12H;
4. Display mode:Transmissive/Normal White/Anti-glare;
5. Operation temperature:-20° C~+70° C;
6. Storage temperature:-30° C~+80° C;
7. Brightness:250cd/m² (CTP Typ) ;
8. Unspecification tolerance are ±0.2mm;

Approved By		SIZE:
Checked By		DWARING_NO. : IE-A-1110BH02R24-CBBR-1
Drawn By	LZZ	CUSTOMER_NO.
UNIT:mm		