



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c





Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Max.Processing Temp:

(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second

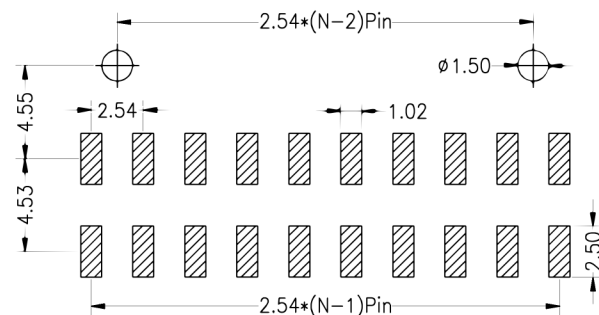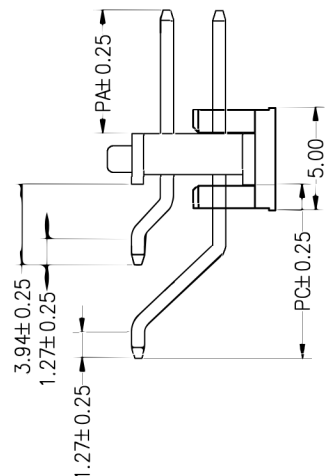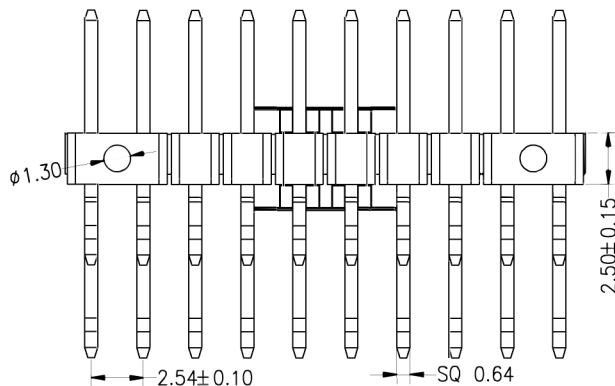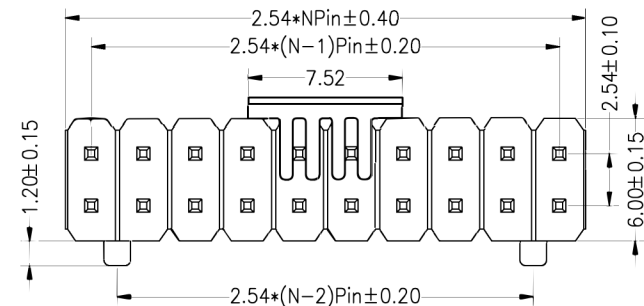

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list		
ITEM	PA	PC
Standard	6.00	8.50

OPERATION		DRAW		2022.11.18
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	± 3°	APPROVE		
DIM	TOL			

PROJ.	PROJ.
-------	-------

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.11.18	NEW DRAWING	