

cable gland
OVERALL SOLUTION EXPERT





RoHS  CE SGS

Stainless Steel Waterproof Cable Gland PG Type

- **Thread:** PG
- **Materials:** Stainless steel A C F
part E is made of UL approved nylon PA66(fire rating UL94V-2),part B,D butadiene rubber (NBR) or EPDM
- **Protection Degree:** IP68 (within fastening range,0 type was her will be used in tightening part)
- **Working Temperature:** -40°C to 100°C in static state, instantaneous heat resistance up to 120°C
- **Product Features:** Wide range for fastening cables, strong tensile strength, waterproof, dustproof, resistant to acid and alkali, alcohol, grease and general solvents

Model	Cable Range (mm)	Thread O. D. AG (mm)	Thread Length GL (mm)	Spanner Size (mm) 
PG7	3-6.5	12.5	6	14
PG9	4-8	15.2	7	17
PG11	5-10	18.6	7.5	20
PG13.5	6-12	20.4	7.5	22
PG16	10-14	22.5	7.5	24
PG19	10-15	24	8	25
PG21	13-18	28.3	8	30
PG25	15-20	30	9	33
PG29	18-25	37	9	40
PG36	25-32	47	10	50
PG42	32-38	54	11	57
PG48	37-44	59.3	11	64

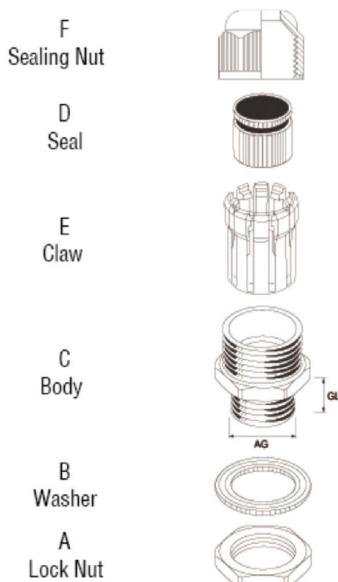

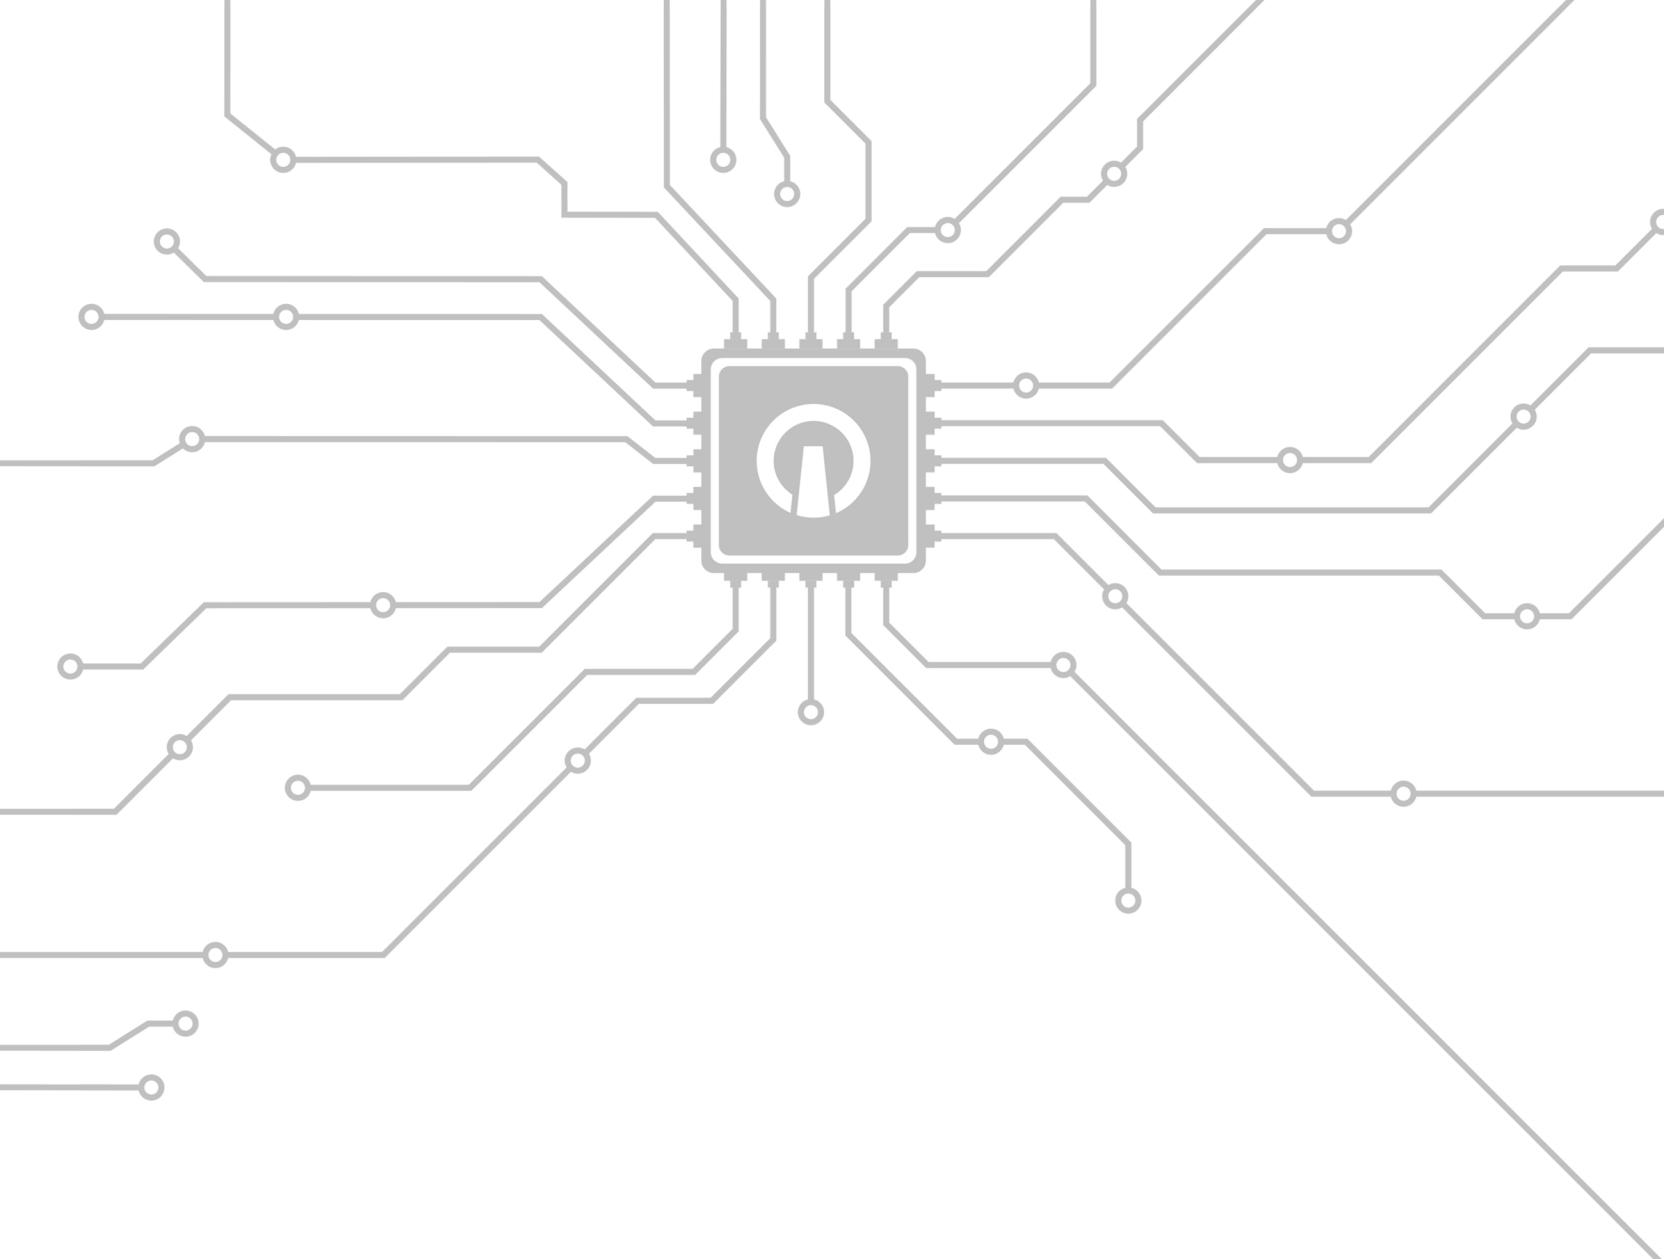

InterElcom Sp. z o.o.

NIP: 898218586 Regon: 021451864

T: +48 71 780 78 36 | T: +48 71 780 78 37

www.interelcom.com | info@interelcom.com